


698 – 6000 MHz

Catalogue 2012

Base Station Antennas, Filters, Combiners and Amplifiers for Mobile Communications

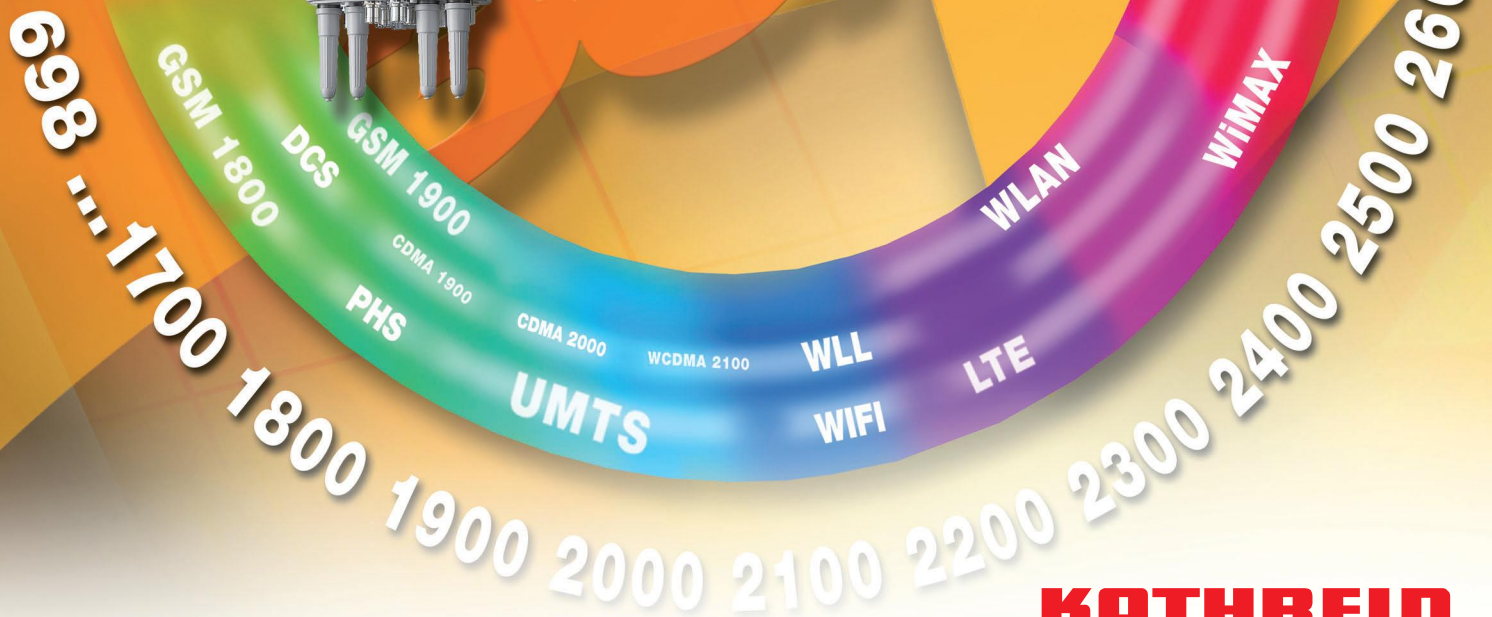

KATHREIN

Antennen · Electronic

Photo on title page: Kathrein offers a full range of products for Mobile Communication Networks over the current used frequency ranges.

Catalogue Issue 01/2012

All data published in previous catalog issues hereby becomes invalid.
We reserve the right to make alterations in accordance with the requirements of our customers,
therefore for binding datas please check valid data sheets on our homepage: www.kathrein.de!

Please note:

As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.

The mechanical design is based on the environmental conditions as stipulated in ETS 300 019-1-4 and thereby respects the static mechanical load imposed on an antenna by wind at maximum velocity.

Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of an antenna or even cause it to fall to the ground.

These facts must be considered during the site planning process.

The details given in our data sheets have to be followed carefully when installing the antennas and accessories.

In addition, please use our information brochure about mounting configurations.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

Calculation of Wind Loading on Kathrein Base Station Antennas

In 1998 the co-ordinating committee of the Standardisation Group for Building Standards decided that during the harmonisation process of European standards, the DIN-Standards shall be modified and republished based on the European Pre-Standards.

As a result of this harmonisation process the new edition of DIN 1055 Part 4 was finally published in 2005. This standard defines the worst case loading example created by natural wind forces on bearing structures and their individual elements. The standard thereby defines the principles for calculating the maximum loading and for confirming the bearing capacity of structures in general.

One of the major changes in the calculation of the wind load under DIN 1055-4 is the definition of the value c_{f0} . Due to these changes in the calculation formula within the standard, the calculated wind load of some Base Station Antennas is higher than previously specified on earlier data sheets.

During 2009 Kathrein has migrated to calculating and specifying all wind loads in accordance with DIN 1055-4 (similar to the European Standard EN 1991-1-4) on the online data sheets. If the wind load has been calculated under the updated standard then this will be explicitly mentioned on the data sheet.

The physical dimensions of our products have not been modified unless otherwise specified, nor has the actual wind loading surface area of the antennas increased in any way.



“Quality leads the way”

As the world's oldest and largest antenna manufacturer, we live up to claim “Quality leads the way” on a daily basis. One of the fundamental principles is to always be on the lookout for the best solution for our customers.

Our quality assurance system and our environmental management system apply to the entire company and are certified by TÜV according to EN ISO 9001 and EN ISO 14001.

The catalogue is splitted into two parts.

Part 1: Antennas

Part 2: Filters, Combiners and Amplifiers

| | Pages |
|--------------------------------|-----------|
| Antennas | 7 – 221 |
| Filters, Combiners, Amplifiers | 223 – 346 |

An actual list of Kathrein's current International Representatives
can be found on our homepage

www.kathrein.de

Please contact for

Sales queries, orders, catalogues or CD-ROM:

Fax: +49 80 31 184-820

E-Mail: central.sales@kathrein.de


Technical Information:

Fax: +49 80 31 184-973


E-Mail: mobilcom@kathrein.de

List of available Catalogues for Mobile Communication Antennas and Accessories


698 – 6000 MHz Base Station Antennas, Filters, Combiners and Amplifiers for Mobile Communications




27 – 512 MHz KATHREIN-Antennas and Antenna Line Products



Professional Antennas, Filters, Combiners and Multicouplers for Ground-to-Air Communications



Antennas for Trains and Buses



The listed catalogues are also available on CD-ROM



Part 1:

Antennas for Mobile Communications

| | |
|--------------------------------------|---|
| 698 – 894 MHz 1710 – 2170 MHz | XPol XXPol Dual-band |
| 790 ... 960 MHz | XPol |
| 790 ... 960 MHz | XXPol |
| 790 ... 960 MHz 1710 ... 2170 MHz | VPol |
| 1710 ... 2690 MHz | XPol |
| 1710 ... 2690 MHz | XXPol 2-Multi-band |
| 790 ... 960 MHz 1710 ... 2690 MHz | XXPol Dual-band |
| 790 ... 960 MHz 1710 ... 2690 MHz | XXXPol |
| 790 ... 960 MHz 1710 ... 2690 MHz | XXXXPol |
| Omni | VPol |
| Indoor | VPol, VXPoI, VHPoI |
| RET | Remote Electrical Tilt-System |
| Electrical Accessories | Splitters, Tappers and Measurement Tools |
| Mechanical Accessories | Clamps, Downtilt Kits, ... |

Summary of Antenna Types, RET-Products and Accessories

The articles are listed by type number in numerical order. **New or changed product.**

| Type No. | Page | Type No. | Page | Type No. | Page | Type No. | Page |
|------------------|------|---------------|------|---------------|------|-----------------|------|
| 730... | | 736... | | 739619 | 34 | 742235v01 | 98 |
| 730376v02 | 59 | 736347 | 158 | 739620 | 34 | 742236v01 | 95 |
| 730378v02 | 60 | 736349 | 159 | | | 742237 | 94 |
| 730382 | 61 | 736350 | 155 | 741... | | 742263 | 216 |
| | | 736854 | 60 | 741573 | 173 | 742264v02 | 107 |
| | | | | 741790 | 164 | 742265v02 | 110 |
| 731... | | 737... | | 741984v01 | 82 | 742266v02 | 115 |
| 731651 | 207 | 737398 | 218 | 741988v01 | 82 | 742270v03 | 129 |
| | | 737971 | 209 | 741989v01 | 83 | 742271v03 | 132 |
| | | 737972 | 209 | 741990v01 | 83 | 742272v03 | 136 |
| 732... | | 737973 | 209 | | | 742290 | 63 |
| 732317 | 208 | 737974 | 209 | 742... | | 742317 | 216 |
| 732318 | 208 | 737975 | 209 | 742033 | 212 | 742351v01 | 66 |
| 732321 | 208 | 737977 | 209 | 742034 | 212 | 742352v01 | 101 |
| 732322 | 208 | 737978 | 209 | 742113 | 214 | | |
| 732327 | 208 | | | 742192v01 | 58 | 800100.. | |
| | | 738... | | 742196v01 | 69 | 80010046 | 63 |
| | | 738187 | 163 | 742210v01 | 68 | | |
| 734... | | 738192 | 157 | 742213v01 | 77 | 800101.. | |
| 734360 | 216 | 738440 | 220 | 742214v01 | 73 | 80010111 | 162 |
| 734361 | 216 | 738445 | 57 | 742215v01 | 74 | 80010121v01 | 120 |
| 734362 | 216 | 738446 | 57 | 742218v01 | 67 | 80010122v01 | 121 |
| 734363 | 216 | 738449 | 176 | 742219v01 | 67 | 80010123v03 | 122 |
| 734364 | 216 | 738450 | 152 | 742222v01 | 106 | 80010147 | 178 |
| 734365 | 216 | 738546 | 207 | 742223v02 | 108 | | |
| | | 738908 | 217 | 742224v02 | 113 | 800102.. | |
| | | | | 742225v02 | 119 | 80010202v02 | 35 |
| 735... | | 739... | | 742226v01 | 105 | 80010203v02 | 36 |
| 735727 | 56 | 739489v01 | 68 | 742233v01 | 92 | 80010204v02 | 38 |

Summary of Antenna Types, RET-Products and Accessories

The articles are listed by type number in numerical order. **New or changed product.**

| Type No. | Page | Type No. | Page | Type No. | Page | Type No. | Page |
|--------------------|------|--------------------|------|-----------------|------|--------------------|------|
| 80010207v01 | 35 | 80010426v01 | 72 | 80010622 | 96 | 80010698 | 127 |
| 80010208v01 | 39 | 80010428v01 | 73 | 80010634v01 | 37 | 80010699 | 128 |
| 80010215v01 | 39 | 80010430 | 174 | 80010636 | 79 | | |
| 80010217v01 | 42 | 80010431 | 177 | 80010642 | 32 | | |
| 80010247v01 | 70 | 80010439v01 | 81 | 80010643 | 32 | 800107.. | |
| 80010249 | 172 | 80010442 | 165 | 80010644 | 95 | 80010709 | 175 |
| 80010251v01 | 66 | 80010454v01 | 104 | 80010647v01 | 50 | 80010721v01 | 26 |
| 80010274 | 161 | 80010456v02 | 33 | 80010651 | 80 | 80010722v01 | 27 |
| 80010290v01 | 131 | 80010465 | 168 | 80010652 | 99 | 80010723v01 | 28 |
| 80010291v02 | 134 | 80010485v01 | 112 | 80010664 | 109 | 80010734v01 | 20 |
| 80010292v03 | 138 | 80010486v01 | 118 | 80010665 | 114 | 80010735v01 | 21 |
| 80010294v02 | 37 | 80010492v01 | 139 | 80010666 | 117 | 80010736v01 | 22 |
| | | | | 80010667 | 46 | 80010744 | 94 |
| 800103.. | | | | 80010668 | 47 | 80010747 | 160 |
| 80010300v01 | 43 | 800105.. | | 80010669 | 48 | 80010748 | 170 |
| 80010303v02 | 36 | 80010504v01 | 75 | 80010670v01 | 130 | 80010749 | 171 |
| 80010305v02 | 38 | 80010505v01 | 78 | 80010671v01 | 133 | 80010761 | 69 |
| 80010306v02 | 40 | 80010510v01 | 97 | 80010672v01 | 137 | 80010764v01 | 23 |
| 80010307v01 | 40 | 80010511v01 | 100 | 80010674 | 140 | 80010765v01 | 24 |
| 80010308v01 | 41 | 80010516v01 | 49 | 80010675 | 141 | 80010766v01 | 25 |
| 80010309v01 | 41 | 80010517v01 | 51 | 80010676 | 142 | 80010771 | 111 |
| 80010310v01 | 42 | | | 80010677 | 169 | 80010772 | 116 |
| 80010360 | 88 | | | 80010681 | 71 | | |
| 80010368 | 62 | 800106.. | | 80010682 | 93 | | |
| 80010375 | 87 | 80010605 | 84 | 80010685 | 149 | 800108.. | |
| 80010378 | 81 | 80010606v01 | 85 | 80010686 | 150 | 80010805 | 148 |
| | | 80010614v01 | 74 | 80010691 | 143 | 80010816 | 52 |
| 800104.. | | 80010618v01 | 86 | 80010692 | 135 | 80010817 | 53 |
| 80010425V01 | 72 | 80010621v01 | 76 | 80010697 | 126 | 80010825 | 146 |

Summary of Antenna Types, RET-Products and Accessories


The articles are listed by type number in numerical order. **New or changed product.**

| Type No. | Page | Type No. | Page | Type No. | Page | Type No. | Page |
|-----------------|------|----------|------|-----------------|------|----------|------|
| 80010826 | 147 | 86010012 | 185 | 86010149 | 29 | | |
| 80010850 | 156 | 86010013 | 185 | 86010150 | 194 | | |
| | | 86010014 | 185 | 86010151 | 194 | | |
| | | 86010015 | 185 | 86010152 | 194 | | |
| 850... | | 86010017 | 191 | | | | |
| 85010002 | 207 | 86010018 | 191 | | | | |
| 85010003 | 207 | 86010019 | 191 | K61... | | | |
| 85010005 | 221 | 86010023 | 195 | K61335 | 219 | | |
| 85010006 | 215 | 86010026 | 183 | | | | |
| 85010008 | 210 | 86010029 | 185 | | | | |
| 85010010 | 89 | 86010030 | 187 | K63... | | | |
| 85010014 | 211 | 86010031 | 188 | K63236001 | 195 | | |
| 85010015 | 211 | 86010032 | 185 | | | | |
| 85010016 | 211 | 86010033 | 185 | | | | |
| 85010017 | 211 | 86010046 | 184 | K75... | | | |
| 85010058 | 212 | 86010054 | 185 | K751161 | 153 | | |
| 85010059 | 212 | 86010100 | 192 | K7515641 | 154 | | |
| 85010060 | 213 | 86010101 | 192 | | | | |
| 85010061 | 213 | 86010102 | 192 | | | | |
| | | 86010103 | 192 | | | | |
| | | 86010104 | 192 | | | | |
| 860... | | 86010105 | 192 | | | | |
| 86010002 | 186 | 86010130 | 190 | | | | |
| 86010006 | 183 | 86010131 | 190 | | | | |
| 86010007 | 185 | 86010136 | 193 | | | | |
| 86010008 | 185 | 86010137 | 193 | | | | |
| 86010009 | 185 | 86010138 | 193 | | | | |
| 86010010 | 185 | 86010147 | 182 | | | | |
| 86010011 | 185 | 86010148 | 182 | | | | |

| Removed from the 2012 catalogue | Status |
|--|---|
| 698–894 MHz XPol / 1710–2170 MHz XXPoI | |
| 80010734 iRCU AISG 1.1 | 80010734v01 iRCU AISG 2.0 |
| 80010735 iRCU AISG 1.1 | 80010735v01 iRCU AISG 2.0 |
| 80010736 iRCU AISG 1.1 | 80010736v01 iRCU AISG 2.0 |
| 698–894 MHz XPol | |
| 80010764 iRCU AISG 1.1 | 80010764v01 iRCU AISG 2.0 |
| 80010765 iRCU AISG 1.1 | 80010765v01 iRCU AISG 2.0 |
| 80010766 iRCU AISG 1.1 | 80010766v01 iRCU AISG 2.0 |
| 790...960 MHz XPol | |
| 80010141 | Replaced by 80010642 |
| 80010214v01 | Available on request until end of 2012 |
| 80010218v01 | Available on request until end of 2012 |
| 80010518v01 | Available on request till end of 2012 / replaced by 80010817 |
| 790...960 MHz VPol / 1710...2170 MHz VPol | |
| 80010658 | Phased out |
| 730677 | Available on request until end of 2012 |
| 730368 | Available on request until end of 2012 |
| 730691 | Available on request until end of 2012 |
| 730376v01 | 730376v02 |
| 730378v01 | 730378v02 |
| 1710...2690 MHz XPol | |
| 741623 | Available on request until end of 2012 |
| 742186v01 | Available on request until end of 2012 |
| 739710 | Available on request until end of 2012 |
| 80010314 | Available on request until end of 2012 |
| 790...960 MHz / 1710...2690 MHz XXPoI Dual-band | |
| 741327 | Available on request until end of 2012 |
| 741322 | Available on request until end of 2012 |
| 742047v01 | Available on request until end of 2012 |
| 790...960 MHz / 1710...2690 MHz XXXPoI | |
| 80010292v02 | 80010292v03 |
| 80010670v01 | Available on request until end of 2012 |
| 80010671v01 | Available on request until end of 2012 |
| 80010672v01 | Available on request until end of 2012 |
| Indoor VPol | |
| 80010433 | Available on request until end of 2012 |
| 736854 | Available on request until end of 2012 |
| RET | |
| 86010140 | |
| 86010141 | |
| 86010145 | iRCU – Replaced by 86010149 |

Please note, new type numbers in the catalogue 2012 are shown and coloured in the respective register of the different antenna families.

Antenna Designs:
Antenna Families
Harmony of Design and Technology

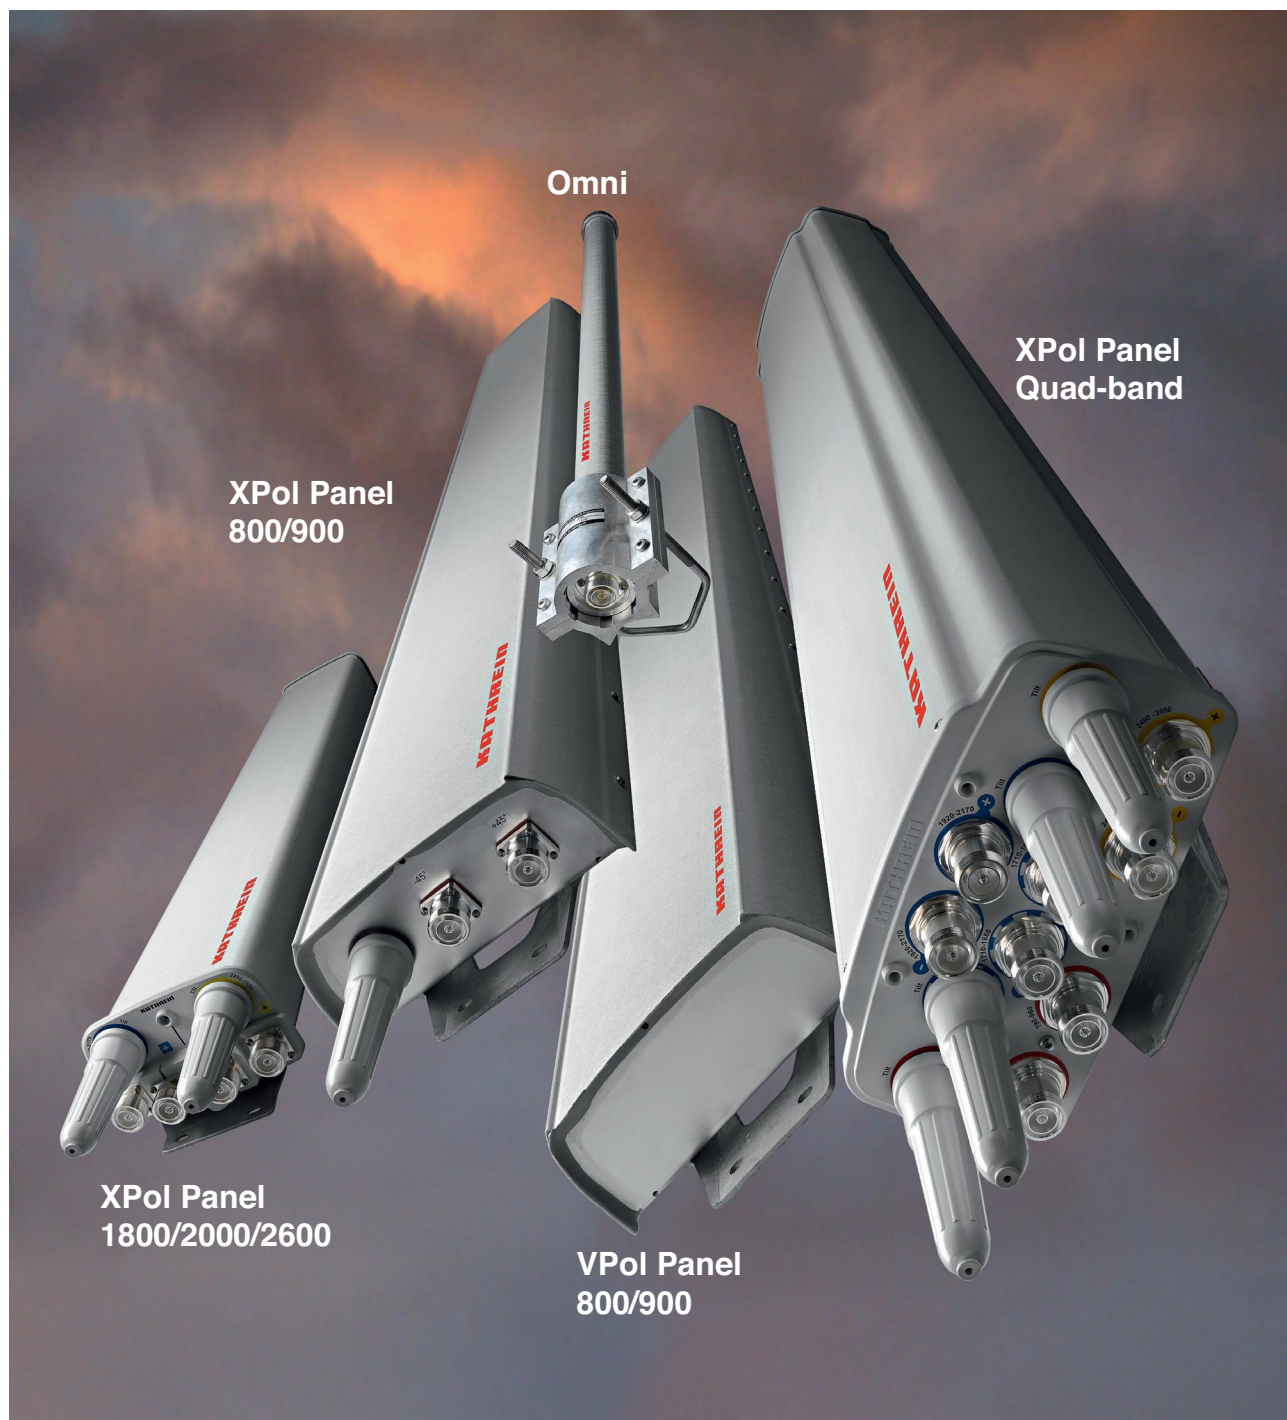


Directional Antenna Designs: Special Directional Antennas For Particular Applications

Antennas for

- tunnel use
- railway use
- micro cells (street use)
- high gain link for repeaters

The distinguishing features of these special versions, e.g. parabolic panels or log. periodic antennas, are:

- very small half-power beam width (high gain)
- high sidelobe suppression
- also Dual-band and Multi-band versions
- bidirectional horizontal pattern.

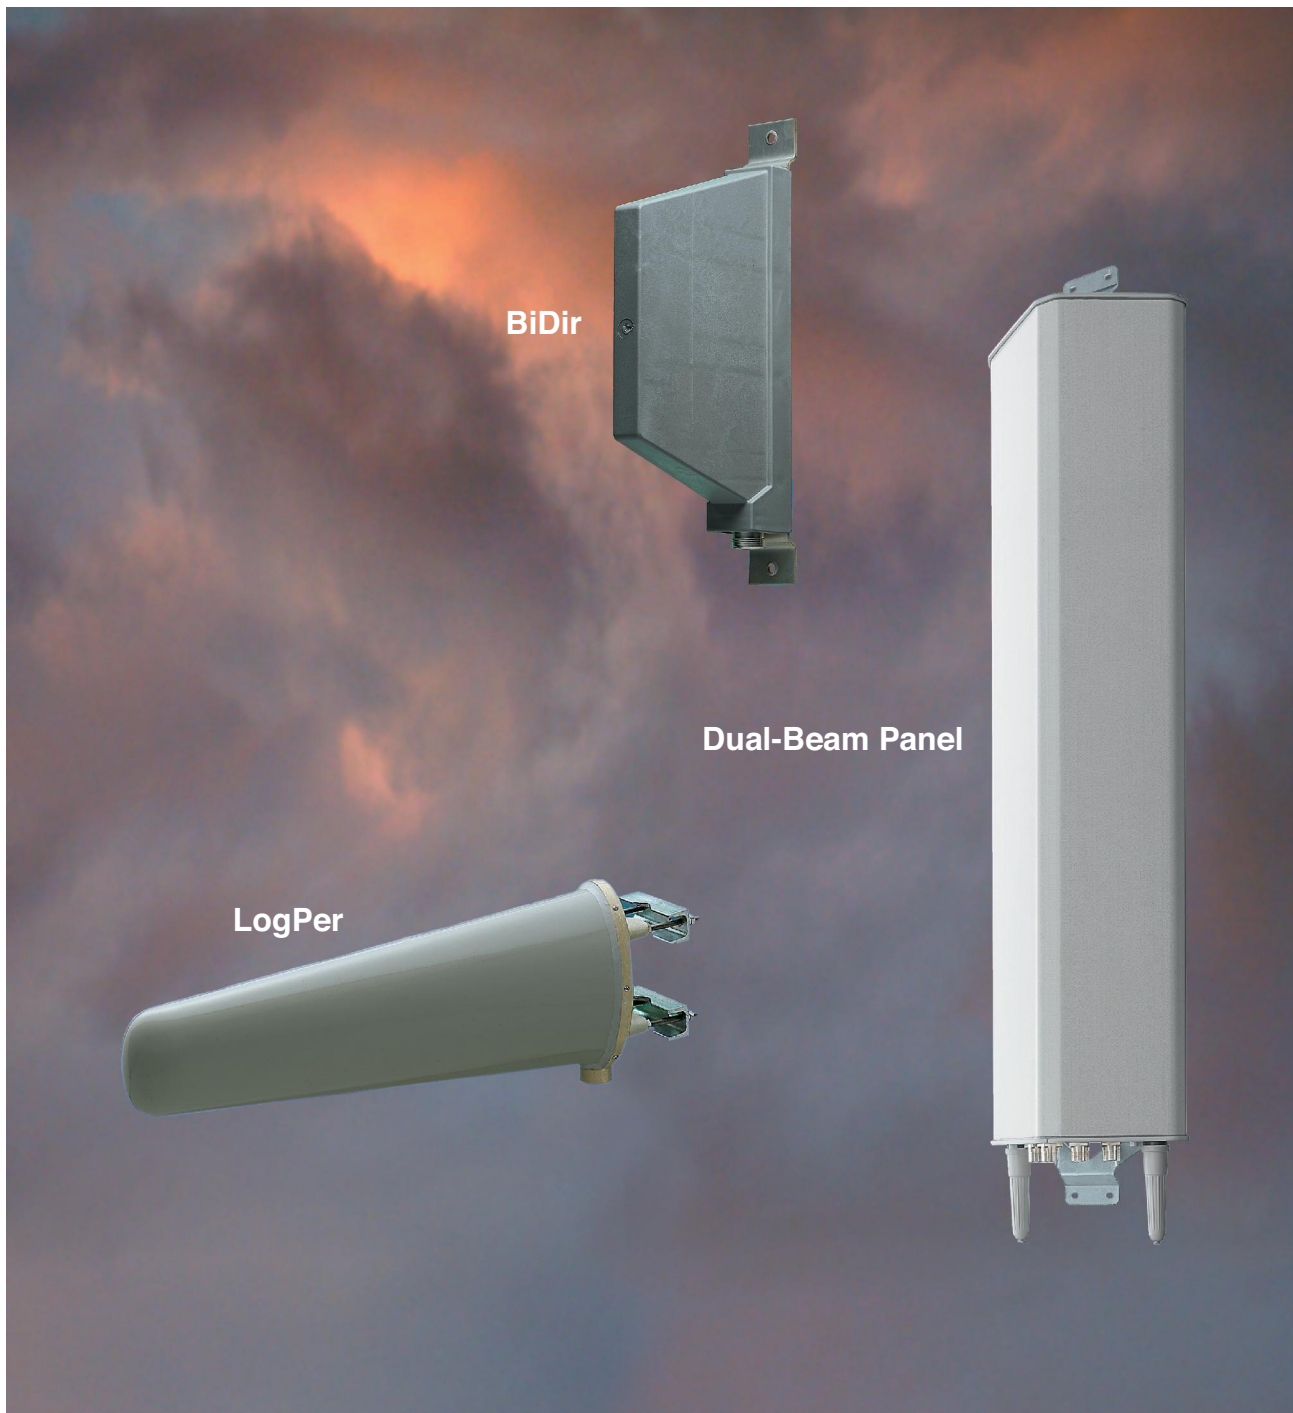



Faini Telecommunication Systems is an Italian Company originated in 1995 as an outsource, with the name of Faini Antenne s.r.l., of the Antenna Division of the former Siemens Telecomunicazioni.

Since March 2007 Faini Telecommunication Systems is a member of the worldwide known German Kathrein Group.

The Company is located in Milano area nearby the major microwave and mobile network system Radio manufacturers and is specialized in the design and fabrication of a full range of Antennas for Point to Point (PTP) and Point to Multi Point Radio Links as well as for special custom oriented applications.

In-house capabilities offer design services for special versions of antennas to be integrated to the Customer Radio Equipment according to their needs.


For further information, please contact:

Faini Telecommunication Systems S.r.l.

Via Firenze, 11
20063 Cernusco s/n (MI) – Italy

Tel. +39 02 929042.1
Fax.+39 02 929042.219

<http://fainitelecommunication.com>
info@fainitelecommunication.com

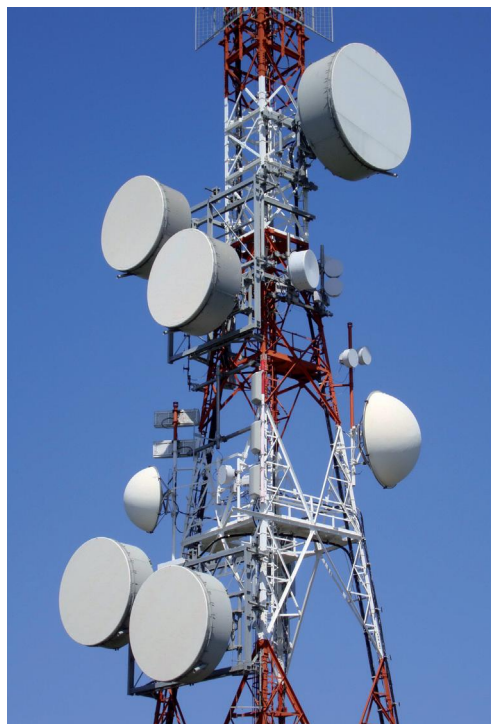

Microwave Antennas and Couplers

Antenna Designs:

Antenna Families / RET-system

Distinguishing features

| | |
|---|---|
| Design | Compact size and elegant design are the distinguishing features of Kathrein's antenna families. |
| Radome | The radomes cover the internal antenna components. The fiberglass material guarantees optimum performance with regards to stability, strength, UV resistance, painting and weather protection. |
| Environmental influences | Kathrein antenna designs are based on fundamental engineering knowledge and also on our decades of practical experience, during which the various constructions and materials used have proved their outstanding reliability. |
| Environmental conditions | Kathrein cellular antennas are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E. The antennas exceed this standard with regards to the following items: – Low temperature: –55 °C – High temperature (dry): +60 °C |
| Impedance | Standard Impedance for all products is 50 Ω unless otherwise stated. |
| Great variety of half-power beam width, gain values, electrical downtilt | According to the antenna type selected, customer can choose from different half-power beam widths. Gain values up to 22.5 dBi and electrical downtilts up to 15° for panel antennas are available. Downtilts are either fixed or adjustable or even controlled by remote electrical tilt system (RET). |
| Low intermodulation products (typically –150 dBc) | After many years of experience in the construction of antennas and after intensive research into the effects of intermodulation, we have been able to optimize the material and technology used for antennas (the given value refers to 3rd order products measured with 2 carriers of 20 W each). |
| Excellent tracking | Tracking states the symmetry between the +45° and –45° polarized horizontal pattern. Bad tracking values lead to interferences in the network and reduced diversity performance. Kathreins special Tracking compensation reduces the average value measured at ±60° to < 2 dB. |
| Superior squint | Squint, also often referred to as "Pattern Symmetry", gives the symmetry of the pattern over the whole frequency range measured at the 3 dB points. Interferences and nulls in the network may be the result of bad values. In contrast to the vertical squint which is usually good, excellent squint values of the horizontal pattern are hard to reach. Kathreins superior values of ± 5 % of the half-power beam width are in line with the requirements from system suppliers. |
| Multi-band design | Depending on antenna family broad-band, multi-band, dual-band and triple-band versions can be offered. Therefore the variety of antennas used can be kept to a minimum. |
| Excellent grounding | The antennas are DC grounded according EN 50083-1. |
| Multi-functional installation hardware | Depending on the type, the antennas are equipped with up to 2 attachment points. Panels can be wall-mounted without any additional hardware. For mast-mounting, brackets and mechanical downtilt kits are available. To assist the installation technicians in aligning the panels, an azimuth adjustment tool can be supplied (see Mechanical Accessories). |
| MTBF Statement | Traditionally passive components like antennas cannot be well calculated due to the lack of a sufficient number of components in the MTBF library. Unfortunately this constraint results in a very inaccurate calculation. Thus such results are technically questionable and unrealistic. In essence, antennas are made out of mechanical parts that do not show any failure rates. Only available failure rates can be calculated into an MTBF value. Consequently such components cannot be listed in any MTBF library. |
| Remote Electrical Tilt System AISG Compliancy | Kathrein hereby states that RET devices, as far as the functionality and features are described within the AISG / 3 GPP standard, are compliant with the standard. |


Downtilting of Antennas: Downtilt Possibilities

Mechanical downtilt


For further technical information please see “Mechanical Accessories”, page 205.

Electrical downtilt

Description of the adjustment mechanism (protective cap removed):

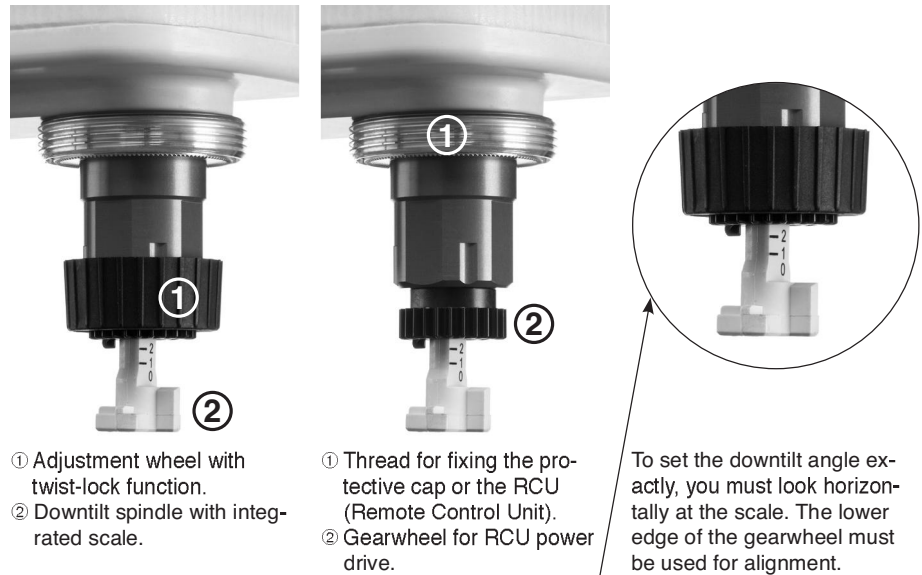


Manual adjustment procedure:

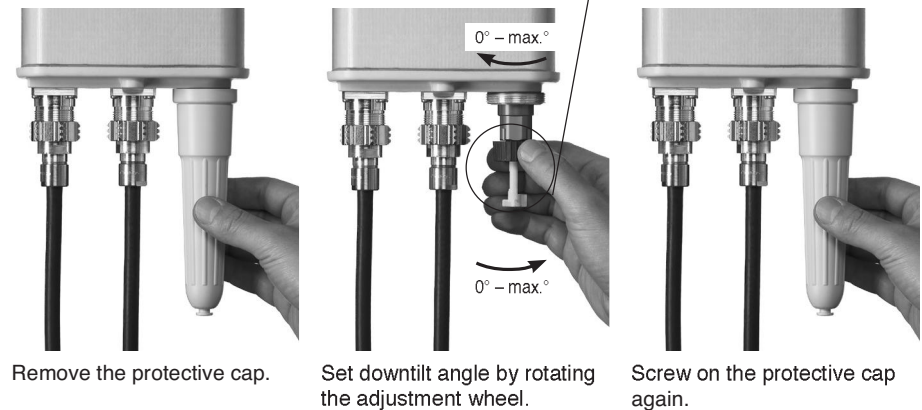

Remote Electrical Tilt (RET) For further technical information please see “RET”, pages 180 and 181.

Description of bottom end cap (exemplary picture):

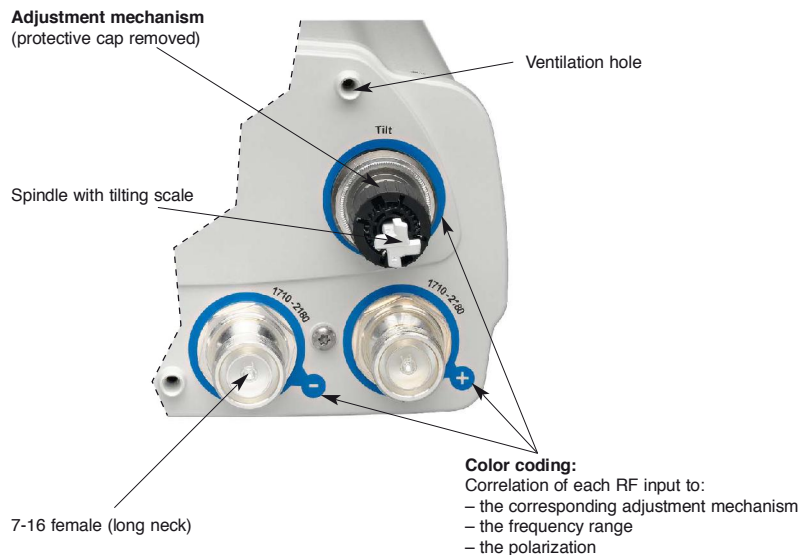

XXPol Panel 870–960/1710–1880 C 65°/60° 17/18dBi 2°–8°T/2°T

Polarization(s):
(X) Dual +45°/-45°
(V) Vertical

Antenna Family

Frequency Range(s)







Integrated Combiner

Horizontal
Half-power Beam Width(s)







Gain Value(s)

Variable / Fixed Electrical Tilt(s)

Horizontal Patterns:

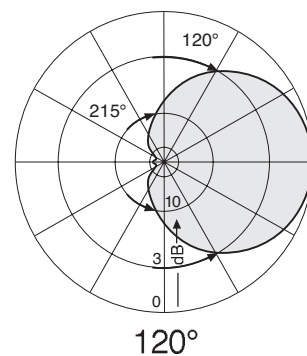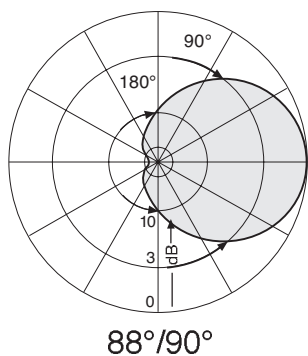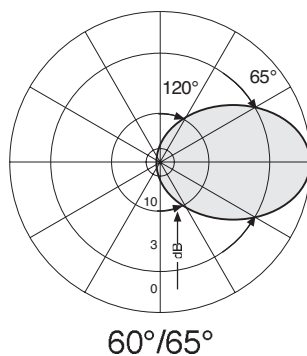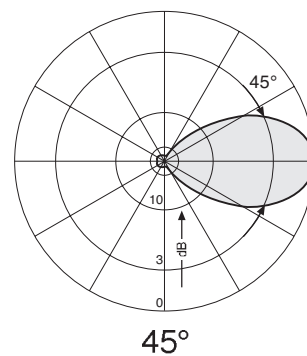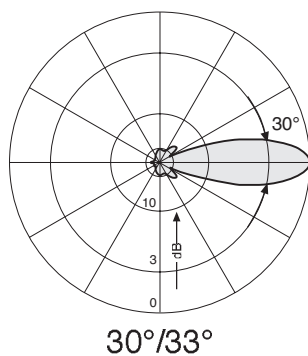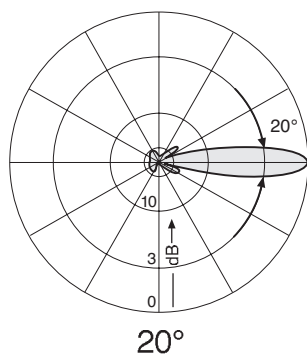

Vertical Patterns:

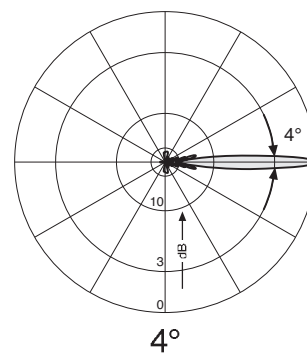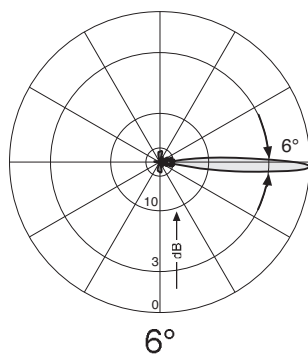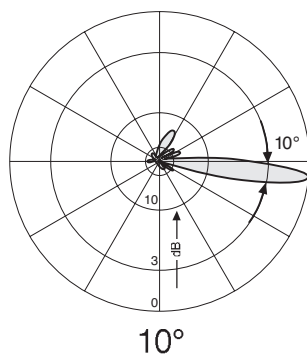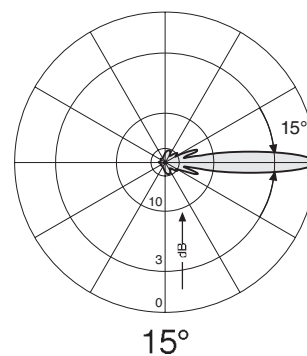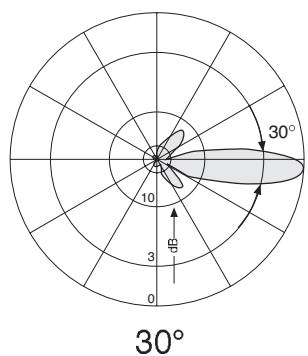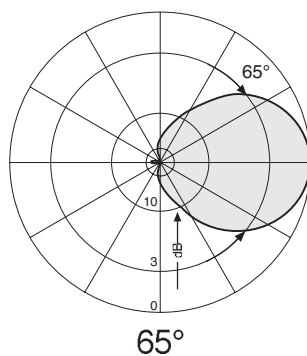

Summary – Directional Antennas

Dual Polarization +45°/–45°

700/800 / 700/1800–2000

XPol – 700/800

| Type | Type No. | Height [mm] | Connector position | Page |
|---|--------------------|-------------|--------------------|------|
| XPol Panel iRCU 698–894 65° 15dBi 0°–16°T | 80010734v01 | 1355 | bottom | 20 |
| XPol Panel iRCU 698–894 65° 16dBi 0°–10°T | 80010735v01 | 1934 | bottom | 21 |
| XPol Panel iRCU 698–894 65° 17dBi 0°–10°T | 80010736v01 | 2438 | bottom | 22 |

XXPol – 700/1800–2000

| | | | | |
|--|--------------------|------|--------|----|
| XXPol Panel iRCU 698–894 65° 15dBi 0°–16°T | 80010764v01 | 1403 | bottom | 23 |
| 1710–2170 65° 17.5dBi 0°–10°T | | | | |
| XXPol Panel iRCU 698–894 65° 16dBi 0°–10°T | 80010765v01 | 1918 | bottom | 24 |
| 1710–2170 65° 18.5dBi 0°–10°T | | | | |
| XXPol Panel iRCU 698–894 65° 17dBi 0°–10°T | 80010766v01 | 2438 | bottom | 25 |
| 1710–2170 65° 18.5dBi 0°–10°T | | | | |
| XXPol Panel iRCU 698–894 85° 14dBi 0°–16°T | 80010721v01 | 1394 | bottom | 26 |
| 1710–2170 85° 16.5dBi 0°–10°T | | | | |
| XXPol Panel iRCU 698–894 85° 15dBi 0°–10°T | 80010722v01 | 1828 | bottom | 27 |
| 1710–2170 85° 17.5dBi 0°–10°T | | | | |
| XXPol Panel iRCU 698–894 85° 16dBi 0°–10°T | 80010723v01 | 2368 | bottom | 28 |
| 1710–2170 85° 17.5dBi 0°–10°T | | | | |

New or changed product

iRCU specifications (86010149) see page 29

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698-894

X

65°

iRCU

0°-16°

KATHREIN

Antennen · Electronic




XPol Panel iRCU 698-894 65° 15dBi 0°-16°T

| Type No. | 80010734v01 | | clamps included |
|---|---|--|---------------------|
| A) Antenna specifications | | | |
| | 698-894 | | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | |
| Polarization | +45°, -45° | +45°, -45° | |
| Gain | 12.05 dBd / 14.2 dBi | 12.65 dBd / 14.8 dBi | |
| Horizontal Pattern: | | | |
| Half-power beam width | 68° | 65° | |
| Front-to-back ratio | Copolar: > 30 dB Average: 32 dB | Copolar: > 30 dB Average: 33 dB | |
| Cross polar ratio | | | |
| Maindirection | 0° | Typically: > 24 dB | Typically: > 23 dB |
| Sector | ±60° | > 10 dB, Avg. 15 dB | > 10 dB, Avg. 16 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 16° | 14.8° | |
| Electrical tilt | 0°-16°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam: | 0° ... 8° ... 16° T 16 ... 17 ... 17 dB | 0° ... 8° ... 16° T 18 ... 17 ... 16 dB | |
| Average: | 16 ... 19 ... 20 dB | 20 ... 20 ... 20 dB | |
| Impedance | 50 Ω | | |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | | |
| Connector position | Bottom | | |
| Wind load | Frontal: 620 N (at 150 km/h) Lateral: 200 N (at 150 km/h) Rearside: 710 N (at 150 km/h) | 1550 N (at 150 mph) 500 N (at 150 mph) 1770 N (at 150 mph) | |
| Max. wind velocity | 241 km/h (150 mph) | | |
| Height/width/depth | 1355 / 303 / 99 mm (53.3 / 11.9 / 3.9 inches) | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11 kg (24 lbs) / 13 kg (27 lbs) (clamps incl.) | | |
| Packing size | 1430 x 315 x 115 mm (56.3 x 12.4 x 4.5 inches) | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | |



iRCU specifications (86010149) see page 29

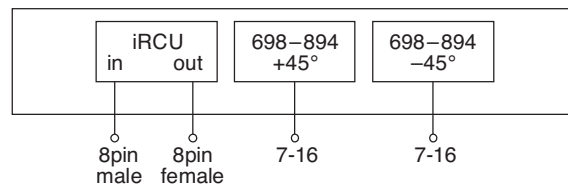

Multi-band Panel

698-894

KATHREIN

Antennen · Electronic

Dual Polarization

X

Half-power Beam Width

65°

Integrated replaceable Remote Control Unit

iRCU

Adjustable Electrical Downtilt

0°-10°




XPol Panel iRCU 698-894 65° 16dBi 0°-10°

| Type No. | 80010735v01 | | clamps included |
|---|--|--|-----------------|
| A) Antenna specifications | | | |
| | 698-894 | | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | |
| Polarization | +45°, -45° | +45°, -45° | |
| Gain | 13.35 dBi / 15.5 dBi | 13.85 dBi / 16 dBi | |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 65° | |
| Front-to-back ratio | Copolar: > 30 dB Average: 35 dB | Copolar: > 30 dB Average: 35 dB | |
| Cross polar ratio | | | |
| Main direction | 0° | 0° | |
| Sector | ±60° | ±60° | |
| | Typically: > 25 dB > 11 dB, Avg. 15 dB | Typically: > 25 dB > 11 dB, Avg. 15 dB | |
| Vertical Pattern: | | | |
| Half-power beam width | 11.3° | 10° | |
| Electrical tilt | 0°-10°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam: | 0° ... 5° ... 10° T | 0° ... 5° ... 10° T | |
| Average: | 16 ... 17 ... 17 dB | 18 ... 17 ... 16 dB | |
| | 16 ... 19 ... 20 dB | 20 ... 20 ... 20 dB | |
| Impedance | 50 Ω | | |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | | |
| Connector position | Bottom | | |
| Wind load | Frontal: 900 N (at 150 km/h) Lateral: 310 N (at 150 km/h) Rearside: 1030 N (at 150 km/h) | 2260 N (at 150 mph) 760 N (at 150 mph) 2580 N (at 150 mph) | |
| Max. wind velocity | 241 km/h (150 mph) | | |
| Height/width/depth | 1934 / 303 / 99 mm (76.1 / 11.9 / 3.9 inches) | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 13 kg (28.7 lbs) / 15 kg (33 lbs) (clamps incl.) | | |
| Packing size | 2060 x 315 x 115 mm (81.1 x 12.4 x 4.5 inches) | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | |



iRCU specifications (86010149) see page 29

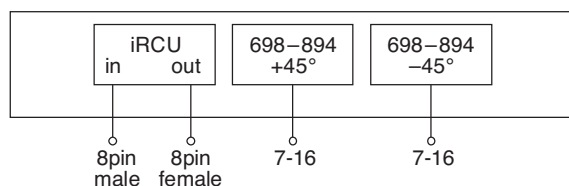

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

X

65°

iRCU

0°–10°

KATHREIN

Antennen · Electronic




XPol Panel iRCU 698–894 65° 17dBi 0°–10°T

| Type No. | 80010736v01 | |
|---|--|---|
| clamps included | | |
| A) Antenna specifications | | |
| Frequency range | 698–894 | |
| | 698 – 806 MHz | 824 – 894 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Gain | 14.25 dBd / 16.4 dBi | 14.85 dBd / 17 dBi |
| Horizontal Pattern: | | |
| Half-power beam width | 67° | 68° |
| Front-to-back ratio | Copolar: > 30 dB Average: 35 dB | Copolar: > 30 dB Average: 35 dB |
| Cross polar ratio | | |
| Maindirection | 0° | Typically: > 20 dB |
| Sector | ±60° | > 11 dB, Avg. 15 dB |
| Vertical Pattern: | | |
| Half-power beam width | 9.5° | 8.6° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | |
| Min. sidelobe suppression for first sidelobe above main beam: | 0.5° ... 5° ... 9.5° T | 0.5° ... 5° ... 9.5° T |
| Average: | 16 ... 16 ... 16 dB | 18 ... 18 ... 17 dB |
| | 18 ... 18 ... 17 dB | 20 ... 20 ... 20 dB |
| Impedance | 50 Ω | |
| VSWR | < 1.5 | |
| Isolation, between ports | > 30 dB | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | |
| Input | 2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | |
| Connector position | Bottom | |
| Wind load | Frontal: 1160 N (at 150 km/h) 2900 N (at 150 mph) | Lateral: 390 N (at 150 km/h) 970 N (at 150 mph) |
| | Rearside: 1380 N (at 150 km/h) | 3450 N (at 150 mph) |
| Max. wind velocity | 241 km/h (150 mph) | |
| Height/width/depth | 2438 / 303 / 99 mm (96 / 11.9 / 3.9 inches) | |
| Category of mounting hardware | H (Heavy) | |
| Weight | 16.7 kg (36.8 lbs) / 18.5 kg (40.8 lbs) (clamps incl.) | |
| Packing size | 2600 x 315 x 115 mm (102.4 x 12.4 x 4.5 inches) | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | |



iRCU specifications (86010149) see page 29

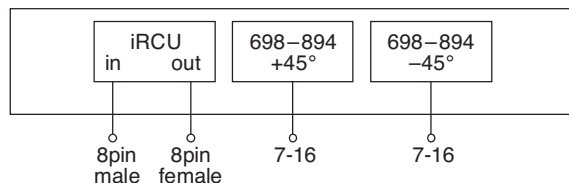

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

| | |
|----------------|------------------|
| 698-894 | 1710-2170 |
| X | X |
| 65° | 65° |
| iRCU | iRCU |
| 0°-16° | 0°-10° |

KATHREIN

Antennen · Electronic




A GLOBAL INITIATIVE



XXPol Panel iRCU 698-894/1710-2170 65°/65° 15/17.5dBi 0°-16°/0°-10°T

| | | | | | |
|--|---|---|---|---|-----------------|
| Type No. | 80010764v01 | | | | clamps included |
| A) Antenna specifications | | | | | |
| | 698-894 | | 1710-2170 | | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | 1710 – 1755 MHz 2110 – 2170 MHz | 1850 – 1990 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain | 12.15 dBi / 14.3 dBi | 12.65 dBi / 14.8 dBi | 17.3 dBi | 17.5 dBi | |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 61° | 60° | |
| Front-to-back ratio | Copolar: > 30 dB Average: 32 dB | Copolar: > 27 dB Average: 30 dB | Copolar: > 30 dB Average: 34 dB | Copolar: > 30 dB Average: 34 dB | |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: > 25 dB > 10 dB, Avg. 15 dB | Typically: > 25 dB > 8 dB, Avg. 14 dB | Typically: > 25 dB > 8 dB, Avg. 14 dB | Typically: > 25 dB > 10 dB, Avg. 16 dB | |
| Tracking, Avg. | 1.5 dB | 1.5 dB | 2.0 dB | 1.0 dB | |
| Squint | ±2.5° | ±4.0° | ±4.0° | ±1.5° | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 15° | 13.5° | 7.5° | 7.5° | |
| Electrical tilt | 0°-16°, continuously adjustable | | 0°-10°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 8° ... 16° T 17 ... 16 ... 16 dB 19 ... 19 ... 18 dB | 0° ... 8° ... 16° T 18 ... 16 ... 16 dB 22 ... 20 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 17 dB 20 ... 20 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 17 dB 20 ... 20 ... 20 dB | |
| Impedance | 50 Ω | | | | |
| VSWR | < 1.5 | | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | | | | |
| Connector position | Bottom | | | | |
| Wind load | Frontal: 690 N (at 150 km/h) Lateral: 260 N (at 150 km/h) Rearside: 710 N (at 150 km/h) | | 1710 N (at 150 mph) 640 N (at 150 mph) 1770 N (at 150 mph) | | |
| Max. wind velocity | 241 km/h (150 mph) | | | | |
| Height/width/depth | 1403 / 300 / 152 mm (55.2 / 11.8 / 6 inches) | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 18.5 kg (40.8 lbs) / 20.5 kg (45.2 lbs) (clamps incl.) | | | | |
| Packing size | 1646 x 322 x 190 mm (64.8 x 12.7 x 7.5 inches) | | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | | |

iRCU specifications (86010149) see page 29

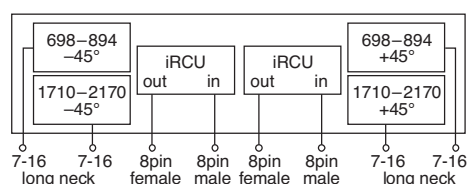

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

KATHREIN

Antennen · Electronic

X

X

65°

65°

iRCU

iRCU

0°–10°

0°–10°




XXPol Panel iRCU 698–894/1710–2170 65°/65° 16/18.5dBi 0°–10°/0°–10°T

| Type No. | 80010765v01 | | | |
|--|--|---|---|---|
| clamps included | | | | |
| A) Antenna specifications | | | | |
| | 698–894 | | 1710–2170 | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | 1710 – 1755 MHz 2110 – 2170 MHz | 1850 – 1990 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 13.15 dBi / 15.3 dBi | 13.65 dBi / 15.8 dBi | 18 dBi | 18.5 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 65° | 63° | 62° |
| Front-to-back ratio | Copolar: > 30 dB Average: 34 dB | Copolar: > 30 dB Average: 34 dB | Copolar: > 27 dB Average: 34 dB | Copolar: > 27 dB Average: 34 dB |
| Cross polar ratio Main direction Sector | 0° ±60° Typically: > 25 dB > 10 dB, Avg. 16 dB | Typically: > 20 dB > 10 dB, Avg. 14 dB | Typically: > 25 dB > 8 dB, Avg. 15 dB | Typically: > 30 dB > 10 dB, Avg. 15 dB |
| Tracking, Avg. | 1.0 dB | 1.5 dB | 1.5 dB | 1.0 dB |
| Squint | ±2.5° | ±3.0° | ±3.0° | ±2.5° |
| Vertical Pattern: | | | | |
| Half-power beam width | 11.8° | 10.8° | 5.8° | 5.8° |
| Electrical tilt | 0°–10°, continuously adjustable | | 0°–10°, continuously adjustable | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 5° ... 10° T 16 ... 16 ... 18 dB 18 ... 20 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB 20 ... 22 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB |
| Impedance | 50 Ω | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female | | | |
| Connector position | Bottom | | | |
| Wind load | Frontal: | 950 N (at 150 km/h) | 2380 N (at 150 mph) | |
| | Lateral: | 360 N (at 150 km/h) | 890 N (at 150 mph) | |
| | Rearside: | 980 N (at 150 km/h) | 2460 N (at 150 mph) | |
| Max. wind velocity | 241 km/h (150 mph) | | | |
| Height/width/depth | 1918 / 300 / 152 mm (75.5 / 11.8 / 6.0 inches) | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 23.5 kg (51.8 lbs) / 25.5 kg (56.2 lbs) (clamps incl.) | | | |
| Packing size | 2166 x 322 x 190 mm (85.3 x 12.7 x 7.5 inches) | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | |



iRCU specifications (86010149) see page 29

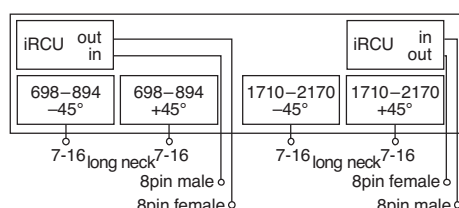

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt


| | | |
|----------------|------------------|--|
| 698–894 | 1710–2170 | KATHREIN Antennen · Electronic |
| X | X | |
| 65° | 65° | |
| iRCU | iRCU | |
| 0°–10° | 0°–10° | |



XXPol Panel iRCU 698–894/1710–2170 65°/65° 17/18.5dBi 0°–10°/0°–10°T

| | | | | | |
|--|---|---|---|---|-----------------|
| Type No. | 80010766v01 | | | | clamps included |
| A) Antenna specifications | | | | | |
| | 698–894 | | 1710–2170 | | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | 1710 – 1755 MHz 2110 – 2170 MHz | 1850 – 1990 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 14.25 dBi / 16.4 dBi | 14.65 dBi / 16.8 dBi | 18 dBi | 18.5 dBi | |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 63° | 62° | |
| Front-to-back ratio | Copolar: > 30 dB Average: 34 dB | Copolar: > 30 dB Average: 34 dB | Copolar: > 27 dB Average: 34 dB | Copolar: > 27 dB Average: 34 dB | |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: > 25 dB > 10 dB, Avg. 15 dB | Typically: > 20 dB > 10 dB, Avg. 12 dB | Typically: > 25 dB > 8 dB, Avg. 15 dB | Typically: > 30 dB > 10 dB, Avg. 15 dB | |
| Tracking, Avg. | 1.0 dB | | 1.5 dB | | |
| Squint | ±2.5° | | ±3.0° | | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 9.5° | 8.7° | 5.8° | 5.8° | |
| Electrical tilt | 0°–10°, continuously adjustable | | 0°–10°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 5° ... 10° T 16 ... 16 ... 16 dB 18 ... 20 ... 18 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB 20 ... 20 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB | |
| Impedance | 50 Ω | | | | |
| VSWR | < 1.5 | | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | | | | |
| Connector position | Bottom | | | | |
| Wind load | Frontal: 1270 N (at 150 km/h) Lateral: 470 N (at 150 km/h) Rearside: 1320 N (at 150 km/h) | | 3170 N (at 150 mph) 1160 N (at 150 mph) 3310 N (at 150 mph) | | |
| Max. wind velocity | 241 km/h (150 mph) | | | | |
| Height/width/depth | 2438 / 300 / 152 mm (96 / 11.8 / 6.0 inches) | | | | |
| Category of mounting hardware | H (Heavy) | | | | |
| Weight | 26.5 kg (58.3 lbs) / 28.5 kg (62.7 lbs) (clamps incl.) | | | | |
| Packing size | 2656 x 320 x 190 mm (99.88 x 12.6 x 7.5 inches) | | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | | |

iRCU specifications (86010149) see page 29

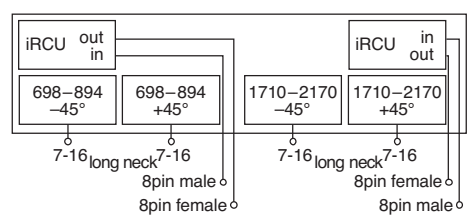

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698-894 1710-2170

X X

85° 85°

iRCU iRCU

0°-16° 0°-10°

KATHREIN

Antennen · Electronic




XXPol Panel iRCU 698-894/1710-2170 85°/85° 14/16.5dBi 0°-16°/0°-10°T

| Type No. | 80010721 v01 | | | |
|--|--|---|---|---|
| clamps included | | | | |
| A) Antenna specifications | | | | |
| | 698-894 | | 1710-2170 | |
| Frequency range | 698 - 806 MHz | 824 - 894 MHz | 1710 - 1755 MHz 2110 - 2170 MHz | 1850 - 1990 MHz |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° |
| Gain | 11.35 dBd / 13.5 dBi | 11.85 dBd / 14 dBi | 16.5 dBi | 16.5 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 85° | 85° | 88° | 85° |
| Front-to-back ratio | Copolar: > 25 dB Average: 32 dB | Copolar: > 25 dB Average: 28 dB | Copolar: > 25 dB Average: 26 dB | Copolar: > 25 dB Average: 27 dB |
| Cross polar ratio Main direction Sector | 0° ±60° Typically: > 20 dB > 10 dB, Avg. 14 dB | Typically: > 22 dB > 10 dB, Avg. 15 dB | Typically: > 15 dB > 10 dB, Avg. 12 dB | Typically: > 15 dB > 8 dB, Avg. 12 dB |
| Tracking, Avg. | 1.5 dB | | 0.5 dB | |
| Squint | ±4.5° | | ±4.0° | |
| Vertical Pattern: | | | | |
| Half-power beam width | 16.5° | 15.1° | 6.7° | 6.7° |
| Electrical tilt | 0°-16°, continuously adjustable | | 0°-10°, continuously adjustable | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 8° ... 16° T 18 ... 16 ... 18 dB 20 ... 19 ... 19 dB | 0° ... 8° ... 16° T 18 ... 18 ... 17 dB 22 ... 20 ... 20 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB 22 ... 22 ... 19 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB 22 ... 22 ... 22 dB |
| Impedance | 50 Ω | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female | | | |
| Connector position | Bottom | | | |
| Wind load | Frontal: | 670 N (at 150 km/h) | 1680 N (at 150 mph) | |
| | Lateral: | 250 N (at 150 km/h) | 610 N (at 150 mph) | |
| | Rearside: | 700 N (at 150 km/h) | 1740 N (at 150 mph) | |
| Max. wind velocity | 241 km/h (150 mph) | | | |
| Height/width/depth | 1394 / 300 / 152 mm (54.9 / 11.8 / 6.0 inches) | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 21 kg (46.2 lbs) / 23 kg (50.6 lbs) (clamps incl.) | | | |
| Packing size | 1616 x 322 x 190 mm (63.6 x 12.6 x 7.5 inches) | | | |
| Scope of supply | Panel and 2 units of clamps 42 - 115 mm diameter | | | |



iRCU specifications (86010149) see page 29

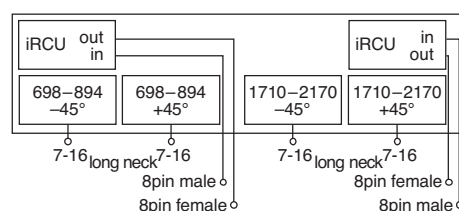

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

| | |
|----------------|------------------|
| 698-894 | 1710-2170 |
| X | X |
| 85° | 85° |
| iRCU | iRCU |
| 0°-10° | 0°-10° |

KATHREIN

Antennen · Electronic




XXPol Panel iRCU 698-894/1710-2170 85°/85° 15/17.5dBi 0°-10°/0°-10°T

| | | | | | |
|---|--|---|---|---|------------------------|
| Type No. | 80010722v01 | | | | clamps included |
| A) Antenna specifications | | | | | |
| | 698-894 | | 1710-2170 | | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | 1710 – 1755 MHz 2110 – 2170 MHz | 1850 – 1990 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain | 12.5 dBd / 14.65 dBi | 13 dBd / 15.15 dBi | 17 dBi | 17.5 dBi | |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 85° | 85° | 85° | 85° | |
| Front-to-back ratio | Copolar: > 28 dB Average: 31 dB | Copolar: > 27 dB Average: 29 dB | Copolar: > 25 dB Average: 28 dB | Copolar: > 25 dB Average: 28 dB | |
| Cross polar ratio Main direction Sector | 0° ±60° Typically: > 22 dB > 10 dB, Avg. 16 dB | Typically: > 24 dB > 10 dB, Avg. 16 dB | Typically: > 18 dB > 10 dB, Avg. 12 dB | Typically: > 18 dB > 8 dB, Avg. 12 dB | |
| Tracking, Avg. | 0.5 dB | | 0.5 dB | | |
| Squint | ±4.0° | | ±4.5° | | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 12.1° | 11° | 5.5° | 5.5° | |
| Electrical tilt | 0°-10°, continuously adjustable | | 0°-10°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 5° ... 10° T 16 ... 16 ... 18 dB 17 ... 19 ... 21 dB | 0° ... 5° ... 10° T 15 ... 18 ... 18 dB 16 ... 19 ... 22 dB | 0° ... 5° ... 10° T 16 ... 16 ... 16 dB 18 ... 18 ... 18 dB | 0° ... 5° ... 10° T 16 ... 16 ... 16 dB 17 ... 17 ... 18 dB | |
| Impedance | 50 Ω | | | | |
| VSWR | < 1.5 | | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female | | | | |
| Connector position | Bottom | | | | |
| Wind load | Frontal: | 900 N (at 150 km/h) | 2260 N (at 150 mph) | Lateral: | 330 N (at 150 km/h) |
| | Rearside: | 940 N (at 150 km/h) | 2350 N (at 150 mph) | | 830 N (at 150 mph) |
| Max. wind velocity | 241 km/h (150 mph) | | | | |
| Height/width/depth | 1828 / 300 / 152 mm (71.9 / 11.8 / 6.0 inches) | | | | |
| Category of mounting hardware | H (Heavy) | | | | |
| Weight | 26 kg (57.3 lbs) / 28 kg (61.7 lbs) (clamps incl.) | | | | |
| Packing size | 2050 x 322 x 190 mm (80.7 x 12.6 x 7.5 inches) | | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | | |



iRCU specifications (86010149) see page 29

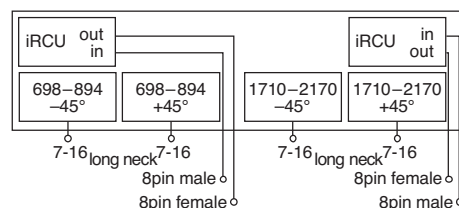

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

KATHREIN

Antennen · Electronic

X

X

85°

85°

iRCU

iRCU

0°–10°

0°–10°




A GLOBAL INITIATIVE

XXPoI Panel iRCU 698–894/1710–2170 85°/85° 16/17.5dBi 0°–10°/0°–10°T

| Type No. | 80010723v01 | | | |
|--|---|---|---|---|
| clamps included | | | | |
| A) Antenna specifications | | | | |
| | 698–894 | | 1710–2170 | |
| Frequency range | 698 – 806 MHz | 824 – 894 MHz | 1710 – 1755 MHz 2110 – 2170 MHz | 1850 – 1990 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 13.5 dBd / 15.65 dBi | 14 dBd / 16.15 dBi | 17.5 dBi | 17.5 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 85° | 85° | 85° | 85° |
| Front-to-back ratio | Copolar: > 28 dB Average: 31 dB | Copolar: > 27 dB Average: 29 dB | Copolar: > 25 dB Average: 28 dB | Copolar: > 25 dB Average: 28 dB |
| Cross polar ratio Main direction Sector | 0° ±60° Typically: > 22 dB > 10 dB, Avg. 16 dB | Typically: > 24 dB > 10 dB, Avg. 16 dB | Typically: > 18 dB > 10 dB, Avg. 12 dB | Typically: > 18 dB > 8 dB, Avg. 12 dB |
| Tracking, Avg. | 0.5 dB | | 0.5 dB | |
| Squint | ±4.0° | | ±4.5° | |
| Vertical Pattern: | | | | |
| Half-power beam width | 9.5° | 8.5° | 5.5° | 5.5° |
| Electrical tilt | 0°–10°, continuously adjustable | | 0°–10°, continuously adjustable | |
| Min. sidelobe suppression for first sidelobe above main beam: Average: | 0° ... 5° ... 10° T 16 ... 16 ... 18 dB 17 ... 19 ... 21 dB | 0° ... 5° ... 10° T 15 ... 18 ... 18 dB 16 ... 19 ... 22 dB | 0° ... 5° ... 10° T 16 ... 16 ... 16 dB 18 ... 18 ... 18 dB | 0° ... 5° ... 10° T 16 ... 16 ... 16 dB 17 ... 17 ... 18 dB |
| Impedance | 50 Ω | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | Intrasystem: > 30 dB, Intersystem: > 35 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | 300 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female | | | |
| Connector position | Bottom | | | |
| Wind load | Frontal: 1210 N (at 150 km/h) 3040 N (at 150 mph) Lateral: 450 N (at 150 km/h) 1130 N (at 150 mph) Rearside: 1270 N (at 150 km/h) 3170 N (at 150 mph) | | | |
| Max. wind velocity | 241 km/h (150 mph) | | | |
| Height/width/depth | 2368 / 300 / 152 mm (93.2 / 11.8 / 6.0 inches) | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 31 kg (68.2 lbs) / 33 kg (72.6 lbs) (clamps incl.) | | | |
| Packing size | 2596 x 322 x 190 mm (102.2 x 12.6 x 7.5 inches) | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | |



iRCU specifications (86010149) see page 29

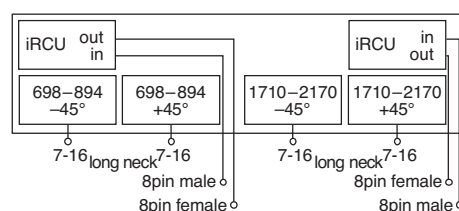

Kathrein's 86010149 integrable Remote Control Unit (iRCU) allow operators to control the electrical tilt of compatible antennas without direct access to the antenna.

- Compliant to AISG 1.1 and 3GPP/AISG 2.0
- Field replaceable without dismantling the antenna
- Daisy Chain feasibility
- Allow control of the antenna either locally through a laptop computer, on site desktop computer, the optional central control unit; remotely via an ethernet network or over the internet



| Type No. | 86010149 |
|--|--|
| Protocols | Compliant to AISG 1.1 and 3GPP/AISG 2.0 |
| Logical interface ex factory ¹⁾ | AISG 2.0/3GPP |
| Input voltage range | 10 ... 30 V (pin 1, pin 6) |
| Power consumption | < 1 W (stand by); < 10 W (motor activated) |
| Connectors ²⁾ | 2 x 8 pin connector according to IEC 60130-9; according to AISG Daisy chain in: male; Daisy chain out: female |
| Hardware interfaces | RS 485A/B (pin 5, pin 3); power supply (pin 1, pin 6); DC return (pin 7); according to AISG / 3GPP |
| Adjustment time (full range) | 40 sec (typically, depending on antenna type) |
| Adjustment cycles | > 50,000 |
| Temperature range | -40 °C ... +60 °C |
| Protection class | IP 24 |
| Lightning protection | AISG interface (each pin); 2.5 kA (10/350µs); 8 kA (8/20µs) |
| Weight | 480 g (1.16 lbs), 1.0 G lbs |
| Packing size | 245 x 93 x 102 mm, (9.6 x 3.6 x 4 inches) |
| Dimensions (H x W x D) | 170 x 68.5 x 66 mm, (6.68 x 2.7 x 2.6 inches) |



¹⁾ The protocol of the logical interface can be switched from 3GPP/AISG 2.0 to AISG 1.1 and vice versa with a vendor specific command.

Please note:

If the Primary of the RET system doesn't support the standard of the 'logical interface ex factory', the iRCU must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.

²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

- Standards
- EN 60950-1 (Safety)
 - EN 55022 (Emission)
 - EN 55024 (Immunity)
 - ETS 300019-1-4 (Environmental)

Certification: CE, FCC15.107 class B

Scope of supply: Integrable Remote Control Unit

Summary – Directional Antennas

Dual Polarization +45°/–45°

800/900

Dual Polarization +45°/–45°

| Type | Type No. | Height [mm] | Connector position | Page | | |
|------------|----------|---------------------|--------------------|------|---------------|----|
| XPol Panel | 790–960 | 30° 18dBi 0°T | 80010642 | 1298 | rearside | 32 |
| XPol Panel | 790–960 | 30° 21dBi 0°T | 80010643 | 2254 | rearside | 32 |
| XPol Panel | 790–960 | 30° 20.5dBi 0°–10°T | 80010456v02 | 2254 | rearside | 33 |
| XPol Panel | 806–960 | 65° 9dBi 0°T | 739619 | 256 | bottom or top | 34 |
| XPol Panel | 806–960 | 65° 12.5dBi 0°T | 739620 | 656 | bottom or top | 34 |
| XPol Panel | 790–960 | 65° 15dBi 0°T | 80010202v02 | 1294 | bottom | 35 |
| XPol Panel | 790–960 | 65° 15dBi 6°T | 80010207v01 | 1294 | bottom | 35 |
| XPol Panel | 790–960 | 65° 15dBi 0°–14°T | 80010303v02 | 1294 | bottom | 36 |
| XPol Panel | 790–960 | 65° 17dBi 0°T | 80010203v02 | 1934 | rearside | 36 |
| XPol Panel | 790–960 | 65° 17dBi 6°T | 80010294v02 | 1934 | rearside | 37 |
| XPol Panel | 790–960 | 65° 16.5dBi 0°–10°T | 80010634v01 | 1934 | rearside | 37 |
| XPol Panel | 790–960 | 65° 18dBi 0°T | 80010204v02 | 2254 | rearside | 38 |
| XPol Panel | 790–960 | 65° 17.5dBi 0°–8°T | 80010305v02 | 2254 | rearside | 38 |
| XPol Panel | 790–960 | 65° 18dBi 0°T | 80010215v01 | 2574 | rearside | 39 |
| XPol Panel | 790–960 | 65° 18dBi 6°T | 80010208v01 | 2574 | rearside | 39 |
| XPol Panel | 790–960 | 65° 17.5dBi 0°–10°T | 80010306v02 | 2574 | bottom | 40 |
| XPol Panel | 790–960 | 65° 18dBi 0°–10°T | 80010307v01 | 2574 | rearside | 40 |
| XPol Panel | 790–960 | 85° 13.5dBi 0°–14°T | 80010308v01 | 1294 | bottom | 41 |
| XPol Panel | 790–960 | 85° 15dBi 0°–10°T | 80010309v01 | 1934 | bottom | 41 |
| XPol Panel | 790–960 | 85° 17dBi 0°T | 80010217v01 | 2574 | rearside | 42 |
| XPol Panel | 790–960 | 85° 16dBi 0°–10°T | 80010310v01 | 2574 | bottom | 42 |
| XPol Panel | 790–960 | 85° 16.5dBi 0°–10°T | 80010300v01 | 2574 | rearside | 43 |

New or changed product

Panel Dual Polarization Half-power Beam Width

790–960

X

30°

KATHREIN
Antennen · Electronic

XPoI Panel 790–960 30° 18dBi 0°T

| Type No. | 80010642 | | |
|--|--|---------------|---------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 2 x 17.5 dBi | 2 x 17.6 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 33° | 32° | 30° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Maidirection 0° | 25 dB | 25 dB | 25 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±1.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 14.5° | 14.0° | 12.8° |
| Sidelobe suppression for first sidelobe above main beam | ≥ 14 dB | ≥ 13 dB | ≥ 12 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rear: 970 / 180 / 1160 N | | |
| Height/width/depth | 1298 / 576 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 13 kg / 15 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



XPoI Panel 790–960 30° 21dBi 0°T

| Type No. | 80010643 | | |
|--|--|------------------|------------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° T | 2 x 20.2 dBi | 2 x 20.4 dBi | 2 x 20.8 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 33° | 32° | 30° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Maidirection 0° | Typically: 30 dB | Typically: 26 dB | Typically: 23 dB |
| Tracking, Avg. | 2.0 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 8.4° | 8.2° | 7.4° |
| Sidelobe suppression for first sidelobe above main beam | > 15 dB | > 15 dB | > 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rear: 1760 / 330 / 2040 N | | |
| Height/width/depth | 2254 / 576 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 20.5 kg / 22.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Panel
Dual Polarization
Half-power Beam Width

790–960

X

30°

KATHREIN
 Antennen · Electronic

800960
 XPol

XPol Panel 790–960 30° 20.5dBi 0°–10°T

| Type No. | 80010456v02 | | |
|--|--|--|--|
| | clamps included | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° T | 2 x 20.0 dBi | 2 x 20.2 dBi | 2 x 20.5 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 33° | 32° | 30° |
| Front-to-back ratio, copolar | > 28 dB | > 29 dB | > 30 dB |
| Cross polar ratio Maindirection 0° | Typically: 25 dB | Typically: 23 dB | Typically: 20 dB |
| Tracking, Avg. | 2.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 9.1° | 8.8° | 8.5° |
| Electrical tilt | 0.5°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T > 16 ... 13 ... 13 dB | 0° ... 5° ... 10° T > 18 ... 18 ... 17 dB | 0° ... 5° ... 10° T > 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1760 / 330 / 2040 N | | |
| Height/width/depth | 2254 / 576 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 22 kg / 24 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

806–960

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 806–960 65° 9dBi

| | | |
|--|---|----------------------------------|
| Type No. | 739619 | |
| Frequency range | 806–960 | |
| | 806 – 880 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Gain | 2 x 8.5 dBi | 2 x 9 dBi |
| Half-power beam width Copolar +45°/–45° | Horizontal: 70° Vertical: 70° | Horizontal: 65° Vertical: 68° |
| Front-to-back ratio, copolar | > 27 dB | > 27 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Isolation | > 30 dB | |
| VSWR | < 1.5 | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 350 W (at 50 °C ambient temperature) | |
| Input | 2 x 7-16 female | |
| Connector position | Bottom or top | |
| Weight | 3 kg | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 40 / 25 / 90 N | |
| Height/width/depth | 256 / 262 / 116 mm | |



XPol Panel 806–960 65° 12.5dBi

| | | |
|--|---|----------------------------------|
| Type No. | 739620 | |
| Frequency range | 806–960 | |
| | 806 – 880 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Gain | 2 x 12 dBi | 2 x 12.5 dBi |
| Half-power beam width Copolar +45°/–45° | Horizontal: 68° Vertical: 29° | Horizontal: 65° Vertical: 27° |
| Front-to-back ratio, copolar | > 30 dB | |
| Isolation | > 30 dB | |
| VSWR | < 1.5 | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | |
| Input | 2 x 7-16 female | |
| Connector position | Bottom or top | |
| Weight | 6 kg | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 110 / 60 / 240 N | |
| Height/width/depth | 656 / 262 / 116 mm | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

800900
XPoI

XPoI Panel 790–960 65° 15dBi 0°T

| Type No. | 80010202v02 | | |
|--|--|--------------------|--------------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 14.5 dBi | 2 x 14.7 dBi | 2 x 15 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 68° | 65° |
| Front-to-back ratio (180°±30°) | > 23 dB | > 24 dB | > 25 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | > 20 dB > 11 dB | > 20 dB > 11 dB | > 20 dB > 11 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 14.7° | 14.3° | 13.2° |
| Sidelobe suppression for first sidelobe above horizon | > 14 dB | > 15 dB | > 14 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 430 / 200 / 600 N | | |
| Height/width/depth | 1294 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 6.5 kg / 8.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



XPoI Panel 790–960 65° 15dBi 6°T

| Type No. | 80010207v02 | | |
|--|--|--|--|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 14.5 dBi | 2 x 14.7 dBi | 2 x 15 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 66° | 65° | 63° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: > 20 dB Typically: > 10 dB | Typically: > 20 dB Typically: > 10 dB | Typically: > 20 dB Typically: > 10 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 16° | 15.7° | 14.6° |
| Electrical tilt | 6°, fixed | | |
| Sidelobe suppression for: first sidelobe above horizon sector 0°–30° above horizon | > 13 dB > 13 dB | > 14 dB > 14 dB | > 16 dB > 14 dB |
| VSWR | < 1.4 | < 1.3 | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 790 / 370 / 1090 N | | |
| Height/width/depth | 1294 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 7.5 kg / 9.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 790–960 65° 15dBi 0°–14°T

| Type No. | 80010303v02 | | |
|---|--|--|--|
| | <i>clamps included</i> | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 14.5 ... 14.4 ... 14.3 | 14.7 ... 14.5 ... 14.4 | 15 ... 14.8 ... 14.7 |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 66° | 65° |
| Front-to-back ratio, copolar | > 24 dB | > 25 dB | > 25 dB |
| Cross polar ratio | | | |
| Maindirection 0° | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 15.7° | 15.5° | 15° |
| Electrical tilt | 0°–14°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above horizon | 0° ... 7° ... 14° T 15 ... 14 ... 15 dB | 0° ... 7° ... 14° T 18 ... 15 ... 15 dB | 0° ... 7° ... 14° T 18 ... 15 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 440 / 210 / 610 N | | |
| Height/width/depth | 1294 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 8.5 kg / 10.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



XPoI Panel 790–960 65° 17dBi 0°T

| Type No. | 80010203v02 | | |
|---|--|---------------|---------------|
| | <i>clamps included</i> | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 16.4 dBi | 2 x 16.6 dBi | 2 x 16.9 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 67° | 65° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | | | |
| Maindirection 0° | > 22 dB | > 22 dB | > 22 dB |
| Sector ±30° | > 18 dB | > 18 dB | > 18 dB |
| Sector ±60° | > 14 dB | > 14 dB | > 14 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 9.9° | 9.5° | 8.9° |
| Sidelobe suppression for first sidelobe above horizon | > 13 dB | > 15 dB | > 15 dB |
| VSWR | < 1.5 | < 1.5 | < 1.4 |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 690 / 310 / 910 N | | |
| Height/width/depth | 1934 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 9.5 kg / 11.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

800900
XPoI

XPoI Panel 790–960 65° 17dBi 6°T

| Type No. | 80010294v02 | | |
|---|--|------------------------------|------------------------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 16.2 dBi | 2 x 16.5 dBi | 2 x 16.9 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 68° | 65° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typ. > 20 dB Typ. > 10 dB | Typ. > 20 dB Typ. > 10 dB | Typ. > 20 dB Typ. > 10 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±1.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 9.4° | 9.3° | 8.8° |
| Electrical tilt | 6°, fixed | | |
| Sidelobe suppression for first sidelobe above horizon | > 14 dB | > 15 dB | > 15 dB |
| VSWR | < 1.5 | < 1.4 | < 1.3 |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 690 / 310 / 910 N | | |
| Height/width/depth | 1934 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 9.5 kg / 11.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



XPoI Panel 790–960 65° 16.5dBi 0°–10°T

| Type No. | 80010634v01 | | |
|---|--|--|--|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.2 ... 16.4 ... 16.2 | 16.3 ... 16.6 ... 16.3 | 16.6 ... 16.8 ... 16.6 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 68° | 65° |
| Front-to-back ratio (180°±30°) | > 24 dB | > 25 dB | > 25 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±1.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 10° | 9.9° | 9.7° |
| Electrical tilt | 0°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB | 0° ... 5° ... 10° T 18 ... 18 ... 18 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 680 / 310 / 900 N | | |
| Height/width/depth | 1934 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 790–960 65° 18dBi 0°T

| Type No. | 80010204v02 | | |
|---|--|--------------------|--------------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 17.2 dBi | 2 x 17.5 dBi | 2 x 17.8 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 67° | 65° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° | > 25 dB > 14 dB | > 25 dB > 14 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 8.5° | 8.3° | 7.8° |
| Sidelobe suppression for first sidelobe above horizon | > 13 dB | > 14 dB | > 15 dB |
| VSWR | < 1.5 | < 1.4 | < 1.4 |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 790 / 370 / 1090 N | | |
| Height/width/depth | 2254 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



XPoI Panel 790–960 65° 17.5dBi 0°–8°T

| Type No. | 80010305v02 | | |
|---|---|---|---|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 16.8 ... 17 ... 16.7 | 16.9 ... 17.1 ... 16.9 | 17.2 ... 17.4 ... 17.0 |
| Tilt | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 67° | 65° |
| Front-to-back ratio, copolar | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° | Typically: 25 dB Typically: > 10 dB | Typically: 25 dB Typically: > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 9.1° | 8.8° | 8.5° |
| Electrical tilt | 0°–8°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 2° ... 4° ... 8° T 18 ... 18 ... 18 ... 16 dB | 0° ... 2° ... 4° ... 8° T 18 ... 18 ... 18 ... 16 dB | 0° ... 2° ... 4° ... 8° T 20 ... 18 ... 17 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 800 / 390 / 1090 N | | |
| Height/width/depth | 2254 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11.5 kg / 13.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

800900
XPol

XPol Panel 790–960 65° 18dBi 0°T

| Type No. | 80010215v01 | | |
|---|--|---------------|---------------|
| | 790–960 | | |
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 17.7 dBi | 2 x 17.9 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 67° | 65° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | 0° | > 25 dB | > 25 dB |
| Sector | ±60° | > 12 dB | > 12 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.4° | 7.2° | 6.8° |
| Sidelobe suppression for first sidelobe above main beam | ≥ 14 dB | ≥ 15 dB | ≥ 15 dB |
| Null-fill | Typically: –25 dB | | |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 940 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



XPol Panel 790–960 65° 18dBi 6°T

| Type No. | 80010208v01 | | |
|---|--|---------------|---------------|
| | 790–960 | | |
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 17.7 dBi | 2 x 17.9 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 69° | 67° | 65° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | 0° | > 25 dB | > 25 dB |
| Sector | ±60° | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.4° | 7.2° | 6.8° |
| Electrical tilt | 6°, fixed | | |
| Sidelobe suppression for first sidelobe above main beam | ≥ 16 dB | ≥ 17 dB | ≥ 17 dB |
| Null-fill | Typically: –25 dB | | |
| Impedance | 50 Ω | | |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 940 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 790–960 65° 17.5dBi 0°–10°T

| Type No. | 80010306v02 | | |
|---|--|---|---|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 17.0 ... 17.1 ... 17.0 | 17.1 ... 17.2 ... 17.1 | 17.3 ... 17.4 ... 17.3 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° |
| Horizontal Pattern: | | | |
| Half-power beam width | 68° | 66° | 65° |
| Front-to-back ratio (180°±30°) | > 24 dB | > 25 dB | > 25 dB |
| Cross polar ratio 0° | Typically: 23 dB | Typically: 23 dB | Typically: 25 dB |
| Sector ±60° | Typically: > 10 dB | Typically: > 10 dB | Typically: > 10 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.7° | 7.5° | 7.3° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T ≥ 17 ... 14 ... 14 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB | 0.5° ... 5° ... 9.5° T ≥ 20 ... 18 ... 18 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female (long neck) | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 940 / 440 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 14 kg / 16 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |

XPoI Panel 790–960 65° 18dBi 0°–10°T

| Type No. | 80010307v01 | | |
|---|--|---|---|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 17.4 ... 17.5 ... 17.4 | 17.5 ... 17.6 ... 17.5 | 17.7 ... 17.9 ... 17.7 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° |
| Horizontal Pattern: | | | |
| Half-power beam width | 68° | 67° | 65° |
| Front-to-back ratio (180°±30°) | > 24 dB | > 25 dB | > 25 dB |
| Cross polar ratio 0° | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB |
| Sector ±60° | Typically: > 10 dB | Typically: > 10 dB | Typically: > 10 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.7° | 7.5° | 7.3° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 940 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 13 kg / 15 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

85°

KATHREIN
Antennen · Electronic

800900
XPoI

XPoI Panel 790–960 85° 13.5dBi 0°–14°T

| Type No. | 80010308v01 | | |
|---|--|--|--|
| | <i>clamps included</i> | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 13.2 ... 13.3 ... 13.2 | 13.3 ... 13.4 ... 13.3 | 13.4 ... 13.5 ... 13.4 |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° |
| Horizontal Pattern: | | | |
| Half-power beam width | 86° | 85° | 83° |
| Front-to-back ratio (180°±0°) | > 24 dB | > 24 dB | > 26 dB |
| Front-to-back ratio (180°±30°) | > 20 dB | > 22 dB | > 24 dB |
| Cross polar ratio 0° | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±1.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 16° | 15.5° | 15° |
| Electrical tilt | 0°–14°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 7° ... 14° T ≥ 17 ... 16 ... 15 dB | 0° ... 7° ... 14° T ≥ 17 ... 17 ... 16 dB | 0° ... 7° ... 14° T ≥ 17 ... 16 ... 16 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 430 / 200 / 590 N | | |
| Height/width/depth | 1294 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 9 kg / 11 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



XPoI Panel 790–960 85° 15dBi 0°–10°T

| Type No. | 80010309v01 | | |
|--|---|--|--|
| | <i>clamps included</i> | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average Gain (dBi) | 14.8 ... 15.0 ... 14.6 | 14.9 ... 15.1 ... 14.7 | 14.8 ... 15.2 ... 15.0 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | | |
| Half-power beam width | 85° | 85° | 83° |
| Front-to-back ratio (180°±0°) | > 25 dB | > 25 dB | > 26 dB |
| Front-to-back ratio (180°±30°) | > 21 dB | > 21 dB | > 21 dB |
| Cross polar ratio 0° | Typically: 23 dB | Typically: 22 dB | Typically: 22 dB |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±3.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 10.1° | 9.8° | 9.6° |
| Electrical tilt | 0°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam: | 0° ... 5° ... 10° T ≥ 15 ... 15 ... 14 dB | 0° ... 5° ... 10° T ≥ 15 ... 15 ... 15 dB | 0° ... 5° ... 10° T ≥ 18 ... 18 ... 18 dB |
| Avg.: | ≥ 19 ... 19 ... 19 dB | ≥ 20 ... 20 ... 20 dB | ≥ 22 ... 22 ... 22 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load | Frontal / lateral / rearside: 680 / 310 / 900 N (at 150 km/h) | | |
| Height/width/depth | 1934 / 259 / 99 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11.5 kg / 13.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Panel Dual Polarization Half-power Beam Width

790–960

X

85°

KATHREIN
Antennen · Electronic

XPoI Panel 790–960 85° 17dBi 0°T

| Type No. | 80010217v01 | | |
|--|--|---------------|---------------|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 16.6 dBi | 16.7 dBi | 16.8 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 86° | 85° | 83° |
| Front-to-back ratio (180°±0°) | > 25 dB | > 25 dB | > 25 dB |
| Front-to-back ratio (180°±30°) | > 23 dB | > 24 dB | > 24 dB |
| Cross polar ratio Sector 0° | > 20 dB | > 20 dB | > 20 dB |
| ±60° | > 15 dB | > 15 dB | > 13 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±4.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.5° | 7.3° | 7.0° |
| Sidelobe suppression for first sidelobe above main beam | 16 dB | 17 dB | 16 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 940 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



XPoI Panel 790–960 85° 16dBi 0°–10°T

| Type No. | 80010310v01 | | |
|--|--|---|---|
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 15.8 ... 15.6 ... 15.4 | 16.0 ... 15.9 ... 15.8 | 16.2 ... 16.2 ... 16.2 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° |
| Horizontal Pattern: | | | |
| Half-power beam width | 86° | 85° | 83° |
| Front-to-back ratio (180°±0°) | > 24 dB | > 24 dB | > 26 dB |
| Front-to-back ratio (180°±30°) | > 20 dB | > 22 dB | > 24 dB |
| Cross polar ratio Sector 0° | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB |
| ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±3.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 8.1° | 7.9° | 7.6° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T ≥ 18 ... 14 ... 14 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 17 ... 16 dB | 0.5° ... 5° ... 9.5° T ≥ 17 ... 16 ... 16 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 950 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 14 kg / 16 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Panel
Dual Polarization
Half-power Beam Width

790–960

X

85°

KATHREIN
 Antennen · Electronic

80010300
 XPol

XPol Panel 790–960 85° 16.5dBi 0°–10°T

| Type No. | 80010300v01 | | |
|--|--|---|---|
| | clamps included | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 16.2 ... 16.2 ... 15.8 | 16.3 ... 16.3 ... 16.1 | 16.5 ... 16.6 ... 16.5 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° |
| Horizontal Pattern: | | | |
| Half-power beam width | 85° | 85° | 83° |
| Front-to-back ratio (180°±0°) | > 24 dB | > 25 dB | > 26 dB |
| Front-to-back ratio (180°±30°) | > 21 dB | > 23 dB | > 24 dB |
| Cross polar ratio Sector 0° ±60° | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±3.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 8° | 7.8° | 7.6° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 14 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 17 ... 16 dB | 0.5° ... 5° ... 9.5° T ≥ 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Rearside | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rear: 940 / 420 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 14 kg / 16 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



Summary – Directional Antennas

2-Broad-band

800/900

Dual Polarization +45°/-45°

| Type | Type No. | Height [mm] | Connector position | Page | | | |
|-------------|----------|-------------|--------------------|-----------------|------|----------|----|
| XXPol Panel | 790-862 | 65° 14.5dBi | 0°-12°T | 80010667 | 1355 | bottom | 46 |
| | 880-960 | 65° 15dBi | 0°-12°T | | | | |
| XXPol Panel | 790-862 | 65° 16dBi | 0°-10°T | 80010668 | 1934 | bottom | 47 |
| | 880-960 | 65° 16.5dBi | 0°-10°T | | | | |
| XXPol Panel | 790-862 | 65° 17dBi | 0°-8°T | 80010669 | 2574 | bottom | 48 |
| | 880-960 | 65° 17.5dBi | 0°-8°T | | | | |
| XXPol Panel | 824-960 | 60° 16dBi | 0°-10°T | 80010516v01 | 2024 | rearside | 49 |
| | 824-960 | 60° 16dBi | 0°-10°T | | | | |
| XXPol Panel | 790-960 | 65° 17.5dBi | 0°-8°T | 80010647v01 | 2254 | rearside | 50 |
| | 790-960 | 65° 17.5dBi | 0°-8°T | | | | |
| XXPol Panel | 824-960 | 65° 17dBi | 0°-8°T | 80010517v01 | 2631 | rearside | 51 |
| | 824-960 | 65° 17dBi | 0°-8°T | | | | |
| XXPol Panel | 790-960 | 90° 15dBi | 0°-10°T | 80010816 | 1934 | rearside | 52 |
| | 790-960 | 90° 15dBi | 0°-10°T | | | | |
| XXPol Panel | 790-960 | 90° 16dBi | 0°-8°T | 80010817 | 2896 | rearside | 53 |
| | 790-960 | 90° 16dBi | 0°-8°T | | | | |

New or changed product

When deploying
2-Broad-band Antennas,
please also consider using
special Hybrid Combiners
(see page 277)


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–862 | 880–960 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 14.5/15dBi 0°–12°/0°–12°T

| | | |
|---|--|--|
| Type No. | 80010667 | |
| | <i>clamps included</i> | |
| | 790–862 | 880–960 |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 14.3 ... 14.4 ... 14.1 | 14.8 ... 15.0 ... 14.6 |
| Tilt | 0° ... 6° ... 12° | 0° ... 6° ... 12° |
| Horizontal Pattern: | | |
| Half-power beam width | 68° | 64° |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB |
| Cross polar ratio | | |
| Main direction 0° | 20 dB | 20 dB |
| Sector ±60° | > 10 dB | > 10 dB |
| Vertical Pattern: | | |
| Half-power beam width | 15.2° | 13.9° |
| Electrical tilt, continuously adjustable | 0°–12° | 0°–12° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 6° ... 12° T ≥ 17 ... 16 ... 15 dB | 0° ... 6° ... 12° T ≥ 17 ... 15 ... 15 dB |
| VSWR | < 1.5 | |
| Isolation: Intrasystem | > 28 dB, Typ. > 30 dB | |
| Isolation: Intersystem | > 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz) | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 350 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female | |
| Connector position | Bottom | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 630 / 220 / 730 N | |
| Height/width/depth | 1355 / 303 / 99 mm | |
| Category of mounting hardware | M (Medium) | |
| Weight | 14 kg / 16 kg (clamps incl.) | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | |

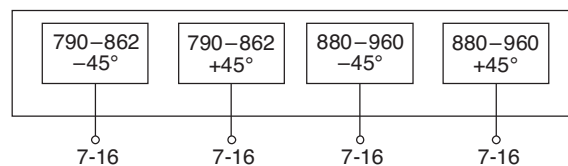

Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–862 | 880–960 |
| X | X |
| 65° | 65° |


KATHREIN
Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 16/16.5dBi 0°–10°/0°–10°T

| | | |
|---|--|--|
| Type No. | 80010668 <i>clamps included</i> | |
| | 790–862 | 880–960 |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 15.9 ... 16.0 ... 15.8 | 16.3 ... 16.6 ... 16.1 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | |
| Half-power beam width | 67° | 63° |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB |
| Cross polar ratio | | |
| Maindirection 0° | 23 dB | 25 dB |
| Sector ±60° | > 10 dB | > 10 dB |
| Vertical Pattern: | | |
| Half-power beam width | 10° | 9.7° |
| Electrical tilt, continuously adjustable | 0°–10° | 0°–10° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T ≥ 17 ... 16 ... 16 dB | 0° ... 5° ... 10° T ≥ 18 ... 16 ... 16 dB |
| VSWR | < 1.5 | |
| Isolation: Intrasystem | > 28 dB, Typ. > 30 dB | |
| Isolation: Intersystem | > 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz) | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female | |
| Connector position | Bottom | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 920 / 320 / 1050 N | |
| Height/width/depth | 1934 / 303 / 99 mm | |
| Category of mounting hardware | M (Medium) | |
| Weight | 18.5 kg / 20.5 kg (clamps incl.) | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | |



800900
XXPol

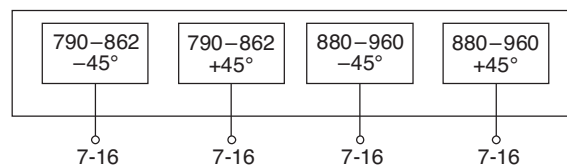


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–862 | 880–960 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 17/17.5dBi 0°–8°/0°–8°T

| | | | |
|---|--|---|-----------------|
| Type No. | 80010669 | | clamps included |
| | 790–862 | 880–960 | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | |
| Polarization | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.6 ... 16.9 ... 16.6 | 17.1 ... 17.4 ... 17.1 | |
| Tilt | 0° ... 4° ... 8° | 0° ... 4° ... 8° | |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | |
| Cross polar ratio | | | |
| Main direction 0° | > 25 dB | > 23 dB | |
| Sector ±60° | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.7° | 7.2° | |
| Electrical tilt, continuously adjustable | 0°–8° | 0°–8° | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° T ≥ 18 ... 15 ... 15 dB | 0° ... 4° ... 8° T ≥ 18 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | |
| Isolation: Intrasystem | > 28 dB, Typ. > 30 dB | | |
| Isolation: Intersystem | > 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz) | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 350 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1270 / 430 / 1430 N | | |
| Height/width/depth | 2574 / 303 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |

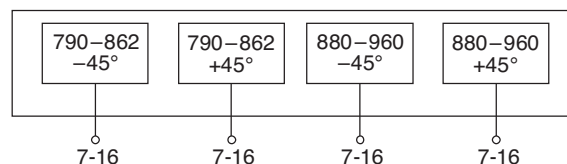

2-Multi-band Panel

Dual Polarization

Half-power Beam Width

| |
|---------|
| 824-960 |
|---------|

| |
|---------|
| 824-960 |
|---------|

| |
|---|
| X |
|---|

| |
|---|
| X |
|---|

| |
|-----|
| 60° |
|-----|

| |
|-----|
| 60° |
|-----|

KATHREIN


Antennen · Electronic

XXPol Panel 824-960/824-960 60°/60° 16/16dBi 0°-10°/0°-10°T

| | | | |
|---|--|--|-----------------|
| Type No. | 80010516v01 | | clamps included |
| | 824-960 | | |
| Frequency range | 824 – 894 MHz | 880 – 960 MHz | |
| Polarization | +45°, -45°; +45°, -45° | +45°, -45°; +45°, -45° | |
| Gain at 0° tilt | 4 x 15.5 dBi | | 4 x 15.7 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 60° | 58° | |
| Front-to-back ratio | > 25 dB | | > 25 dB |
| Cross polar ratio | 0° | Typically: 15 dB | |
| Sector | ±60° | > 10 dB | |
| Vertical Pattern: | | | |
| Half-power beam width | 9.8° | 9.3° | |
| Electrical tilt | 0°-10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T ≥ 14 ... 15 ... 15 dB | 0° ... 5° ... 10° T ≥ 14 ... 15 ... 15 dB | |
| VSWR | < 1.5 | | |
| Isolation, between ports | Typically: > 25 dB | Typically: > 28 dB | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | |
| Connector position | Rearside, pointing downwards | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 910 / 300 / 1150 N | | |
| Height/width/depth | 2024 / 374 / 169 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 23 kg / 25 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



800900
XXPol

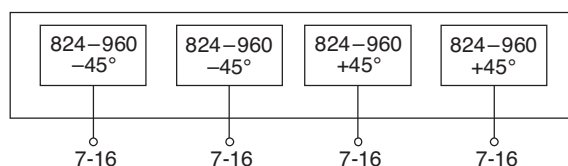


2-Multi-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–960 | 790–960 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/790–960 65°/65° 17.5/17.5dBi 0°–8°/0°–8°T

| | | | | |
|--|---|---|---|-----------------|
| Type No. | 80010647v01 | | | clamps included |
| | 790–960 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.9 ... 17.1 ... 17.0 | 17.0 ... 17.2 ... 17.1 | 17.3 ... 17.4 ... 17.1 | |
| Tilt | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 66° | 65° | 64° | |
| Front-to-back ratio, copolar | > 27 dB | > 27 dB | > 27 dB | |
| Cross polar ratio | Typically: 25 dB | | | |
| Main direction | Typically: > 10 dB | | | |
| Sector | Typically: > 10 dB | | | |
| Tracking, Avg. | 1.0 dB | | | |
| Squint | ±2.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 9.1° | 9.0° | 8.5° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB | 0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB | 0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Rearside | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1760 / 330 / 2040 N | | | |
| Height/width/depth | 2254 / 576 / 99 mm | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

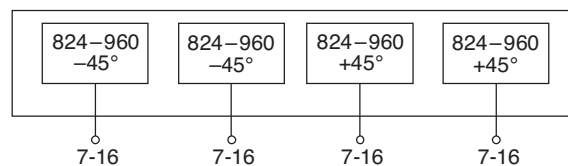

2-Multi-band Panel

Dual Polarization

Half-power Beam Width

824–960

824–960

X

X

65°

65°

KATHREIN


Antennen · Electronic

XXPol Panel 824–960/824–960 65°/65° 17/17dBi 0°–8°/0°–8°T

| Type No. | 80010517v01 <i>clamps included</i> | |
|---|--|---|
| | 824–960 | |
| Frequency range | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° |
| Gain at 0° tilt | 4 x 16.5 dBi | 4 x 16.7 dBi |
| Horizontal Pattern: | | |
| Half-power beam width | 66° | 61° |
| Front-to-back ratio | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 16 dB | Typically: 17 dB |
| Sector | 0° ±60° | > 8 dB > 10 dB |
| Vertical Pattern: | | |
| Half-power beam width | 7.2° | 6.8° |
| Electrical tilt | 0°–8°, continuously adjustable | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° T ≥ 15 ... 15 ... 15 dB | 0° ... 4° ... 8° T ≥ 15 ... 16 ... 15 dB |
| VSWR | < 1.5 | |
| Isolation, between ports | Typically: > 25 dB | > 28 dB |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | |
| Input | 4 x 7-16 female | |
| Connector position | Rearside, pointing downwards | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1210 / 400 / 1540 N | |
| Height/width/depth | 2631 / 374 / 169 mm | |
| Category of mounting hardware | H (Heavy) | |
| Weight | 28 kg / 30 kg (clamps incl.) | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | |



800900
XXPol

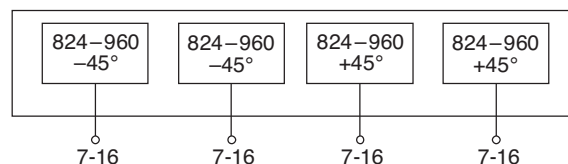


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–960 | 790–960 |
| X | X |
| 90° | 90° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/790–960 90°/90° 15/15dBi 0°–10°/0°–10°

| | | | | |
|---|--|--|--|-----------------|
| Type No. | 80010816 | | | clamps included |
| | 790–960 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 14.5 ... 14.5 ... 14.3 | 14.6 ... 14.8 ... 14.5 | 14.8 ... 15.0 ... 14.8 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 93° | 90° | 87° | |
| Front-to-back ratio (180°±0°) | > 24 dB | > 24 dB | > 25 dB | |
| Front-to-back ratio (180°±30°) | > 20 dB | > 21 dB | > 22 dB | |
| Cross polar ratio | Typically: 20 dB | Typically: 20 dB | Typically: 18 dB | |
| Sector | ±60° | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | |
| Half-power beam width | 10.5° | 10.2° | 10° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T ≥ 18 ... 15 ... 14 dB | 0° ... 5° ... 10° T ≥ 18 ... 17 ... 16 dB | 0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | Intrasystem: > 28 dB, Intersystem: > 26 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Rearside | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (approx.) (at 150 km/h) | Frontal / lateral / rearside: 910 / 380 / 1150 N | | | |
| Height/width/depth | 1934 / 374 / 106 mm | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight (approx.) | 17 kg / 19 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

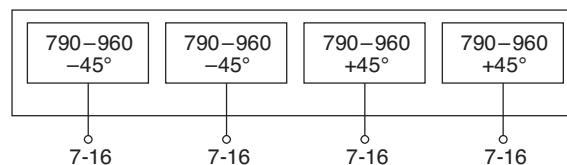

Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|---------|
| 790–960 | 790–960 |
| X | X |
| 90° | 90° |


KATHREIN
Antennen · Electronic

XXPol Panel 790–960/790–960 90°/90° 16/16dBi 0°–8°/0°–8°T

| | | | | |
|---|--|---|---|------------------------|
| Type No. | 80010817 | | | clamps included |
| | 790–960 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 15.4 ... 15.4 ... 15.0 | 15.7 ... 15.7 ... 15.4 | 16.0 ... 16.1 ... 15.9 | |
| Tilt | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 93° | 90° | 87° | |
| Front-to-back ratio (180°±0°) | > 24 dB | > 24 dB | > 25 dB | |
| Front-to-back ratio (180°±30°) | > 20 dB | > 21 dB | > 22 dB | |
| Cross polar ratio | Typically: 20 dB | Typically: 20 dB | Typically: 18 dB | |
| Sector | 0° ±60° | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.4° | 7.2° | 6.9° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB | 0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB | 0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | Intrasystem: > 27 dB, Intersystem: > 27 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1270 / 400 / 1710 N | | | |
| Height/width/depth | 2631 / 374 / 106 mm | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |



800900
XXPol

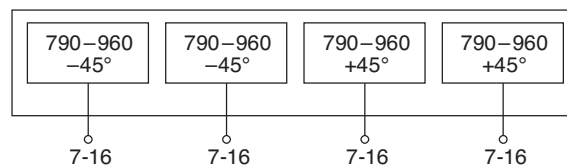

Summary – Directional Antennas

Vertical Polarization

800/900 / 1800/1900/2000

VPol – 800/900

| Type | Type No. | Height [mm] | Connector position | Page | |
|-------------|----------------------------------|------------------|--------------------|---------------|----|
| VPol Panel | 870–960 20° 16.5dBi 0°T | 735727 | 492 | bottom | 56 |
| VPol BiDir | 790–960 / 1710–2170 65° 5dBi 0°T | 738445 | 312 | | 57 |
| VPol BiDir | 790–960 / 1710–2170 65° 5dBi 0°T | 738446 | 312 | | 57 |
| VPol LogPer | 790–2690 65° 11dBi 0°T | 742192v01 | 300 | bottom | 58 |
| VPol Panel | 790–960 65° 18.5dBi 0°T | 730376v02 | 2574 | rearside | 59 |
| VPol Panel | 872–960 90° 7.5dBi 0°T | 736854 | 262 | bottom or top | 60 |
| VPol Panel | 790–960 90° 17dBi 0°T | 730378v02 | 2574 | rearside | 60 |
| VPol Panel | 870–960 120° 16dBi 0°T | 730382 | 2574 | rearside | 61 |

VPol – 800/900 / 1800/1900/2000

| | | | | | |
|-------------|----------------------------------|-----------|-----|--------|----|
| VPol Panel | 1710–2180 12° 18.5dBi 0°T | 80010368 | 299 | side | 62 |
| VPol BiDir | 790–960 / 1710–2170 65° 5dBi 0°T | 738445 | 312 | | 57 |
| VPol BiDir | 790–960 / 1710–2170 65° 5dBi 0°T | 738446 | 312 | | 57 |
| VPol LogPer | 790–2690 65° 11dBi 0°T | 742192v01 | 300 | bottom | 58 |

VVPol – 800/900 / 1800/1900/2000

| | | | | | |
|-------------|-------------------------|----------|-----|---------------|----|
| VVPol Panel | 824–960 C 90° 7dBi 0°T | 742290 | 328 | bottom or top | 63 |
| | 1710–2170 82° 7dBi 0°T | | | | |
| VVPol Panel | 824–960 C 90° 10dBi 0°T | 80010046 | 662 | bottom or top | 63 |
| | 1710–2170 82° 11dBi 0°T | | | | |

C = integrated Combiner

New or changed product

Additional versions on request

Panel
Vertical Polarization
Half-power Beam Width

870–960

V

20°

KATHREIN
 Antennen · Electronic

VPol Panel 870–960 20° 16.5dBi

| | |
|-------------------------------|---|
| Type No. | 735727 |
| Frequency range | 870 – 960 MHz |
| Polarization | Vertical |
| Gain | 16.5 dBi |
| Half-power beam width | H-plane: 20° E-plane: 33° |
| Impedance | 50 Ω |
| VSWR | < 1.3 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power per input | 500 W (at 50 °C ambient temperature) |
| Input | 7-16 female |
| Connector position | Rearside |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 500 / 70 / 715 N |
| Height/width/depth | 492 / 992 / 190 mm |
| Category of mounting hardware | M (Medium) |
| Packing size | 1010 x 630 x 265 mm |



Material: Radiator: Aluminum. Reflector screen: Weather-proof aluminum.
 Radome: Fiberglass, color: White.
 All screws and nuts: Stainless steel.

Ice protection: Ice protection: Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.

Grounding: The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

Accessories (order separately)

| Type No. | Description | Remarks | Weight approx. | Units per antenna |
|----------|-------------|-----------------------------|----------------|-------------------|
| 731651 | 1 clamp | Mast: 28 – 60 mm diameter | 0.8 kg | 2 |
| 738546 | 1 clamp | Mast: 50 – 115 mm diameter | 1.0 kg | 2 |
| 85010002 | 1 clamp | Mast: 110 – 220 mm diameter | 2.7 kg | 2 |
| 85010003 | 1 clamp | Mast: 210 – 380 mm diameter | 4.8 kg | 2 |

Multi-band Bidirectional Antenna 790–960/1710–2170

KATHREIN

Vertical Polarization

V

Antennen · Electronic

Half-power Beam Width

65°

VPol BiDir 790–960/1710–2170 65° 5dBi

| Type No. | 738445 | 738446 |
|-----------------------|--|--------------|
| Input | 1 x 7-16 female | 1 x N female |
| Frequency range | 790 – 960 MHz, 1710 – 2170 MHz | |
| VSWR | 790 – 806 MHz: < 2.2 806 – 824 MHz: < 1.7 824 – 960 / 1710 – 2170 MHz: < 1.5 | |
| Gain | 790 – 960 MHz: 5 dBi 1710 – 1880 MHz: 5.5 dBi 1880 – 2170 MHz: 6.5 dBi | |
| Impedance | 50 Ω | |
| Polarization | Vertical | |
| Max. power (total) | 200 W (at 50 °C ambient temperature) | |
| Weight | 0.8 kg | |
| Half-power beam width | Frontal: 25 N (at 150 km/h) Lateral: 65 N (at 150 km/h) Rearside: 35 N (at 150 km/h) | |
| Max. wind velocity | 200 km/h | |
| Packing size | 422 x 212 x 95 mm | |
| Height/width/depth | 312 / 55 / 188 mm | |



800/900 VPol
1800/1900/2000 VPol

- Material:** Radiator: Tin-plated copper.
Reflector: Weather-proof aluminum.
Radome: High impact plastic, colour: Grey.
All screws and nuts: Stainless steel.
- Mounting:** Wall mounting: No additional mounting kit needed.
For pipe mast mounting use clamps listed below (order separately).
- Ice protection:** The radiating system is protected by the radome. Due to its very sturdy construction, the antenna remains operational even under icy conditions.
- Grounding:** All metal parts of the antenna as well as the inner conductor are DC grounded.

Accessories (order separately)

| Type No. | Description | Remarks | Weight approx. | Units per antenna |
|----------|-------------|-----------------------------|----------------|-------------------|
| 734360 | 2 clamps | Mast: 34 – 60 mm diameter | 60 g | 1 |
| 734361 | 2 clamps | Mast: 60 – 80 mm diameter | 70 g | 1 |
| 734362 | 2 clamps | Mast: 80 – 100 mm diameter | 80 g | 1 |
| 734363 | 2 clamps | Mast: 100 – 120 mm diameter | 90 g | 1 |
| 734364 | 2 clamps | Mast: 120 – 140 mm diameter | 110 g | 1 |
| 734365 | 2 clamps | Mast: 45 – 125 mm diameter | 80 g | 1 |

Logarithmic Periodic Vertical Polarization Half-power Beam Width

790–2690

V

65°

KATHREIN
Antennen · Electronic

VPol LogPer 790–2690 65° 11dBi

| Type No. | 742192v01 | | | | |
|---|--|----------------|-----------------|-----------------|-----------------|
| Frequency range | 790 – 960 MHz | 960 – 1710 MHz | 1710 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| VSWR | < 1.5 | < 1.5 | < 1.5 | < 1.5 | < 1.6 |
| Gain | 10.8 dBi | 11.0 dBi | 11.2 dBi | 11.0 dBi | 10.8 dBi |
| Impedance | 50 Ω | 50 Ω | 50 Ω | 50 Ω | 50 Ω |
| Polarization | Vertical | Vertical | Vertical | Vertical | Vertical |
| Front-to-back ratio | > 25 dB | > 25 dB | > 25 dB | > 22 dB | > 25 dB |
| Half-power beam width horizontal vertical | 65° 53° | 60° 50° | 55° 47° | 50° 45° | 50° 45° |
| Intermodulation IM3 (2 x 43 dBm carrier) | < -150 dBc | < -150 dBc | < -150 dBc | < -150 dBc | < -150 dBc |
| Max. power Total power | 300 W | 250 W | 200 W | 170 W | 150 W |
| | 500 W (at 50 °C ambient temperature) | | | | |
| Input | 1 x 7-16 female | | | | |
| Connector position | Bottom | | | | |
| Weight | 5.5 kg | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 20 / 210 / 30 N | | | | |
| Height/width/depth | 300 / 155 / 785 mm | | | | |

- Material:** Radiator: Tin-plated copper. Reflector screen: Weather-proof aluminum.
Radome: Fiberglass, color: Grey.
All screws and nuts: Stainless steel
- Mounting:** The antenna can be mounted on tubular mast with a diameter of 30 – 70 mm with supplied clamps.
- Ice protection:** Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.
- Grounding:** All metal parts of the antenna as well as the inner conductor are DC grounded.



Panel
Vertical Polarization
Half-power Beam Width

790–960
V
65°

KATHREIN
 Antennen · Electronic

VPol Panel 790–960 65° 18.5dBi

| | | | | |
|---|--|---------------------------------|-----------------|-----------------|
| Type No. | 730376v02 | | | clamps included |
| Frequency range | 790 – 862 MHz | 790–960 824 – 894 MHz | 880 – 960 MHz | |
| Polarization | Vertical | | | |
| Gain | 17.8 dBi | 18.0 dBi | 18.4 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 67° | 65° | |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.4° | 7.2° | 6.8° | |
| Sidelobe suppression for first sidelobe above horizon | > 17 dB | > 17 dB | > 18 dB | |
| VSWR | < 1.5 | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | |
| Input | 7-16 female | | | |
| Connector position | Rearside | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 740 / 330 / 1270 N (at 150 km/h) | | | |
| Height/width/depth | 2574 / 259 / 99 mm | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |



800/900 VPol
 1800/1900/2000 VPol

Panel 790/872...960
Vertical Polarization V
Half-power Beam Width 90°

KATHREIN
 Antennen · Electronic

VPol Panel 872–960 90° 7.5dBi

| | |
|-------------------------|---|
| Type No. | 736854 |
| Frequency range | 872 – 960 MHz |
| Polarization | Vertical |
| Gain | 7.5 dBi |
| Half-power beam width | H-plane: 90° E-plane: 70° |
| Front-to-back ratio | > 20 dB |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -140 dBc (2 x 43 dBm carrier) |
| Max. power | 350 W (at 50 °C ambient temperature) |
| Input | N female |
| Connector position | Bottom or top |
| Weight | 1.5 kg |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 45 / 20 / 60 N |
| Height/width/depth | 262 / 155 / 49 mm |



VPol Panel 790–960 90° 17dBi

| | | | |
|---|--|---------------|---------------|
| Type No. | 730378v02 clamps included | | |
| | 790–960 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz |
| Polarization | Vertical | | |
| Gain | 16.6 dBi | 16.7 dBi | 17.0 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 90° | 90° | 90° |
| Front-to-back ratio (180°±30°) | > 22 dB | > 22 dB | > 22 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 7.1° | 6.9° | 6.6° |
| Sidelobe suppression for first sidelobe above horizon | > 12 dB | > 12 dB | > 12 dB |
| Impedance | 50 Ω | | |
| VSWR | < 1.5 | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Input | 7-16 female | | |
| Connector position | Rearside | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 930 / 410 / 1270 N | | |
| Height/width/depth | 2574 / 259 / 99 mm | | |
| Category of mounting hardware | H (Heavy) | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | |



800/900 VPol
1800/1900/2000 VPol

Panel
Vertical Polarization
Half-power Beam Width

870–960

V

120°

KATHREIN
 Antennen · Electronic

VPol Panel 870–960 120° 16dBi

| | |
|-------------------------|---|
| Type No. | 730382 |
| Frequency range | 870 – 960 MHz |
| Polarization | Vertical |
| Gain | 16 dBi |
| Half-power beam width | H-plane: 120° E-plane: 6.5° |
| Front-to-back ratio | > 20 dB |
| VSWR | < 1.3 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |
| Input | 7-16 female |
| Connector position | Rearside |
| Weight | 12 kg |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 740 / 330 / 1270 N |
| Height/width/depth | 2574 / 258 / 103 mm |



800/900 VPol
 1800/1900/2000 VPol

Multi-band Antenna
Vertical Polarization
Half-power Beam Width

1710–2180


V

12°

KATHREIN
 Antennen · Electronic

VPol Panel 1710–2180 12° 18.5dBi 0°T

| Type No. | 80010368 | | |
|---|--|-------------------------------------|-----------------|
| Frequency range | 1710 – 1880 MHz | 1710–2180 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | Vertical | Vertical | Vertical |
| Gain | 18.1 dBi | 18.4 dBi | 18.7 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 13.3° | 12.8° | 12° |
| Front-to-back ratio (180°±30°) | > 30 dB | > 30 dB | > 30 dB |
| Sidelobe suppression | > 18 dB | > 18 dB | > 17 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 37° | 36° | 36° |
| Electrical tilt | 0°, fixed | | |
| Sidelobe suppression for first sidelobe above main beam | > 18 dB | > 18 dB | > 18 dB |
| VSWR | < 1.5 | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 1 x 7-16 female | | |
| Connector position | Side (see picture) | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 340 / 25 / 400 N | | |
| Height/width/depth | 299 / 743 / 69 mm | | |
| Weight | 9 kg | | |

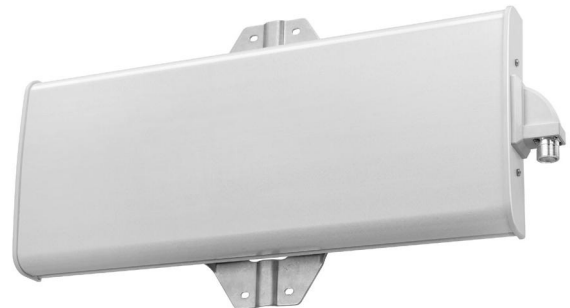


Dual-band Panel
Vertical Polarization
Half-power Beam Width

| | |
|----------------|------------------|
| 824–960 | 1710–2170 |
| V | V |
| 90° | 82° |

VVPol Panel 824–960/1710–2170 C 90°/82° 7/7dBi



| Type No. | 742290 | |
|---|--|--|
| Frequency range | 824 – 960 MHz | 1710 – 2170 MHz |
| Polarization | Vertical | Vertical |
| Gain | 7 dBi | 7 dBi |
| Half-power beam width | Horizontal: 90° Vertical: 60° | Horizontal: 82° Vertical: 70° |
| Front-to-back ratio | > 18 dB | > 20 dB |
| VSWR | < 1.7 (824 – 960 MHz) < 1.5 (870 – 960 MHz) | < 1.7 (1710 – 2170 MHz) < 1.5 (1710 – 1990 MHz) |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc |
| Max. power | 100 W (at 50 °C ambient temperature) | |
| Input | 1 x 7-16 female | |
| Connector position | Bottom or top | |
| Weight | 2.8 kg | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 90 / 23 / 100 N | |
| Height/width/depth | 328 / 155 / 69 mm | |

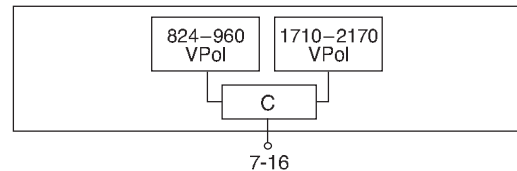

800/900 VPol
1800/1900/2100 VPol

VVPol Panel 824–960/1710–2170 C 90°/82° 10/11dBi

| Type No. | 80010046 | |
|---|---|----------------------------------|
| Frequency range | 824 – 960 MHz | 1710 – 2170 MHz |
| Polarization | Vertical | Vertical |
| Gain | 10 dBi | 11 dBi |
| Half-power beam width | Horizontal: 90° Vertical: 33° | Horizontal: 82° Vertical: 19° |
| Front-to-back ratio | > 18 dB | > 20 dB |
| VSWR | < 1.7 (824 – 960 MHz) < 1.5 (870 – 960 MHz) | < 1.5 |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc |
| Max. power | 100 W (at 50 °C ambient temperature) | |
| Input | 1 x 7-16 female | |
| Connector position | Bottom or top | |
| Weight | 5 kg | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 175 / 47 / 200 N | |
| Height/width/depth | 662 / 155 / 69 mm | |

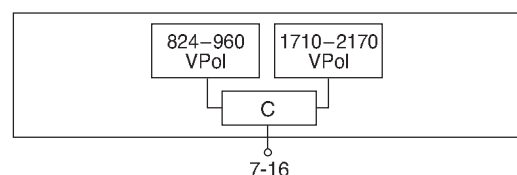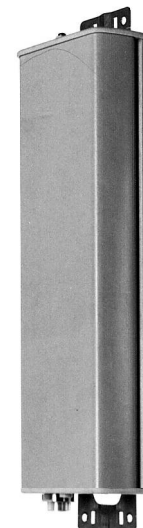

Summary – Directional Antennas

Dual Polarization +45°/–45°

1800/1900/2000/2600

Dual Polarization +45°/–45°

| Type | Type No. | Height [mm] | Connector position | Page |
|---|-----------------|-------------|--------------------|------|
| XPol Panel 1710–2170 30° 20dBi 0°–12°T | 80010251v01 | 1032 | bottom | 66 |
| XPol Panel 1710–2170 30° 21dBi 0°–8°T | 742351v01 | 1304 | bottom | 66 |
| XPol Panel 1710–2170 45° 19.5dBi 0°–8°T | 742218v01 | 1306 | bottom | 67 |
| XPol Panel 1710–2170 45° 21.5dBi 0°–6°T | 742219v01 | 1946 | bottom | 67 |
| XPol Panel 1710–2170 65° 9dBi 0°T | 742210v01 | 155 | bottom or top | 68 |
| XPol Panel 1710–2170 65° 12dBi 2°T | 739489v01 | 342 | bottom | 68 |
| XPol Panel 1710–2690 65° 12dBi 4°T | 80010761 | 278 | bottom | 69 |
| XPol Panel 1710–2170 65° 16dBi 0°T | 742196v01 | 735 | bottom or top | 69 |
| XPol Panel 1710–2200 65° 15.5dBi 0°–12°T | 80010247v01 | 735 | bottom | 70 |
| XPol Panel 1710–2690 65° 16.5dBi 0°–12°T | 80010681 | 851 | bottom | 71 |
| XPol Panel 1710–2200 65° 18.3dBi 0°T | 80010425v01 | 1302 | bottom | 72 |
| XPol Panel 1710–2200 65° 18.3dBi 2°T | 80010426v01 | 1302 | bottom | 72 |
| XPol Panel 1710–2200 65° 18dBi 6°T | 80010428v01 | 1302 | bottom | 73 |
| XPol Panel 1710–2170 65° 18dBi 0°–8°T | 742214v01 | 1142 | bottom | 73 |
| XPol Panel 1710–2200 65° 18dBi 0°–10°T | 742215v01 | 1314 | bottom | 74 |
| XPol Panel 1710–2200 65° 18dBi 2°–10°T ESLS | 80010614v01 | 1314 | bottom | 74 |
| XPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS | 80010504v01 | 1387 | bottom | 75 |
| XPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS | 80010621v01 | 1410 | bottom | 76 |
| XPol Panel 1710–2200 65° 19.5dBi 0°–6°T | 742213v01 | 1954 | bottom | 77 |
| XPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS | 80010505v01 | 1984 | bottom | 78 |
| XPol Panel 1710–2200 62° 19dBi 0°–8°T HE | 80010636 | 1407 | bottom | 79 |
| XPol Panel 1710–2690 65° 19dBi 0°–6°T | 80010651 | 1670 | bottom | 80 |
| XPol Panel 1710–2200 65° 21dBi 0°T HE | 80010439v01 | 2172 | bottom or top | 81 |
| XPol Panel 1710–2200 62° 21.2dBi 0°–6°T HE | 80010378 | 2548 | bottom | 81 |
| XPol Panel 1710–2170 90° 11.5dBi 0°T | 741984v01 | 342 | bottom or top | 82 |
| XPol Panel 1710–2170 90° 14dBi 0°–10°T | 741988v01 | 662 | bottom | 82 |
| XPol Panel 1710–2200 90° 17dBi 0°–8°T | 741989v01 | 1302 | bottom | 83 |
| XPol Panel 1710–2170 90° 18dBi 0°–6°T | 741990v01 | 1942 | bottom | 83 |

Antennas with Dual-Beam

| | | | | |
|--|-------------|------|--------|----|
| XXPol Panel 1710–2200 40° (–30°) 17dBi 2°–14°T | 80010605 | 698 | bottom | 84 |
| 1710–2200 40° (+30°) 17dBi 2°–14°T | | | | |
| XXPol Panel 1710–2200 45° (–30°) 19.5dBi 0°–10°T | 80010606v01 | 1314 | bottom | 85 |
| 1710–2200 45° (+30°) 19.5dBi 0°–10°T | | | | |

New or changed product

Abbreviations:

ESLS: Enhanced Side Lobe Suppression (above or below horizon)

HE: High Efficiency (Antennas with high gain compared to length)

Summary – Directional Antennas

Dual Polarization +45°/–45°

1800/1900/2000/2600

Antennas with integrated RET

| Type | Type No. | Height [mm] | Connector position | Page | | |
|----------------|-----------|-------------------|--------------------|------|--------|----|
| XPol Panel IRT | 1710–2200 | 65° 18dBi 0°–10°T | 80010618v01 | 1302 | bottom | 86 |

Tri-Sector Pipe Antenna

| | | | | | | |
|------------------------|-----------|---------------------|----------|------|--------|----|
| XPol Tri-Sector Pipe | 1710–2170 | 65° 15.5dBi 0°–12°T | 80010375 | 1241 | bottom | 87 |
| XPol Tri-Sector Pipe | 1710–2170 | 65° 18dBi 0°–10°T | 80010360 | 1823 | bottom | 88 |
| Flexible Sealing Frame | | | 85010010 | | | 89 |

**Further types on request.
Please contact:
mobilcom@kathrein.de**

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

30°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2170 30° 20dBi 0°–12°T

| Type No. | 80010251 v01 | | | clamps included |
|---|--|--|--|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 19.2 dBi | 2 x 19.5 dBi | 2 x 19.8 | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 36° | 35° | 33° | |
| Front-to-back ratio, copolar (180°±30°) | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | | | | |
| Maindirection 0° | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | |
| Sidelobe suppression | > 18 dB | > 17 dB | > 15 dB | |
| Tracking, Avg. | | 1.0 dB | | |
| Squint | | ±1.0° | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 9.2° | 9° | 8.5° | |
| Electrical tilt | 0°–12°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 6° ... 12° T 15 ... 17 ... 17 dB | 0° ... 6° ... 12° T 15 ... 17 ... 17 dB | 0° ... 6° ... 12° T 15 ... 17 ... 17 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 420 / 110 / 520 N | | | |
| Height/width/depth | 1032 / 299 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



XPoL Panel 1710–2170 30° 21dBi 0°–8°T

| Type No. | 742351 v01 | | | clamps included |
|---|--|---|---|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 20.2 dBi | 2 x 20.5 dBi | 2 x 20.7 | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 36° | 35° | 33° | |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | | | | |
| Maindirection 0° | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | |
| Sidelobe suppression | > 14 dB | > 14 dB | > 14 dB | |
| Tracking, Avg. | | 0.5 dB | | |
| Squint | | ±1.0° | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.4° | 7.0° | 6.7° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° T 18 ... 17 ... 16 dB | 0° ... 4° ... 8° T 18 ... 18 ... 17 dB | 0° ... 4° ... 8° T 18 ... 17 ... 16 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 540 / 135 / 640 N | | | |
| Height/width/depth | 1304 / 299 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 14 kg / 14 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

45°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2170 45° 19.5dBi 0°–8°T

| Type No. | 742218v01 | | | clamps included |
|---|---|---|---|-----------------|
| Frequency range | 1710–2170 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 19 dBi | 2 x 19.5 dBi | 2 x 19.6 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 47° | 45° | 44° | |
| Front-to-back ratio (180°±30°) | Copolar: > 27 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 27 dB Total power: > 25 dB | |
| Cross polar ratio | | | | |
| Maindirection 0° | Typically: 18 dB | Typically: 18 dB | Typically: 18 dB | |
| Sector ±30° | > 13 dB | > 13 dB | > 13 dB | |
| Sidelobe suppression | > 18 dB | > 18 dB | > 18 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.3° | 7.0° | 6.7° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 2° ... 5° ... 8° T 17 ... 17 ... 15 ... 15 dB | 0° ... 2° ... 5° ... 8° T 18 ... 18 ... 17 ... 17 dB | 0° ... 2° ... 5° ... 8° T 18 ... 18 ... 15 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 450 / 145 / 490 N | | | |
| Height/width/depth | 1306 / 199 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



1800/1900/200/2600
XPoL

XPoL Panel 1710–2170 45° 21.5dBi 0°–6°T

| Type No. | 742219v01 | | | clamps included |
|---|---|---|---|-----------------|
| Frequency range | 1710–2170 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 20.5 ... 20.6 ... 20.3 | 20.9 ... 21.1 ... 20.9 | 21 ... 21.4 ... 21 | |
| Tilt | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 48° | 45° | 44° | |
| Front-to-back ratio (180°±30°) | Copolar: > 28 dB Total power: > 25 dB | Copolar: > 27 dB Total power: > 25 dB | Copolar: > 25 dB Total power: > 25 dB | |
| Cross polar ratio | | | | |
| Maindirection 0° | Typically: 19 dB | Typically: 18 dB | Typically: 17 dB | |
| Sector ±30° | > 13 dB | > 13 dB | > 13 dB | |
| Sidelobe suppression | > 18 dB | > 18 dB | > 18 dB | |
| Tracking, Avg. | 1.0 dB | | | |
| Squint | ±2.0° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 4.7° | 4.5° | 4.4° | |
| Electrical tilt | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 16 ... 16 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 700 / 220 / 740 N | | | |
| Height/width/depth | 1946 / 199 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 14 kg / 16 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2170 65° 9dBi 0°T

| Type No. | 742210v01 | | |
|--|--|-----------------------------|-----------------------------|
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 8.5 dBi | 2 x 8.6 dBi | 2 x 8.7 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 70° | 68° | 65° |
| Front-to-back ratio, copolar | > 25 dB | > 30 dB | > 27 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±3.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 65° | 65° | 63° |
| Electrical tilt | 0°, fixed | 0°, fixed | 0°, fixed |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 150 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom or top | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 50 / 13 / 55 N | | |
| Height/width/depth | 155 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 1.5 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



XPoI Panel 1710–2170 65° 12dBi 2°T

| Type No. | 739489v01 | | |
|--|--|-----------------------------|-----------------------------|
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 11.5 dBi | 2 x 12 dBi | 2 x 12 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 65° | 63° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 27 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±1.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 32° | 30° | 28° |
| Electrical tilt | 3°, fixed | 2°, fixed | 0°, fixed |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 150 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 90 / 27 / 105 N | | |
| Height/width/depth | 342 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 2.2 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2690

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2690 65° 12dBi 4°T

| Type No. | 80010761 | | | |
|--|--|------------------------------|------------------------------|------------------------------|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 11 dBi | 2 x 11.5 dBi | 2 x 12.2 dBi | 2 x 12.7 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 65° | 60° | 58° |
| Front-to-back ratio, copolar | > 30 dB | > 28 dB | > 28 dB | > 28 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: > 20 dB > 8 dB | Typically: > 20 dB > 8 dB | Typically: > 20 dB > 8 dB | Typically: > 20 dB > 8 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 36° | 31° | 25° | 25° |
| Electrical tilt | 3°, fixed | 3°, fixed | 4°, fixed | 4°, fixed |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 28 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 150 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 75 / 17 / 75 N | | | |
| Height/width/depth | 278 / 154 / 69 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 0.4 kg (tension bands incl.) | | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | | |



1800/1900/200/2600
XPoI

XPoI Panel 1710–2170 65° 16dBi 0°T

| Type No. | 742196v01 | | |
|--|--|--|--|
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 15.3 dBi | 2 x 15.6 dBi | 2 x 15.8 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 66° | 64° |
| Front-to-back ratio (180°±30°) | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±1.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 12.6° | 11.8° | 11° |
| Sidelobe suppression for first sidelobe above horizon | > 14 dB | > 16 dB | > 14 dB |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom or top | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 185 / 65 / 220 N | | |
| Height/width/depth | 735 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 4.5 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2200 65° 15.5dBi 0°–12°T

| Type No. | 80010247v01 | | |
|---|---|---|---|
| | clamps included | | |
| | 1710–2200 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain per input (dBi) | 0° ... 4° ... 8° ... 12° T 15.5 ... 15.4 ... 15.3 ... 15.1 | 0° ... 4° ... 8° ... 12° T 15.6 ... 15.5 ... 15.4 ... 15.0 | 0° ... 4° ... 8° ... 12° T 15.8 ... 15.7 ... 15.5 ... 14.9 |
| Horizontal Pattern: | | | |
| Half-power beam width | 67° | 66° | 64° |
| Front-to-back ratio | Copolar: > 27 dB | Copolar: > 27 dB | Copolar: > 27 dB |
| Cross polar ratio | | | |
| Main direction | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB |
| Sector | ±60° > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 12.9° | 12.3° | 11.5° |
| Electrical tilt | 0°–12°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB | 0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB | 0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB |
| Impedance | 50 Ω | | |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 195 / 70 / 220 N | | |
| Height/width/depth | 735 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 4.5 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2690 65° 16.5dBi 0°–12°T

| Type No. | 80010681 | | | |
|--|--|--|--|--|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 2 x 15.5 dBi | 2 x 16.3 dBi | 2 x 16.7 dBi | 2 x 16.7 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 64° | 60° | 60° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 23 dB | > 23 dB |
| Cross polar ratio Sector 0° ±60° | Typically: 25 dB > 10 dB | Typically: 28 dB > 8 dB | Typically: 28 dB > 8 dB | Typically: 28 dB > 11 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 10.8° | 9.9° | 8.8° | 8.4° |
| Electrical tilt | 0°–12°, continuously adjustable | | | |
| Sidelobe suppression – for first sidelobe above main beam | 0° ... 6° ... 12° T ≥ 12 ... 13 ... 15 dB | 0° ... 6° ... 12° T ≥ 13 ... 14 ... 15 dB | 0° ... 6° ... 12° T ≥ 13 ... 14 ... 16 dB | 0° ... 6° ... 12° T ≥ 15 ... 15 ... 17 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 210 / 60 / 220 N | | | |
| Height/width/depth | 851 / 155 / 70 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 5 kg / 5.2 kg (clamps incl.) | | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | | |

clamps
included

1800/1900/200/2600
XPol



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2200 65° 18.3dBi 0°T

| Type No. | 80010425v01 | | | clamps included |
|--|--|-----------------------------|-----------------------------|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 17.9 dBi | 2 x 18.1 dBi | 2 x 18.3 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 66° | 64° | |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio Sector | 0° Typically: 20 dB ±60° > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 6.6° | 6.2° | 5.8° | |
| Electrical tilt | 0°, fixed | | | |
| Sidelobe suppression for first sidelobe above main beam | > 14 dB | > 15 dB | > 16 dB | |
| First null-fill below main beam | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| VSWR | < 1.4 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 115 / 390 N | | | |
| Height/width/depth | 1302 / 155 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



XPoL Panel 1710–2200 65° 18.3dBi 2°T

| Type No. | 80010426v01 | | | clamps included |
|--|--|-----------------------------|-----------------------------|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 17.9 dBi | 2 x 18.1 dBi | 2 x 18.3 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 66° | 65° | 63° | |
| Front-to-back ratio, copolar | > 28 dB | > 30 dB | > 33 dB | |
| Cross polar ratio Sector | 0° Typically: 20 dB ±60° > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 6.6° | 6.2° | 5.8° | |
| Electrical tilt | 2°, fixed | | | |
| Sidelobe suppression for first sidelobe above main beam | > 14 dB | > 15 dB | > 15 dB | |
| First null-fill below main beam | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| VSWR | < 1.4 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 115 / 390 N | | | |
| Height/width/depth | 1302 / 155 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200

X

65°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2200 65° 18dBi 6°T

| Type No. | 80010428v01 | | | clamps included |
|---|--|-----------------------------|-----------------------------|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain | 2 x 17.7 dBi | 2 x 17.9 dBi | 2 x 18.1 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 65° | 63° | |
| Front-to-back ratio, copolar | > 27 dB | > 33 dB | > 33 dB | |
| Cross polar ratio Sector 0° ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 6.7° | 6.3° | 5.8° | |
| Electrical tilt | 6°, fixed | | | |
| Sidelobe suppression for first sidelobe above main beam | > 14 dB | > 14 dB | > 15 dB | |
| First null-fill below main beam | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| VSWR | < 1.3 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 115 / 390 N | | | |
| Height/width/depth | 1302 / 155 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



1800/1900/200/2600
XPoL

XPoL Panel 1710–2170 65° 18dBi 0°–8°T

| Type No. | 742214v01 | | | clamps included |
|---|--|---|---|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain at 0° tilt | 2 x 17.5 dBi | 2 x 17.7 dBi | 2 x 18 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 66° | 64° | 62° | |
| Front-to-back ratio | Copolar: 30 dB | Copolar: 30 dB | Copolar: 30 dB | |
| Cross polar ratio Maindirection 0° Sector ±60° | Avg.: 25 dB > 10 dB | Avg.: 25 dB > 10 dB | Avg.: 28 dB > 10 dB | |
| Tracking, Avg. | 1.0 dB | | | |
| Squint | ±2.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 8.3° | 7.8° | 7.4° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above horizon, Avg. | 0° ... 4° ... 8° T 20 ... 20 ... 20 dB | 0° ... 4° ... 8° T 20 ... 20 ... 20 dB | 0° ... 4° ... 8° T 20 ... 20 ... 20 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 290 / 80 / 300 N | | | |
| Height/width/depth | 1142 / 155 / 70 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 4.5 kg / 6.5 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2200 65° 18dBi 0°–10°T

| Type No. | 742215v01 | | | clamps included |
|---|--|--|--|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain (dBi) | 17.7 ... 17.8 ... 17.6 | 18.0 ... 18.2 ... 17.9 | 18.1 ... 18.2 ... 18.0 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 66° | 64° | |
| Front-to-back ratio (180°±30°) | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Maindirection | 0° | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.1° | 6.8° | 6.4° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 90 / 340 N | | | |
| Height/width/depth | 1314 / 154 / 70 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 5.2 kg / 7.2 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



XPoL Panel 1710–2200 65° 18dBi 2°–10°T ESLS

| Type No. | 80010614v01 | | | clamps included |
|--|--|-----------------|-----------------|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain at 0° tilt | 2 x 17.3 dBi | 2 x 17.7 dBi | 2 x 18 | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 66° | 64° | 62° | |
| Front-to-back ratio (180°±30°) | ≥ 25 dB | ≥ 25 dB | ≥ 25 dB | |
| Cross polar ratio | 25 dB | 25 dB | 25 dB | |
| Sector | ±60° | ≥ 10 dB | ≥ 10 dB | ≥ 10 dB |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.9° | 7.5° | 7.2° | |
| Electrical tilt | 2°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | > 15 dB | > 17 dB | > 18 dB | |
| Sidelobe suppression in the sector 40°–180° below horizon for TX-Frequencies | > 23 dB | > 24 dB | > 25 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 90 / 340 N | | | |
| Height/width/depth | 1314 / 155 / 70 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS

| Type No. | 80010504v01 | | | |
|--|---|---|---|---|
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1880 – 1990 MHz | 1920 – 2170 MHz | 2000 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 2 x 17.5 dBi | 2 x 17.6 dBi | 2 x 17.7 dBi | 2 x 17.8 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 66° | 64° | 62° |
| Front-to-back ratio (180°±30°) | ≥ 25 dB | ≥ 25 dB | ≥ 25 dB | ≥ 25 dB |
| Cross polar ratio Sector 0° | 22 dB | 22 dB | 24 dB | 26 dB |
| Sector ±60° | ≥ 10 dB | ≥ 10 dB | ≥ 10 dB | ≥ 10 dB |
| Tracking, Avg. | 1.0 dB | | | |
| Squint | ±2.0° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.9° | 7.5° | 7.2° | 7.0° |
| Electrical tilt | 0°–15°, continuously adjustable | | | |
| Sidelobe suppression – for first sidelobe above main beam | 0° ... 5° ... 10° ... 15° T ≥ 17 ... 20 ... 18 ... 17 dB | 0° ... 5° ... 10° ... 15° T ≥ 16 ... 20 ... 18 ... 17 dB | 0° ... 5° ... 10° ... 15° T ≥ 16 ... 20 ... 18 ... 17 dB | 0° ... 5° ... 10° ... 15° T ≥ 15 ... 20 ... 18 ... 15 dB |
| – within 0°–20° sector above horizon | ≥ 16 ... 18 ... 18 ... 16 dB | ≥ 16 ... 18 ... 17 ... 16 dB | ≥ 15 ... 18 ... 17 ... 16 dB | ≥ 15 ... 16 ... 16 ... 15 dB |
| Null-fill at 0° tilt | 21 dB | 20 dB | 19 dB | 18 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 360 / 100 / 370 N | | | |
| Height/width/depth | 1387 / 155 / 69 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 6.5 kg / 8.5 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps
included

1800/1900/200/2600
XPol



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS

| Type No. | 80010621 v01 | | | |
|--------------------------------------|--|------------------------|------------------------|------------------------|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 17.4 ... 17.4 ... 17.3 | 18.2 ... 18.0 ... 17.9 | 18.2 ... 18.1 ... 17.7 | 18.3 ... 18.0 ... 17.6 |
| Tilt | 0° ... 6° ... 12° | 0° ... 6° ... 12° | 0° ... 6° ... 12° | 0° ... 6° ... 12° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 64° | 61° | 60° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Sector | 0° | 0° | 0° | 0° |
| | ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.0 dB | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.1° | 6.5° | 5.9° | 5.7° |
| Electrical tilt | 0°–12°, continuously adjustable | | | |
| Sidelobe suppression | 0° ... 6° ... 12° T | 0° ... 6° ... 12° T | 0° ... 6° ... 12° T | 0° ... 6° ... 12° T |
| – for first sidelobe above main beam | ≥ 18 ... 18 ... 18 dB | ≥ 18 ... 18 ... 18 dB | ≥ 18 ... 18 ... 18 dB | ≥ 18 ... 18 ... 18 dB |
| – within 0°–20° sector above horizon | ≥ 17 ... 17 ... 16 dB | ≥ 17 ... 17 ... 16 dB | ≥ 16 ... 18 ... 17 dB | ≥ 17 ... 17 ... 17 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind loa (at 150 km/h) | Frontal / lateral / rearside: 370 / 135 / 420 N | | | |
| Height/width/depth | 1410 / 164 / 70 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 6.5 kg / 8.5 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

clamps included

1800/1900/200/2600 XPol



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2200 65° 19.5dBi 0°–6°T

| Type No. | 742213v01 | | | clamps included |
|--|---|---|---|-----------------|
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 19 dBi | 2 x 19.2 dBi | 2 x 19.5 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 65° | 63° | |
| Front-to-back ratio (180°±30°) | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±2.0° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 4.7° | 4.5° | 4.3° | |
| Electrical tilt | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 16 ... 15 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 510 / 140 / 510 N | | | |
| Height/width/depth | 1954 / 155 / 70 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 9 kg / 11 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



1800/1900/200/2600
XPol

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS

| Type No. | 80010505v01 | | | |
|--------------------------------------|--|------------------------------|------------------------------|------------------------------|
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1880 – 1990 MHz | 1920 – 2170 MHz | 2000 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Average Gain (dBi) | 18.5 ... 18.7 ... 18.5 | 18.7 ... 19.0 ... 18.5 | 18.7 ... 19.0 ... 18.4 | 18.7 ... 18.9 ... 18.3 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 65° | 64° | 63° |
| Front-to-back ratio (180°±30°) | ≥ 30 dB | ≥ 30 dB | ≥ 27 dB | ≥ 26 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 22 dB | Typically: 22 dB | Typically: 22 dB |
| Sector | 0° ±60° | ≥ 11 dB | ≥ 11 dB | ≥ 10 dB |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±2.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 5.0° | 4.8° | 4.6° | 4.4° |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression | 0° ... 4° ... 8° ... 10° T | 0° ... 4° ... 8° ... 10° T | 0° ... 4° ... 8° ... 10° T | 0° ... 4° ... 8° ... 10° T |
| – for first sidelobe above main beam | ≥ 20 ... 20 ... 18 ... 18 dB | ≥ 20 ... 20 ... 18 ... 18 dB | ≥ 19 ... 20 ... 18 ... 18 dB | ≥ 18 ... 20 ... 18 ... 18 dB |
| – within 0°–20° sector above horizon | ≥ 18 ... 18 ... 17 ... 17 dB | ≥ 17 ... 18 ... 17 ... 15 dB | ≥ 17 ... 17 ... 17 ... 15 dB | ≥ 17 ... 17 ... 14 ... 12 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 520 / 190 / 630 N | | | |
| Height/width/depth | 1984 / 155 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps included

1800/1900/200/2600
XPol



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

62°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2200 62° 19dBi 0°–8°T

| Type No. | 80010636 | | | clamps included |
|--|--|---|---|-----------------|
| Frequency range | 1710 – 1880 MHz | 1710–2200 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 18.3 dBi | 2 x 18.7 dBi | 2 x 19 | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 62° | 59° | |
| Front-to-back ratio (180°±30°) | > 30 dB | > 30 dB | > 28 dB | |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 6.6° | 6.2° | 5.9° | |
| Electrical tilt | 0°–8°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° T 18 ... 14 ... 14 dB | 0° ... 4° ... 8° T 18 ... 15 ... 15 dB | 0° ... 4° ... 8° T 18 ... 15 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 360 / 100 / 370 N | | | |
| Height/width/depth | 1407 / 155 / 70 mm | | | |
| Category of mounting hardware | L (Light) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



1800/1900/200/2600
XPol

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2690 65° 19dBi 0°–6°T

| Type No. | 80010651 | | | |
|--|--|---|---|---|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2170 MHz | 2170 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 2 x 18.5 dBi | 2 x 19.0 dBi | 2 x 19.4 dBi | 2 x 19.5 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 63° | 60° | 58° |
| Front-to-back ratio (180°±30°) | > 28 dB | > 28 dB | > 25 dB | > 25 dB |
| Cross polar ratio Sector 0° Sector ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 28 dB > 10 dB |
| Tracking, Avg. | 1.5 dB | | | |
| Squint | ±3° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 5.4° | 4.9° | 4.3° | 4.0° |
| Electrical tilt | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 17 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 1x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 430 / 115 / 440 N | | | |
| Height/width/depth | 1670 / 155 / 70 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 7 kg / 9 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

clamps
included

1800/1900/200/2600
XPol



Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2200 65° 21dBi 0°T

| Type No. | 80010439v01 | | | |
|--|--|-----------------|-----------------|-----------------|
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2000 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 20.5 dBi | 2 x 20.8 dBi | 2 x 21.1 dBi | 2 x 21.2 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 66° | 63° | 60° | 58° |
| Front-to-back ratio (180°±30°) | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Sector 0° | 25 dB | 23 dB | 23 dB | 23 dB |
| Sector ±60° | > 12 dB | > 12 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±1.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 4.2° | 4° | 3.7° | 3.6° |
| Electrical tilt | 0°, fixed | | | |
| Sidelobe suppression – for first sidelobe above main beam – within 0°–30° sector above horizon | > 15 dB > 15 dB | | | |
| First null-fill below main beam | < 20 dB | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female | | | |
| Connector position | Bottom or top | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 550 / 210 / 610 N | | | |
| Height/width/depth | 2172 / 155 / 89 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 11.5 kg / 13.5 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps included



1800/1900/200/2600
XPoI

XPoI Panel 1710–2200 62° 21.2dBi 0°–6°T

| Type No. | 80010378 | | |
|--|--|---|---|
| | 1710–2200 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 20.6 dBi | 2 x 21.1 dBi | 2 x 21.2 |
| Horizontal Pattern: | | | |
| Half-power beam width | 65° | 62° | 60° |
| Front-to-back ratio (180°±30°) | > 30 dB | > 28 dB | > 28 dB |
| Cross polar ratio Sector 0° | 25 dB | 23 dB | 23 dB |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.0 dB | | |
| Squint | ±2.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 3.7° | 3.5° | 3.3° |
| Electrical tilt | 0°–6°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 17 ... 17 ... 17 dB |
| Null-fill at 0° tilt | 20 dB | 20 dB | 20 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 660 / 260 / 730 N | | |
| Height/width/depth | 2548 / 155 / 89 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 13 kg / 15 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |

clamps included



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

90°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2170 90° 11.5dBi

| Type No. | 741984v01 | | |
|--|--|--|--|
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 11.3 dBi | 2 x 11.5 dBi | 2 x 11.6 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 86° | 87° | 88° |
| Front-to-back ratio (180°±30°) | Copolar: > 23 dB Total power: > 23 dB | Copolar: > 23 dB Total power: > 23 dB | Copolar: > 23 dB Total power: > 23 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 20 dB > 18 dB | Typically: 25 dB > 18 dB | Typically: 20 dB > 15 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±3.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 28° | 26° | 26° |
| Sidelobe suppression vertical sector ±45° | > 20 dB | > 20 dB | > 20 dB |
| VSWR | < 1.4 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 150 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom or top | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 90 / 27 / 105 N | | |
| Height/width/depth | 342 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 2 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



XPol Panel 1710–2170 90° 14dBi 0°–10°T

| Type No. | 741988v01 | | |
|--|--|--|--|
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 13.7 dBi | 2 x 14 dBi | 2 x 14.1 |
| Horizontal Pattern: | | | |
| Half-power beam width | 88° | 88° | 88° |
| Front-to-back ratio, copolar total power | > 25 dB > 25 dB | > 25 dB > 25 dB | > 25 dB > 25 dB |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±3.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 14.7° | 14° | 13° |
| Electrical tilt | 0°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB | 0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 175 / 65 / 200 N | | |
| Height/width/depth | 662 / 155 / 69 mm | | |
| Category of mounting hardware | L (Light) | | |
| Weight | 4.2 kg (tension bands incl.) | | |
| Scope of supply | Panel and 1 unit of tension bands for 45 – 125 mm diameter | | |



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200

X

90°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2200 90° 17dBi 0°–8°T

| Type No. | 741989v01 | | |
|--|---|---|---|
| | <i>clamps included</i> | | |
| | 1710–2200 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 16.5 dBi | 2 x 16.8 dBi | 2 x 16.7 |
| Horizontal Pattern: | | | |
| Half-power beam width | 88° | 88° | 88° |
| Front-to-back ratio (180°±30°) | Copolar: > 25 dB Total power: > 25 dB | Copolar: > 25 dB Total power: > 25 dB | Copolar: > 24 dB Total power: > 24 dB |
| Cross polar ratio Maindirection Sector 0° ±60° | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.0° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7° | 6.7° | 6.5° |
| Electrical tilt | 0°–8°, continuously adjustable | | |
| Sidelobe supression for first sidelobe above main beam | 0° ... 2° ... 5° ... 8° T 18 ... 18 ... 16 ... 14 dB | 0° ... 2° ... 5° ... 8° T 20 ... 20 ... 18 ... 17 dB | 0° ... 2° ... 5° ... 8° T 18 ... 18 ... 18 ... 17 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 350 / 125 / 400 N | | |
| Height/width/depth | 1302 / 155 / 69 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 7.5 kg / 9.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



1800/1900/200/2600
XPoI

XPoI Panel 1710–2170 90° 18dBi 0°–6°T

| Type No. | 741990v01 | | |
|--|---|---|---|
| | <i>clamps included</i> | | |
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 17.7 dBi | 2 x 18 dBi | 2 x 18.2 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 88° | 88° | 88° |
| Front-to-back ratio, copolar total power | > 25 dB > 25 dB | > 25 dB > 25 dB | > 25 dB > 25 dB |
| Cross polar ratio Maindirection Sector 0° ±60° | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | ±2.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 4.9° | 4.7° | 4.5° |
| Electrical tilt | 0°–6°, continuously adjustable | | |
| Sidelobe supression for first sidelobe above main beam | 0° ... 2° ... 4° ... 6° T 17 ... 17 ... 17 ... 17 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB | 0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 1 x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 510 / 185 / 610 N | | |
| Height/width/depth | 1942 / 155 / 69 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |



Dual-Beam Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2200 | 1710–2200 |
| X | X |
| 40° | 40° |

KATHREIN
Antennen · Electronic



XXPol Panel 1710–2200/1710–2200 40°(–30°)/40°(+30°) 17/17dBi 2°–14°/2°–14°T

| | | | | |
|---|--|---|---|-----------------|
| Type No. | 80010605 | | | clamps included |
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Azimuth direction | Beam A (–30°), Beam B (+30°) | | | |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | |
| Gain | 2° ... 7° ... 14° T 16.5 ... 16.5 ... 16.2 dBi | 2° ... 7° ... 14° T 17.0 ... 16.8 ... 16.5 dBi | 2° ... 7° ... 14° T 17.5 ... 17.4 ... 16.8 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width (offset beams ±30°) | 43° | 40° | 37° | |
| Front-to-back ratio | Copolar: > 30 dB Total power: > 25 dB | | | |
| Cross polar ratio | | | | |
| Main direction –30°; +30° Sector –60°; 0°; 0°; +60° | Typically: 15 dB > 8 dB | Typically: 15 dB > 8 dB | Typically: 15 dB > 8 dB | |
| Sidelobe suppression for sidelobes beside main beam | > 18 dB | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 14.5° | 14° | 13° | |
| Electrical tilt | 2°–14°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | > 16 dB | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 28 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 200 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 400 / 115 / 450 N | | | |
| Height/width/depth | 698 / 380 / 150 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 12 kg / 14 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |




1800/1900/200/2600
XXPol


1710 – 1880 MHz

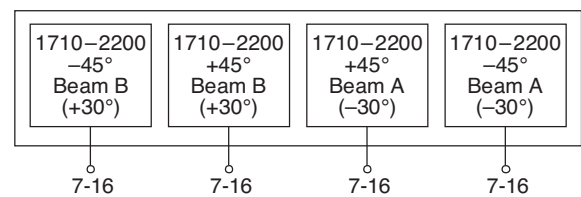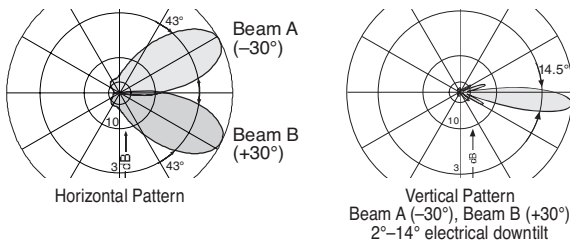

1850 – 1990 MHz

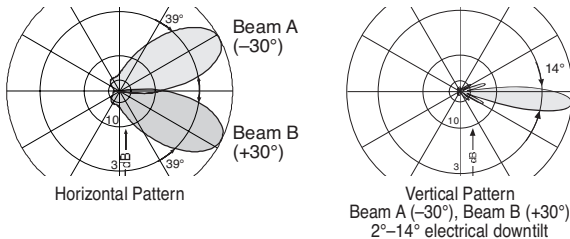

1920 – 2200 MHz

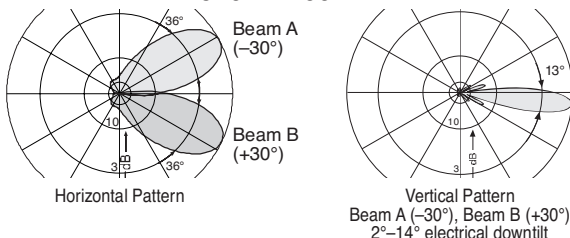

Dual-Beam Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2200 | 1710–2200 |
| X | X |
| 45° | 45° |



KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 45°(–30°)/45°(+30°) 19.5/19.5dBi 0°–10°/0°–10°T

| | | | | |
|---|--|------------------------|------------------------|-----------------|
| Type No. | 80010606v01 | | | clamps included |
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Azimuth direction | Beam A (–30°), Beam B (+30°) | | | |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | |
| Gain | 4 x 19 dBi | 4 x 19.3 dBi | 4 x 19.5 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width (offset beams ±30°) | 47° | 41° | 43° | |
| Front-to-back ratio | Copolar: > 30 dB Total power: > 25 dB | | | |
| Cross polar ratio | | | | |
| Main direction –30°; +30° | Typically: 18 dB | Typically: 17 dB | Typically: 16 dB | |
| Sector –60°; 0°; 0°; +60° | > 13 dB | > 13 dB | > 13 dB | |
| Sidelobe suppression for sidelobes beside main beam | > 18 dB | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.2° | 7.1° | 6.8° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | > 18 dB | | | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 200 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 710 / 200 / 820 N | | | |
| Height/width/depth | 1314 / 380 / 150 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 19 kg / 21 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |



1800/1900/200/2600
XXPol

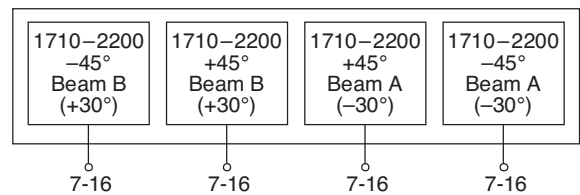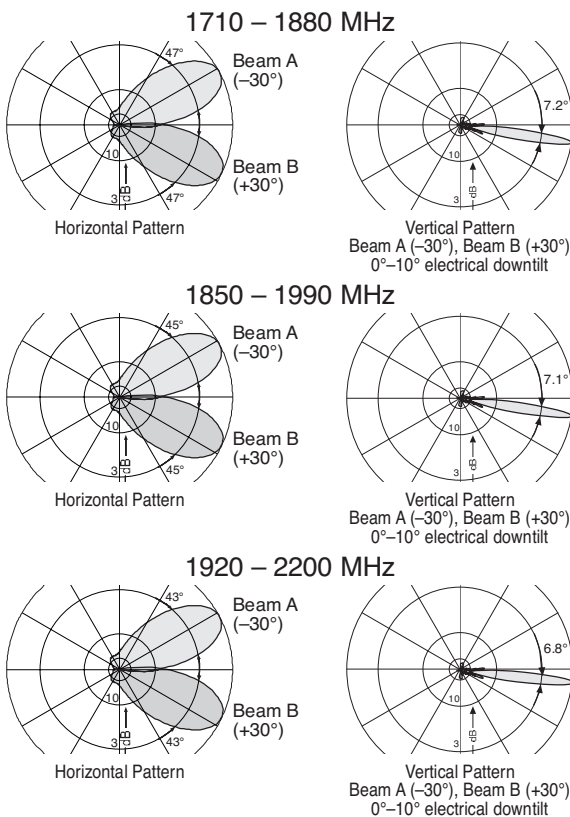

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°


KATHREIN
Antennen · Electronic

XPol Panel IRT 1710–2200 65° 18dBi 0°–10°T

| | | | | |
|---|--|--|--|-----------------------------|
| Type No. | 80010618v01 | | | <i>clamps included</i> |
| A) Antenna specifications | | | | |
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain | 2 x 17.7 dBi | 2 x 17.9 dBi | 2 x 18 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 66° | 65° | |
| Front-to-back ratio | Copolar: > 30dB Total power: > 25 dB | Copolar: > 30dB Total power: > 25 dB | Copolar: > 30dB Total power: > 25 dB | |
| Cross polar ratio | | | | |
| Main direction | 0° | | | |
| Sector | ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.1° | 6.8° | 6.6° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | > 15 dB | > 17 dB | > 18 dB | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 10° T 16 ... 16 ... 16 ... 16 dB | 0° ... 4° ... 8° ... 10° T 17 ... 17 ... 17 ... 17 dB | 0° ... 4° ... 8° ... 10° T 17 ... 17 ... 17 ... 17 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 120 W (at 50 °C ambient temperature) | | | |
| Input | 2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female | | | |
| Connector position | Bottom | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 330 / 115 / 390 N | | | |
| Height/width/depth | 1302 / 155 / 69 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 7.5 kg / 9.5 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps 42 – 115 mm diameter | | | |



| | |
|--|--|
| B) iRCU specifications | 80010618v01 |
| Logical interface ex factory ¹⁾ | 3GPP/AISG 2.0 |
| Protocols | Compliant to AISG 1.1 and 3GPP/AISG 2.0 |
| Hardware interface ²⁾ | 2 x 8pin connector acc. IEC 60130-9; according to AISG: – iRCU in (male): Control / Daisy chain in – iRCU out (female): Daisy chain out |
| Power supply | 10 ... 30 V |
| Power consumption | < 1 W (stand by) < 8.5 W (motor activated) |
| Adjustment time (full range) | 40 sec. |
| Adjustment cycles | > 50,000 |

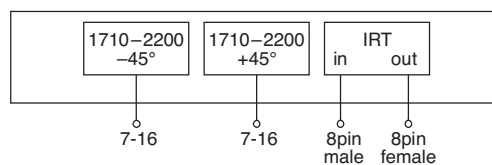

¹⁾ The protocol of the logical interface can be switched from AISG 1.1 to 3GPP/AISG 2.0 and vice versa with a vendor specific command. Start-up operation of the 80010314v01 is only possible with a primary station supporting AISG 1.1 and start-up operation of the 80010618v01 is only possible with a primary station supporting 3GPP/AISG 2.0!
Please note: The used Primary-SW has to be able to handle also integrated remote tilt units, like Kathrein CCU with firmware 1.29 or higher and the Kathrein PCA with SW 2.0 or higher. If the Primary of the system doesn't support the standard of the 'logical interface ex factory', the IRT must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.

²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

| | | | | |
|---------------------------------|------------------|------------------|------------------|--|
| Tri-Sector Pipe Antenna | 0° | 120° | 240° | KATHREIN Antennen · Electronic |
| Frequency Range | 1710–2170 | 1710–2170 | 1710–2170 | |
| Dual Polarization | X | X | X | |
| Half-power Beam Width | 65° | 65° | 65° | |
| Adjust. Electr. Downtilt | 0°–12° | 0°–12° | 0°–12° | |


set by hand or by optional RCUs (Remote Control Units)

XPol Tri-Sector Pipe 1710–2170 65° 15.5dBi 0°–12°T

| Type No. | 80010375 | | | Electrical datas per sector |
|---|---|---|---|-----------------------------|
| Frequency range | 1710–2170 | | | |
| | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain per Input (dBi) | 0° ... 4° ... 8° ... 12° T 15.4 ... 15.2 ... 15.0 ... 14.8 | 0° ... 4° ... 8° ... 12° T 15.5 ... 15.4 ... 15.3 ... 14.9 | 0° ... 4° ... 8° ... 12° T 15.7 ... 15.6 ... 15.4 ... 14.9 | |
| Half-power beam width Copolar +45°/–45° | Horizontal: 67° Vertical: 12.7° | Horizontal: 65° Vertical: 12° | Horizontal: 62° Vertical: 11.2° | |
| Electrical tilt continuously adjustable | 0°–12° | 0°–12° | 0°–12° | |
| Sidelobe suppression for first sidelobe above horizon | 0° ... 4° ... 8° ... 12° T 16 ... 16 ... 15 ... 15 dB | 0° ... 4° ... 8° ... 12° T 18 ... 17 ... 17 ... 16 dB | 0° ... 4° ... 8° ... 12° T 18 ... 18 ... 16 ... 16 dB | |
| Front-to-back ratio | Copolar: > 25 dB | Copolar: > 25 dB | Copolar: > 25 dB | |
| Cross polar ratio Maindirection Sector | 0° ±60° Typically: 20 dB Typically: > 10 dB | Typically: 20 dB Typically: > 10 dB | Typically: 20 dB Typically: > 10 dB | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | |
| Isolation: Intersystem | > 40 dB | > 40 dB | > 40 dB | |
| Impedance | 50 Ω | 50 Ω | 50 Ω | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | | |



1800/1900/200/2600
XPol

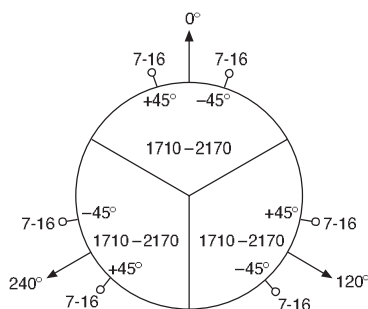

| Mechanical specifications | |
|----------------------------------|---|
| Input | 3 x 2 x 7-16 female |
| Connector position | Bottom – inside service area |
| Adjustment mechanism | 3 x 1, Position bottom continuously adjustable inside service area |
| Weight | 32 kg |
| Wind load | 205 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Natural frequency | 45 – 47 Hz |
| Damping ratio | 0.032 |
| Mechanical interface | Flange connection 12 x 12M at a graduated diameter of 208 mm 0°–360° continuously adjustable (for further details see application note) |
| Packing size | 1395 x 315 x 330 mm |
| Height / diameter | 1241 / 230 and 280 mm |

Tri-Sector Pipe Antenna

Frequency Range

Dual Polarization

Half-power Beam Width

Adjust. Electr. Downtilt

0°

120°

240°

1710–2170

1710–2170

1710–2170

X

X

X

65°

65°

65°

0°–10°

0°–10°

0°–10°

set by hand or by optional RCUs (Remote Control Units)

KATHREIN


Antennen · Electronic

XPol Tri-Sector Pipe 1710–2170 65° 18dBi 0°–10°T

| Type No. | 80010360 | | | Electrical datas per sector |
|---|--|--|--|-----------------------------|
| Frequency range | 1710–2170 | | | |
| | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 17.2 ... 17.5 ... 17.2 | 17.6 ... 17.8 ... 17.6 | 17.8 ... 17.9 ... 17.4 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | |
| Half-power beam width | Horizontal: 66° | Horizontal: 63° | Horizontal: 60° | |
| Copolar +45°/–45° | Vertical: 7° | Vertical: 6.7° | Vertical: 6.4° | |
| Electrical tilt continuously adjustable | 0°–10° | 0°–10° | 0°–10° | |
| Sidelobe suppression for first sidelobe above horizon | 0° ... 5° ... 10° T 17 ... 15 ... 15 dB | 0° ... 5° ... 10° T 17 ... 17 ... 15 dB | 0° ... 5° ... 10° T 17 ... 17 ... 15 dB | |
| Front-to-back ratio (180° ± 30°) | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | |
| Cross polar ratio | | | | |
| Maindirection | 0° | | | |
| Sector | ±60° | | | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | |
| Isolation: Intersystem | > 45 dB | > 42 dB | > 42 dB | |
| Impedance | 50 Ω | 50 Ω | 50 Ω | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |



compact service area

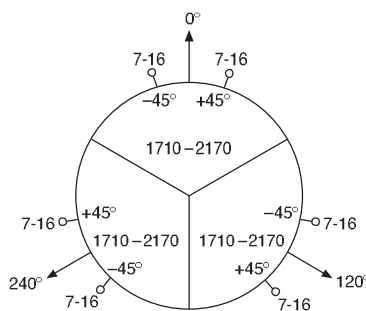

Mechanical specifications

| | |
|----------------------|---|
| Input | 3 x 2 x 7-16 female |
| Connector position | Bottom – inside service area |
| Adjustment mechanism | 3 x 1, Position bottom continuously adjustable inside service area |
| Weight | 56 kg |
| Wind load | 320 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Natural frequency | 19 – 21 Hz |
| Damping ratio | 0.032 |
| Mechanical interface | Flange connection 12 x 12M at a graduated diameter of 208 mm 0°–360° continuously adjustable (for further details see application note) |
| Packing size | 2030 x 400 x 400 mm |
| Height / diameter | 1823 / 230 and 280 mm |

Accessories delivered with the Tri-Sector-Pipe Antenna:

1. Clamping ring for mounting the antenna on the customer-supplied base
2. Lightning conductor rod
3. Ring bolt as attachment possibility for lifting aid
4. Wrench (SW41 + SW27) for attaching the RCU


Optional Accessories:

The following components may be ordered separately

- | | |
|-------------|--|
| 1. 86010147 | Remote Control Unit (RCU) |
| 86010148 | |
| 2. 85010010 | Flexible Sealing Frame (Roxtec frame to seal connection between the mast and the antenna, see below) |
| 3. 738440 | Azimuth Adjustment Tool, see page 220 |
| 4. 86010103 | 3-way power splitter for optional omni pattern |

Flexible Sealing Frame

| Type No. | 85010010 |
|----------------------------|--|
| Outer diameter | 180 mm |
| Cable diameter (6x) | 15 – 42 mm |
| Cable diameter (3x) | 3.5 – 10.5 mm |
| Frame-Material | Stainless steel |
| Sealing-Material | Halogen free cross linkable compound on ethylene-propylene rubber (EPDM) |
| Material of screws | Stainless steel |
| Accessories | Mounting lubricant |
| Required assembly tools | Socket wrench size 6 mm |
| Weight (without packaging) | 1.8 kg |
| Packing size (L x W x H) | approx. 208 x 208 x 68 mm |

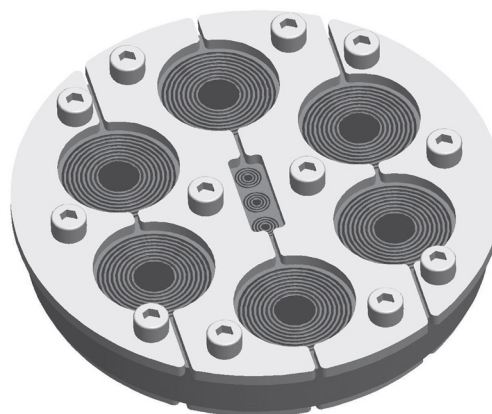

For further information
please refer to separate application note under:
www.kathrein.de/en/mcs/index.htm



Summary – Directional Antennas 2-Multi-band 1800/1900/2000/2600

Dual Polarization +45°/–45°

| Type | Type No. | Height [mm] | Connector position | Page |
|--|-----------------|-------------|--------------------|------|
| XXPol Panel 1710–2170 65° 15dBi 0°–10°T 1710–2170 65° 15dBi 0°–10°T | 742233v01 | 679 | bottom | 92 |
| XXPol Panel 1710–2690 65° 16.5dBi 0°–12°T 1710–2690 65° 16.5dBi 0°–12°T | 80010682 | 855 | bottom | 93 |
| XXPol Panel 1710–1880 65° 17.5dBi 2°–10°T 1920–2170 60° 18dBi 2°–10°T | 80010744 | 1410 | bottom | 94 |
| XXPol Panel 1710–2170 65° 18dBi 0°–8°T 1710–2170 65° 18dBi 0°–8°T | 742237 | 1147 | bottom | 94 |
| XXPol Panel 1710–2170 65° 18dBi 0°–10°T 2490–2690 60° 18dBi 0°–10°T | 80010644 | 1410 | bottom | 95 |
| XXPol Panel 1710–2200 65° 18dBi 0°–10°T 1710–2200 65° 18dBi 0°–10°T | 742236v01 | 1319 | bottom | 95 |
| XXPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS 1710–2690 65° 18dBi 0°–12°T | 80010622 | 1415 | bottom | 96 |
| XXPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS 1710–2200 65° 18dBi 0°–15°T | 80010510v01 | 1389 | bottom | 97 |
| XXPol Panel 1710–2170 65° 19.5dBi 0°–6°T 1710–2170 65° 19.5dBi 0°–6°T | 742235v01 | 1959 | bottom | 98 |
| XXPol Panel 1710–2690 65° 19dBi 0°–10°T 1710–2690 65° 19dBi 0°–10°T | 80010652 | 1688 | bottom | 99 |
| XXPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS 1710–2200 65° 19dBi 0°–10°T | 80010511v01 | 1999 | bottom | 100 |
| XXPol Panel 1710–2180 90° 16.5dBi 0°–10°T 1710–2180 90° 16.5dBi 0°–10°T | 742352v01 | 1319 | bottom | 101 |

New or changed product

When deploying
2-Multi-band Antennas,
please also consider using
special Dual-band Combiners
(see pages 240 and 241)

Abbreviations:

ESLS: Enhanced Side Lobe Suppression (above or below horizon)

2-Multi-band Panel

Dual Polarization

Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2170 | 1710–2170 |
|-----------|-----------|

| | |
|---|---|
| X | X |
|---|---|



| | |
|-----|-----|
| 65° | 65° |
|-----|-----|

KATHREIN

Antennen · Electronic

XXPol Panel 1710–2170/1710–2170 65°/65° 15/15dBi 0°–10°/0°–10°T

| Type No. | 742233v01 | | | clamps included |
|---|--|--|--|-----------------|
| Frequency range | 1710–2170 | | | |
| | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | |
| Gain | 4 x 15 dBi | 4 x 15.2 dBi | 4 x 15.3 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 67° | 65° | 62° | |
| Front-to-back ratio | Copolar: > 25 dB Total power: > 25 dB | Copolar: > 25 dB Total power: > 25 dB | Copolar: > 25 dB Total power: > 25 dB | |
| Cross polar ratio | | | | |
| Main direction | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB | |
| Sector | ±60° Typically: 10 dB | Typically: 10 dB | Typically: 10 dB | |
| Vertical Pattern: | | | | |
| Half-power beam width | 14° | 13.7° | 13° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 10° T 16 ... 16 ... 15 ... 15 dB | 0° ... 4° ... 8° ... 10° T 16 ... 16 ... 16 ... 16 dB | 0° ... 4° ... 8° ... 10° T 16 ... 16 ... 16 ... 16 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 350 / 85 / 370 N | | | |
| Height/width/depth | 679 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

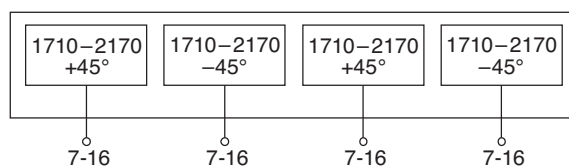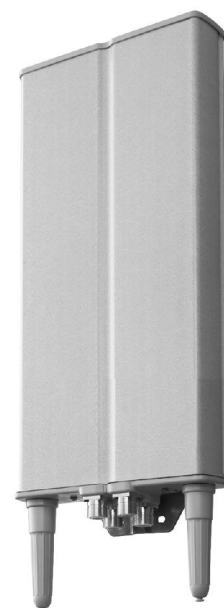

Multi-band Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2690 | 1710–2690 |
| X | X |
| 65° | 65° |



KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 16.5/16.5dBi 0°–12°/0°–12°T

| Type No. | 80010682 | | | |
|--|--|--|--|--|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 4 x 15.8 dBi | 4 x 16.2 dBi | 4 x 16.6 dBi | 4 x 16.7 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 64° | 60° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 28 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Sector | 0° ±60° | > 8 dB | > 8 dB | > 10 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 11° | 10° | 9° | 8.7° |
| Electrical tilt | 0°–12°, continuously adjustable | | | |
| Sidelobe supression for first sidelobe above main beam | 0° ... 6° ... 12° T ≥ 12 ... 13 ... 15 dB | 0° ... 6° ... 12° T ≥ 13 ... 14 ... 16 dB | 0° ... 6° ... 12° T ≥ 13 ... 15 ... 16 dB | 0° ... 6° ... 12° T ≥ 15 ... 15 ... 17 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 440 / 100 / 460 N | | | |
| Height/width/depth | 855 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 11 kg / 13 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps included

180019002002600
XXPol 2-Port

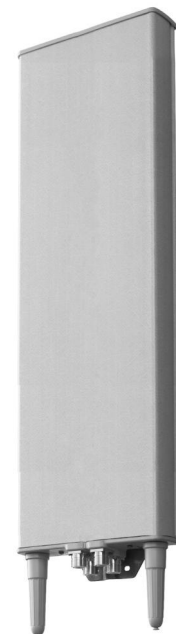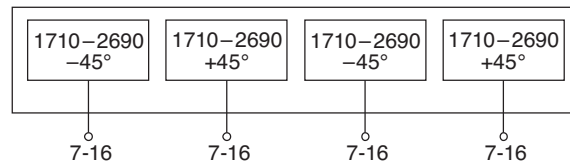

Multi-band Panel Dual Polarization Half-power Beam Width

1710...(1880)...2170

1710...(1920)...2170

KATHREIN

Antennen · Electronic

X

X

65°

60°

XXPol Panel 1710–1880/1920–2170 65°/60° 17.5/18dBi 2°–10°/2°–10°T


| Type No. | 80010744 | |
|---|--|--|
| | clamps included | |
| | 1710–1880 | 1920–2170 |
| Frequency range | 1710 – 1880 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° |
| Gain | 2 x 17.5 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | |
| Half-power beam width | 65° | 59° |
| Front-to-back ratio (180°±30°) | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 28 dB Total power: > 25 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB |
| Main direction | 0° | 0° |
| Sector | ±60° | ±60° |
| Tracking, Avg. | 0.5 dB | 0.5 dB |
| Squint | ±1.5° | ±1.5° |
| Vertical Pattern: | | |
| Half-power beam width | 6.6° | 5.9° |
| Electrical tilt, continuously adjustable | 2°–10° | 2°–10° |
| Sidelobe suppression for first sidelobe above main beam | 2° ... 6° ... 10° T 18 ... 16 ... 16 dB | 2° ... 6° ... 10° T 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | < 1.5 |
| Isolation: Intrasystem | > 30 dB | > 30 dB |
| Isolation: Intersystem | > 30 dB | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc |
| Max. power per input | 200 W* | 200 W* |
| Input | 4 x 7-16 female | |
| Connector position | Bottom | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 370 / 145 / 370 N | |
| Height/width/depth | 1410 / 155 / 89 mm | |
| Category of mounting hardware | M (Medium) | |
| Weight | 10 kg / 12 kg (clamps incl.) | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | |

* (at 50 °C ambient temperature)



XXPol Panel 1710–2170/1710–2170 65°/65° 18/18dBi 0°–8°/0°–8°T

| Type No. | 742237 | | |
|---|--|---|---|
| | clamps included | | |
| | 1710–2170 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° |
| Gain | 4 x 17.5 dBi | 4 x 17.7 dBi | 4 x 18 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 65° | 63° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Avg.: 25 dB | Avg.: 25 dB | Avg.: 25 dB |
| Main direction | 0° | 0° | 0° |
| Sector | ±60° | ±60° | ±60° |
| Vertical Pattern: | | | |
| Half-power beam width | 8.3° | 8° | 7.5° |
| Electrical tilt | 0°–8°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam, Avg. | 0° ... 4° ... 8° T 20 ... 20 ... 18 dB | 0° ... 4° ... 8° T 20 ... 20 ... 18 dB | 0° ... 4° ... 8° T 20 ... 20 ... 18 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 590 / 135 / 610 N | | |
| Height/width/depth | 1147 / 323 / 71 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 12.5 kg / 14.5 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |

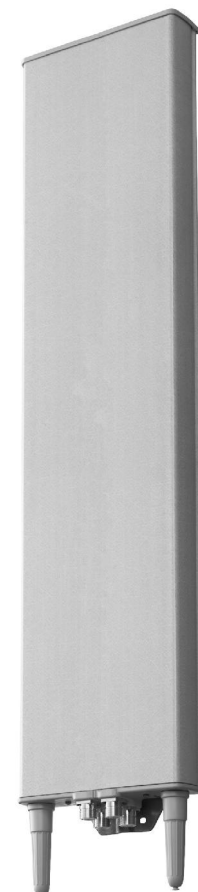

Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200 1710...(2490)...2690

X X

65° 65°

KATHREIN

Antennen · Electronic

XXPol Panel 1710–2170/2490–2690 65°/60° 18/18dBi 0°–10°/0°–10°T

| Type No. | 80010644 | | |
|--|--|--|--|
| | 1710–2180 | | 2490–2690 |
| Frequency range | 1710 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain at 0° tilt | 2 x 17.5 dBi | 2 x 17.7 dBi | 2 x 18.0 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 68° | 65° | 61° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio Sector 0° | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| ±60° | > 8 dB | > 8 dB | > 10 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 6.7° | 6.3° | 5.4° |
| Electrical tilt, continuously adjustable | 0°–10° | | 0°–10° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB |
| VSWR | < 1.5 | | < 1.5 |
| Isolation: Intrasystem | > 30 dB | | > 30 dB |
| Isolation: Intersystem | > 29 dB | | > 29 dB |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | < –150 dBc (2 x 43 dBm carrier) |
| Max. power per input | 200 W* | | 200 W* |
| Total power | 400 W* | | 400 W* |
| Input | 4 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 370 / 145 / 400 N | | |
| Height/width/depth | 1410 / 155 / 89 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 10 kg / 12 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |

clamps included



1800/1900/200/2600
XXPol 2-Unit

XXPol Panel 1710–2200/1710–2200 65°/65° 18/18dBi 0°–10°/0°–10°T

| Type No. | 742236v01 | | |
|--|--|--|--|
| | 1710–2200 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2200 MHz |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° |
| Gain | 4 x 17.6 dBi | 4 x 17.8 dBi | 4 x 18 dBi |
| Horizontal Pattern: | | | |
| Half-power beam width | 64° | 64° | 62° |
| Front-to-back ratio | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB |
| Cross polar ratio Maindirection 0° | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| ±60° Sector | > 10 dB | > 10 dB | > 10 dB |
| Vertical Pattern: | | | |
| Half-power beam width | 7° | 6.8° | 6.5° |
| Electrical tilt | 0°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 20 ... 18 ... 16 dB | 0° ... 5° ... 10° T 20 ... 18 ... 16 dB | 0° ... 5° ... 10° T 16 ... 18 ... 16 dB |
| VSWR | < 1.5 | | |
| Isolation, between ports | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 660 / 155 / 690 N | | |
| Height/width/depth | 1319 / 323 / 71 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 15 kg / 17 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |

clamps included



Multi-band Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2690 | 1710–2690 |
| X | X |
| 65° | 65° |


KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 18/18dB 0°–12°/0°–12°T ESLS

| Type No. | 80010622 | | | |
|--|--|--|--|--|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 17.4 ... 17.4 ... 17.3 | 17.8 ... 17.6 ... 17.5 | 18.0 ... 17.9 ... 17.5 | 18.0 ... 17.7 ... 17.3 |
| Tilt | 0° ... 6° ... 12° | 0° ... 6° ... 12° | 0° ... 6° ... 12° | 0° ... 6° ... 12° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 65° | 61° | 61° |
| Front-to-back ratio (180°±30°) | > 25 dB, avg. 28 dB | > 26 dB, avg. 28 dB | > 25 dB, avg. 27 dB | > 25 dB, avg. 27 dB |
| Cross polar ratio Sector 0° ±60° | Typically: 30 dB > 10 dB | Typically: 30 dB > 10 dB | Typically: 25 dB > 8 dB | Typically: 25 dB > 10 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.1° | 6.5° | 5.9° | 5.7° |
| Electrical tilt | 0°–12°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB | 0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB | 0° ... 6° ... 12° T ≥ 18 ... 17 ... 17 dB | 0° ... 6° ... 12° T ≥ 18 ... 18 ... 17 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 720 / 165 / 740 N | | | |
| Height/width/depth | 1415 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps included

1800/1900/200/2600
XXPol 2-Multi

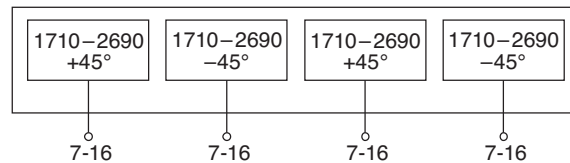

Multi-band Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2200 | 1710–2200 |
| X | X |
| 65° | 65° |


KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 65°/65° 18/18dBi 0°–15°/0°–15°T ESLS

| Type No. | 80010510v01 | | | |
|--------------------------------------|--|------------------------------|------------------------------|------------------------------|
| | 1710–2200 | | | |
| Frequency range | 1710 – 1880 MHz | 1880 – 1990 MHz | 1920 – 2170 MHz | 2000 – 2200 MHz |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° |
| Gain at 0° tilt | 4 x 17.5 dBi | 4 x 17.6 dBi | 4 x 17.7 dBi | 4 x 17.8 dBi |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 63° | 62° | 62° |
| Front-to-back ratio (180°±30°) | ≥ 30 dB | ≥ 30 dB | ≥ 30 dB | ≥ 28 dB |
| Cross polar ratio | 0° | 0° | 0° | 0° |
| Sector | ±60° | ±60° | ±60° | ±60° |
| Vertical Pattern: | | | | |
| Half-power beam width | 7.9° | 7.5° | 7.2° | 7.0° |
| Electrical tilt | 0°–15°, continuously adjustable | | | |
| Sidelobe suppression | 0° ... 5° ... 10° ... 15° T | 0° ... 5° ... 10° ... 15° T | 0° ... 5° ... 10° ... 15° T | 0° ... 5° ... 10° ... 15° T |
| – for first sidelobe above main beam | ≥ 17 ... 20 ... 18 ... 17 dB | ≥ 16 ... 20 ... 18 ... 18 dB | ≥ 15 ... 19 ... 18 ... 17 dB | ≥ 14 ... 18 ... 18 ... 16 dB |
| – within 0°–20° sector above horizon | ≥ 16 ... 18 ... 18 ... 16 dB | ≥ 16 ... 17 ... 17 ... 16 dB | ≥ 15 ... 17 ... 17 ... 16 dB | ≥ 14 ... 16 ... 16 ... 15 dB |
| Null-fill at 0° tilt | 23 dB | 22 dB | 21 dB | 20 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 700 / 160 / 720 N | | | |
| Height/width/depth | 1389 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 17 kg / 19 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps included

180019002002600
XXPol 2x-Unit

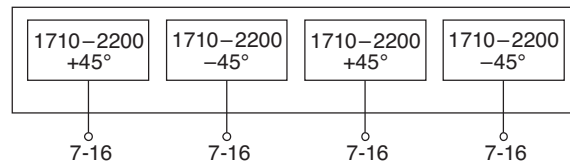

2-Multi-band Panel

Dual Polarization

Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2170 | 1710–2170 |
|-----------|-----------|

| | |
|---|---|
| X | X |
|---|---|


| | |
|-----|-----|
| 65° | 65° |
|-----|-----|

KATHREIN

Antennen · Electronic

XXPol Panel 1710–2170/1710–2170 65°/65° 19.5/19.5dBi 0°–6°/0°–6°T

| Type No. | 742235v01 | | | clamps included |
|---|---|---|---|-----------------|
| | 1710–2170 | | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | |
| Gain | 4 x 19 dBi | 4 x 19.2 dBi | 4 x 19.5 dBi | |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 64° | 63° | |
| Front-to-back ratio | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 25 dB | Copolar: > 30 dB Total power: > 24 dB | |
| Cross polar ratio | | | | |
| Main direction | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Sector | ±60° | > 10 dB | > 10 dB | |
| Tracking, Avg. | 0.5 dB | | | |
| Squint | ±2.5° | | | |
| Vertical Pattern: | | | | |
| Half-power beam width | 4.6° | 4.4° | 4.2° | |
| Electrical tilt | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 2° ... 4° ... 6° T 17 ... 17 ... 14 ... 14 dB | 0° ... 2° ... 4° ... 6° T 17 ... 17 ... 15 ... 15 dB | 0° ... 2° ... 4° ... 6° T 17 ... 17 ... 15 ... 15 dB | |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1010 / 220 / 1040 N | | | |
| Height/width/depth | 1959 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

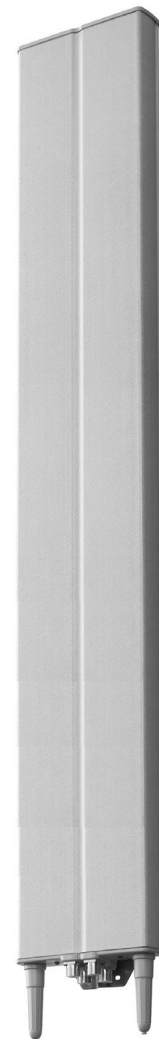

**Multi-band Panel
Dual Polarization
Half-power Beam Width**

| | |
|-----------|-----------|
| 1710–2690 | 1710–2690 |
| X | X |
| 65° | 65° |


KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 19/19dBi 0°–10°/0°–10°T

| Type No. | 80010652 | | | |
|--|--|--|--|--|
| | 1710–2690 | | | |
| Frequency range | 1710 – 1990 MHz | 1920 – 2200 MHz | 2200 – 2490 MHz | 2490 – 2690 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 18.2 ... 18.4 ... 18.0 | 18.7 ... 18.9 ... 18.4 | 18.8 ... 19.0 ... 18.3 | 18.7 ... 19.0 ... 18.3 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 65° | 65° | 62° | 63° |
| Front-to-back ratio, copolar | > 30 dB | > 26 dB | > 28 dB | > 26 dB |
| Cross polar ratio Sector 0° ±60° | Typically: 22 dB > 10 dB | Typically: 22 dB > 10 dB | Typically: 22 dB > 10 dB | Typically: 20 dB > 10 dB |
| Vertical Pattern: | | | | |
| Half-power beam width | 5.5° | 5.0° | 4.3° | 4.0° |
| Electrical tilt | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB | 0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB | 0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB | 0° ... 5° ... 10° T ≥ 18 ... 15 ... 15 dB |
| VSWR | < 1.5 | | | |
| Isolation, between ports | > 30 dB | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 830 / 320 / 880 N | | | |
| Height/width/depth | Approx. 1668 / 323 / 71 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

clamps
included

1800/1900/200/2600
XXPol 2-Unit

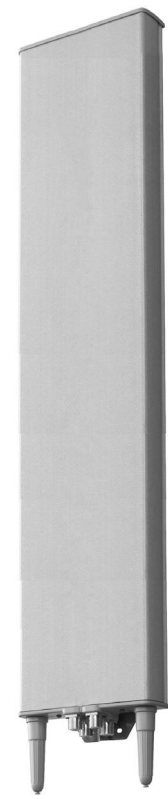


Multi-band Panel Dual Polarization Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2200 | 1710–2200 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 65°/65° 19/19dBi 0°–10°/0°–10°T ESLS

| | | | | | |
|--|--|--|--|--|------------------------|
| Type No. | 80010511v01 | | | | clamps included |
| | 1710–2200 | | | | |
| Frequency range | 1710 – 1880 MHz | 1880 – 1990 MHz | 1920 – 2170 MHz | 2000 – 2200 MHz | |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | |
| Gain (dBi) | 18.5 ... 18.7 ... 18.5 | 18.7 ... 19.0 ... 18.5 | 18.7 ... 19.0 ... 18.4 | 18.7 ... 18.9 ... 18.3 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 66° | 65° | 65° | 63° | |
| Front-to-back ratio (180°±30°) | ≥ 30 dB | ≥ 30 dB | ≥ 30 dB | ≥ 28 dB | |
| Cross polar ratio Sector 0° ±60° | Typically: 22 dB ≥ 10 dB | Typically: 22 dB ≥ 10 dB | Typically: 22 dB ≥ 10 dB | Typically: 22 dB ≥ 10 dB | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 5.0° | 4.8° | 4.6° | 4.4° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | | |
| Sidelobe suppression – for first sidelobe above main beam – within 0°–20° sector above horizon | 0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 18 ... 18 ... 17 ... 17 dB | 0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 17 ... 18 ... 17 ... 15 dB | 0° ... 4° ... 8° ... 10° T ≥ 19 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 17 ... 15 dB | 0° ... 4° ... 8° ... 10° T ≥ 18 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 14 ... 12 dB | |
| VSWR | < 1.5 | | | | |
| Isolation, between ports | > 30 dB | | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1020 / 230 / 1080 N | | | | |
| Height/width/depth | 1999 / 323 / 71 mm | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |

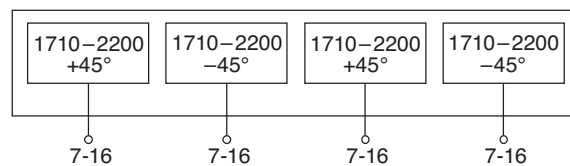

2-Multi-band Panel

Dual Polarization

Half-power Beam Width

| | |
|-----------|-----------|
| 1710–2180 | 1710–2180 |
|-----------|-----------|

| | |
|---|---|
| X | X |
|---|---|


| | |
|-----|-----|
| 90° | 90° |
|-----|-----|

KATHREIN


Antennen · Electronic

XXPol Panel 1710–2180/1710–2180 90°/90° 16.5/16.5dBi 0°–10°/0°–10°T

| Type No. | 742352v01 | | |
|---|--|--|--|
| | clamps included | | |
| | 1710–2180 | | |
| Frequency range | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° | +45°, –45°; +45°, –45° |
| Gain (average) | 16.1 ... 16.3 ... 16.0 dBi | 16.2 ... 16.4 ... 16.1 dBi | 16.5 ... 16.7 ... 16.2 dBi |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| Horizontal Pattern: | | | |
| Half-power beam width | 88° | 90° | 88° |
| Front-to-back ratio | Copolar: > 24 dB Total power: > 24 dB | Copolar: > 24 dB Total power: > 24 dB | Copolar: > 24 dB Total power: > 24 dB |
| Cross polar ratio | | | |
| Maindirection | 0° | | |
| Sector | ±60° | | |
| | Typically: 15 dB > 8 dB | Typically: 15 dB > 7.5 dB | Typically: 15 dB > 7 dB |
| Tracking, Avg. | 0.5 dB | | |
| Squint | 2.5° | | |
| Vertical Pattern: | | | |
| Half-power beam width | 7.4° | 7° | 6.5° |
| Electrical tilt | 0°–10°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 8° ... 10° T 18 ... 17 ... 16 ... 15 dB | 0° ... 4° ... 8° ... 10° T 18 ... 17 ... 16 ... 15 dB | 0° ... 4° ... 8° ... 10° T 17 ... 17 ... 16 ... 15 dB |
| VSWR | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | |
| Isolation: Intersystem | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 300 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | |
| Connector position | Bottom | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 660 / 155 / 690 N | | |
| Height/width/depth | 1319 / 323 / 71 mm | | |
| Category of mounting hardware | M (Medium) | | |
| Weight | 17 kg / 19 kg (clamps incl.) | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | |

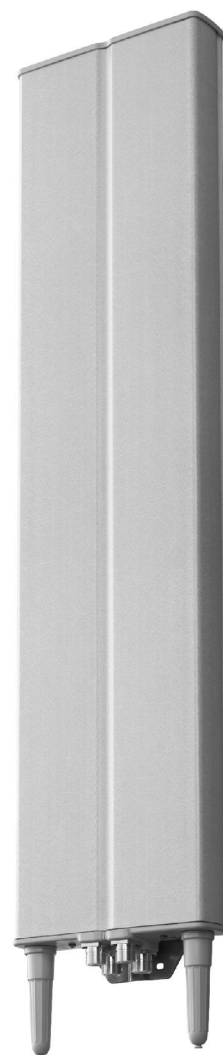

1800/1900/200/2600
XXPol 2-Unit

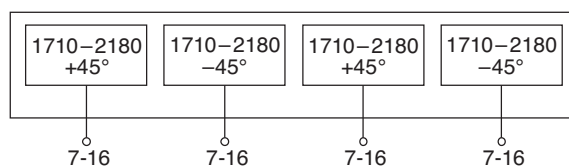

Summary – Directional Antennas

Dual-band

800/900 – 1800/2000/2600

Dual Polarization +45°/-45°

| Type | Type No. | Height [mm] | Connector position | Page |
|--|-----------------|-------------|--------------------|------|
| XXPol Panel 806–960 C 65° 8.5dBi 0°T 1710–2180 60° 9.5dBi 0°T | 80010454v01 | 270 | bottom or top | 104 |
| XXPol Panel 790–960 65° 12dBi 0°T 1710–2170 60° 14dBi 0°T | 742226v01 | 579 | bottom or top | 105 |
| XXPol Panel 790–960 C 65° 12dBi 0°T 1710–2170 60° 14dBi 0°T | 742222v01 | 579 | bottom or top | 106 |
| XXPol Panel 790–960 65° 14.5dBi 0°–14°T 1710–2180 65° 17.5dBi 0°–8°T | 742264v02 | 1334 | bottom | 107 |
| XXPol Panel 790–960 C 65° 14.5dBi 0°–14°T 1710–2180 65° 17.5dBi 0°–8°T | 742223v02 | 1334 | bottom | 108 |
| XXPol Panel 790–960 65° 15dBi 0°–16°T 1710–2690 65° 17.5dBi 2°–10°T | 80010664 | 1399 | bottom | 109 |
| XXPol Panel 790–960 65° 16dBi 0°–10°T 1710–2180 65° 18.5dBi 0°–6°T | 742265v02 | 1933 | bottom | 110 |
| XXPol Panel 790–960 65° 16dBi 0°–10°T 1710–2180 65° 18.5dBi 0°–6°T | 80010771 | 1934 | rearside | 111 |
| XXPol Panel 790–960 65° 16.5dBi 2°–14°T 1710–2180 65° 18.5dBi 4°–10°T | 80010485v01 | 2038 | bottom | 112 |
| XXPol Panel 790–960 C 65° 16dBi 0°–10°T 1710–2180 65° 18.5dBi 0°–6°T | 742224v02 | 1933 | bottom | 113 |
| XXPol Panel 790–960 65° 16dBi 0°–10°T 1710–2690 65° 18.5dBi 0°–6°T | 80010665 | 1997 | bottom | 114 |
| XXPol Panel 790–960 65° 17dBi 0°–7°T 1710–2180 65° 18.5dBi 0°–6°T | 742266v02 | 2533 | bottom | 115 |
| XXPol Panel 790–960 65° 17dBi 0°–8°T 1710–2180 65° 18.5dBi 0°–6°T | 80010772 | 2399 | rearside | 116 |
| XXPol Panel 790–960 65° 17dBi 0°–10°T 1710–2690 65° 18.5dBi 0°–6°T | 80010666 | 2622 | bottom | 117 |
| XXPol Panel 790–960 65° 17.5dBi 4°–12°T 1710–2180 65° 18.5dBi 4°–14°T | 80010486v01 | 2516 | bottom | 118 |
| XXPol Panel 790–960 C 65° 17dBi 0°–7°T 1710–2180 65° 18.5dBi 0°–6°T | 742225v02 | 2533 | bottom | 119 |
| XXPol Panel 790–960 90° 13.5dBi 0°–13°T 1710–2180 90° 16.5dBi 0°–10°T | 80010121v01 | 1384 | bottom | 120 |
| XXPol Panel 790–960 90° 15.2dBi 0°–10°T 1710–2180 90° 18dBi 0°–6°T | 80010122v01 | 1917 | bottom | 121 |
| XXPol Panel 790–960 90° 16.5dBi 0°–7°T 1710–2180 90° 18dBi 0°–6°T | 80010123v03 | 2635 | bottom | 122 |

C = integrated Combiner

New or changed product

*When deploying
Dual-band Antennas,
please also consider using
special Dual-band Combiners
(see pages 240 and 241)*

800/900 – 500
1800/2000/2600
XXPol


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 806–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 806–960/1710–2180 C 65°/65° 8.5/9.5dBi

| Type No. | 80010454v01 | | | | | | clamps included |
|--|--|------------------------------------|------------------------------------|--------------------------------------|------------------------------------|------------------------------------|-----------------|
| | 806–960 | | | 1710–2180 | | | |
| Frequency range | 806 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain | 2 x 8.5 dBi | 2 x 8.5 dBi | 2 x 8.5 dBi | 2 x 9.5 dBi | 2 x 9.5 dBi | 2 x 9.5 dBi | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 67° | 67° | 65° | 60° | 63° | 68° | |
| Front-to-back ratio [dB] | Copolar: > 25 Total power: > 20 | Copolar: > 25 Total power: > 20 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | |
| Cross polar ratio Maindirection Sector | 0° Typically: 25 dB ±60° > 10 dB | Typically: 25 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 20 dB > 10 dB | Typically: 19 dB > 10 dB | Typically: 20 dB > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 68° | 68° | 69° | 64° | 62° | 60° | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power | 250 W (at 50 °C ambient temperature) | | | 100 W (at 50 °C ambient temperature) | | | |
| Max. power per combined input | 350 W (at 50 °C ambient temperature) | | | | | | |
| Input | 2 x 7-16 female | | | | | | |
| Connector position | Bottom or top | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 95 / 35 / 130 N | | | | | | |
| Height/width/depth | 270 / 262 / 116 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 4.5 kg / 6.5 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | | | |

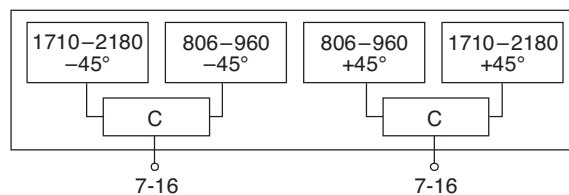

Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2170 |
| X | X |
| 65° | 65° |



KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2170 65°/60° 12/14dBi 0°/0°T

| Type No. | 742226v01 | | | | | |
|--|--|------------------------------------|------------------------------------|--------------------------------------|------------------------------------|------------------------------------|
| | 790–960 | | | 1710–2170 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 11.1 dBi | 2 x 11.4 dBi | 2 x 11.8 dBi | 2 x 12.8 dBi | 2 x 13.3 dBi | 2 x 13.6 dBi |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 66° | 60° | 60° |
| Front-to-back ratio [dB] (180°±30°) | Copolar: > 23 Total power: > 20 | Copolar: > 23 Total power: > 20 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 16 dB > 10 dB | Typically: 18 dB > 10 dB | Typically: 20 dB > 10 dB |
| Tracking, Avg. | 1.0 dB | | | 0.5 dB | | |
| Squint | ±3.0° | | | ±1.5° | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 34° | 33° | 30° | 20° | 18° | 17.5° |
| Electrical tilt | 0°, fixed | | | 0°, fixed | | |
| VSWR | < 1.5 | | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | |
| Isolation: Intersystem | > 42 dB (790–960 // 1710–2170 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power | 250 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | | | | |
| Connector position | Bottom or top | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 200 / 90 / 250 N | | | | | |
| Height/width/depth | 579 / 262 / 139 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 7.5 kg / 9.5 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

clamps included

800/900 -
1800/2000/2600
XXPol

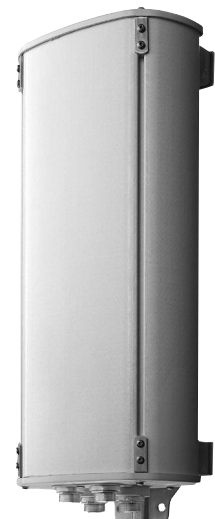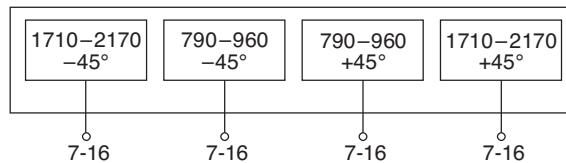

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2170 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2170 C 65°/60° 12/14dBi 0°/0°T

| Type No. | 742222v01 | | | | | |
|--|--|------------------------------------|------------------------------------|--------------------------------------|------------------------------------|------------------------------------|
| | 790–960 | | | 1710–2170 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 11.1 dBi | 2 x 11.4 dBi | 2 x 11.8 dBi | 2 x 12.5 dBi | 2 x 13.3 dBi | 2 x 13.6 dBi |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 66° | 60° | 60° |
| Front-to-back ratio [dB] (180°±30°) | Copolar: > 23 Total power: > 20 | Copolar: > 23 Total power: > 20 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 | Copolar: > 25 Total power: > 22 |
| Cross polar ratio Maindirection Sector | 0° Typically: 25 dB ±60° > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 18 dB > 10 dB | Typically: 18 dB > 10 dB | Typically: 20 dB > 10 dB |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 34° | 33° | 30° | 20° | 18° | 17.5° |
| Electrical tilt | 0°, fixed | | | 0°, fixed | | |
| VSWR | < 1.5 | | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power | 250 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | |
| Input | 2 x 7-16 female | | | | | |
| Connector position | Bottom or top | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 200 / 90 / 250 N | | | | | |
| Height/width/depth | 579 / 262 / 139 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 7.5 kg / 9.5 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | | |

clamps
included

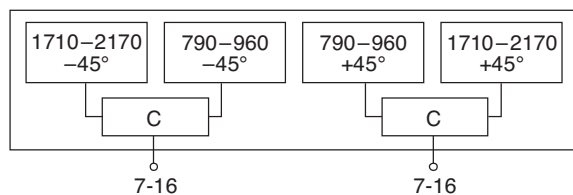

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 14.5/17.5dBi 0°–14°/0°–8°T

| Type No. | 742264v02 | | | | | |
|--|--|--|--|---|---|---|
| | 790–960 | | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 14.1 ... 14.1 ... 13.7 | 14.3 ... 14.2 ... 13.8 | 14.5 ... 14.4 ... 13.9 | 17.1 ... 17.3 ... 17.1 | 17.2 ... 17.4 ... 17.1 | 17.3 ... 17.5 ... 17.2 |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 65° | 62° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 32 dB | > 32 dB | > 32 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Main direction 0° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.0 dB | | | 0.5 dB | | |
| Squint | ±2.0° | | | ±3.0° | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 16.5° | 16° | 15.3° | 7.4° | 7.1° | 6.7° |
| Electrical tilt | 0°–14°, continuously adjustable | | | 0°–8°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 7° ... 14° T 17 ... 16 ... 15 dB | 0° ... 7° ... 14° T 19 ... 18 ... 18 dB | 0° ... 7° ... 14° T 17 ... 18 ... 17 dB | 0° ... 4° ... 8° T 17 ... 17 ... 16 dB | 0° ... 4° ... 8° T 15 ... 15 ... 15 dB | 0° ... 4° ... 8° T 16 ... 16 ... 15 dB |
| VSWR | < 1.5 | | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | |
| Isolation: Intersystem | > 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 560 / 260 / 600 N | | | | | |
| Height/width/depth | 1334 / 261 / 146 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 15.5 kg / 17.5 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

clamps included

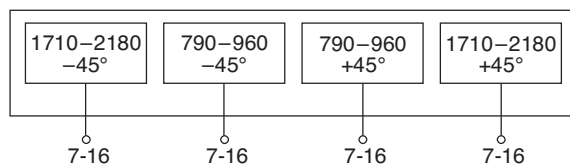

800/900 -
1800/2100/2600
XXPol

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 C 65°/65° 14.5/17.5dBi 0°–14°/0°–8°T

| Type No. | 742223v02 | | | | |
|--|--|--|---|---|---|
| | 790–960 | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 14.1 ... 14.1 ... 13.7 | 14.5 ... 14.4 ... 13.9 | 17.1 ... 17.3 ... 17.1 | 17.2 ... 17.4 ... 17.1 | 17.3 ... 17.5 ... 17.2 |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 65° | 62° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 32 dB | > 32 dB | > 32 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Main direction | 0° | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.0 dB | | 0.5 dB | | |
| Squint | ±2.0° | | ±3.0° | | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 16.5° | 15.3° | 7.4° | 7.1° | 6.7° |
| Electrical tilt | 0°–14°, continuously adjustable | | 0°–8°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 7° ... 14° T 17 ... 16 ... 15 dB | 0° ... 7° ... 14° T 17 ... 18 ... 17 dB | 0° ... 4° ... 8° T 17 ... 17 ... 16 dB | 0° ... 4° ... 8° T 15 ... 15 ... 15 dB | 0° ... 4° ... 8° T 16 ... 16 ... 15 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 250 W* | | 200 W* | | |
| Total power per combined input | 450 W* | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 560 / 260 / 600 N | | | | |
| Height/width/depth | 1334 / 261 / 146 mm | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 15.5 kg / 17.5 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |

clamps included

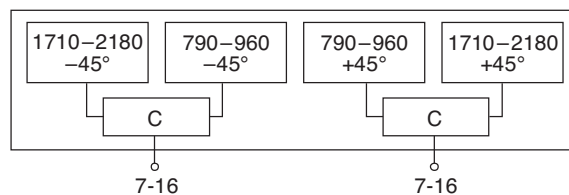

* (at 50 °C ambient temperature)


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2690 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 15/17.5dBi 0°–16°/2°–10°T

| Type No. | 80010664 | | | | | | | clamps included |
|---|--|--|--|--|--|--|--|-----------------|
| | 790–960 | | | 1710–2690 | | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 14.5 ... 14.4 ... 14.2 | 14.6 ... 14.5 ... 14.3 | 14.8 ... 14.6 ... 14.4 | 17.2 ... 17.3 ... 16.8 | 17.4 ... 17.4 ... 16.9 | 17.6 ... 17.7 ... 17.0 | 17.2 ... 17.3 ... 16.7 | |
| Tilt | 0° ... 8° ... 16° | 0° ... 8° ... 16° | 0° ... 8° ... 16° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 69° | 68° | 67° | 63° | 64° | 66° | 65° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 28 dB | > 28 dB | > 25 dB | |
| Cross polar ratio | | | | | | | | |
| Main direction 0° | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 18 dB | 20 dB | 20 dB | 23 dB | |
| Sector ±60° | > 10 dB | > 9 dB | > 8 dB | > 9 dB | > 10 dB | > 10 dB | > 8 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 16.5° | 16.0° | 15.5° | 6.2° | 5.8° | 5.2° | 4.8° | |
| Electrical tilt | 0°–16°, continuously adjustable | | | 2°–10°, continuously adjustable | | | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 8° ... 16° T 16 ... 15 ... 15 dB | 0° ... 8° ... 16° T 16 ... 15 ... 15 dB | 0° ... 8° ... 16° T 15 ... 15 ... 14 dB | 2° ... 5° ... 10° T 14 ... 15 ... 16 dB | 2° ... 5° ... 10° T 14 ... 15 ... 17 dB | 2° ... 5° ... 10° T 15 ... 16 ... 17 dB | 2° ... 5° ... 10° T 15 ... 17 ... 18 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | < 30 dB | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 650 / 240 / 700 N | | | | | | | |
| Height/width/depth | 1399 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | | |
| Weight | 18 kg / 20 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

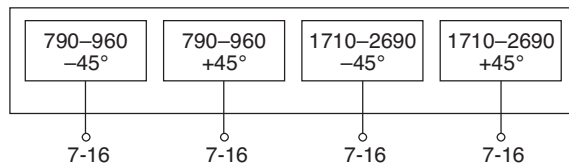

800/900 -
1800/2000/2600
XXPol


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16/18.5dBi 0°–10°/0°–6°T

| Type No. | 742265v02 | | | | | | clamps included |
|--|--|---|---|---|---|---|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain (dBi) | 15.6 ... 15.5 ... 15.3 | 15.9 ... 15.8 ... 15.5 | 16.1 ... 16.0 ... 15.6 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 | |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 65° | 65° | 61° | |
| Front-to-back ratio, copolar | > 27 dB | > 28 dB | > 28 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Main direction 0° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Tracking, Avg. | 1.5 dB | | | 0.5 dB | | | |
| Squint | ±2.5° | | | ±2.5° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 10.9° | 10.6° | 10° | 5.0° | 4.8° | 4.6° | |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0.5° ... 5° ... 9.5° T ≥ 15 ... 16 ... 17 dB | 0.5° ... 5° ... 9.5° T ≥ 15 ... 17 ... 19 dB | 0.5° ... 5° ... 9.5° T ≥ 15 ... 18 ... 19 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | |
| VSWR | < 1.5 | | | < 1.5 | | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | | |
| Isolation: Intersystem | > 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 850 / 380 / 910 N | | | | | | |
| Height/width/depth | 1933 / 261 / 146 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 20 kg / 22 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

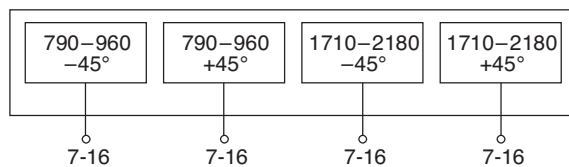


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16/18.5dBi 0°–10°/0°–6°T

| Type No. | 80010771 | | | | | | clamps included |
|--|--|--|--|---|---|---|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain (dBi) | 15.4 ... 15.5 ... 15.2 | 15.5 ... 15.8 ... 15.3 | 15.8 ... 16.0 ... 15.4 | 18.3 ... 18.5 ... 18.2 | 18.5 ... 18.7 ... 18.3 | 18.2 ... 18.6 ... 18.2 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 69° | 67° | 65° | 65° | 62° | 62° | |
| Front-to-back ratio, copolar | > 27 dB | > 28 dB | > 28 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Maindirection 0° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Tracking, Avg. | 1.5 dB | | | 0.5 dB | | | |
| Squint | ±3.0° | | | ±2.5° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 11° | 10.7° | 10° | 5.0° | 4.8° | 4.6° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | 0°–6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 5° ... 10° ≥ 17 ... 17 ... 17 dB | 0° ... 5° ... 10° ≥ 17 ... 17 ... 18 dB | 0° ... 5° ... 10° ≥ 17 ... 17 ... 16 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | < 1.5 | < 1.5 | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Max. power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female | | | | | | |
| Connector position | Rearside | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rear: 680 / 380 / 890 N | | | | | | |
| Height/width/depth | 1934 / 260 / 140 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 15 kg / 17 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

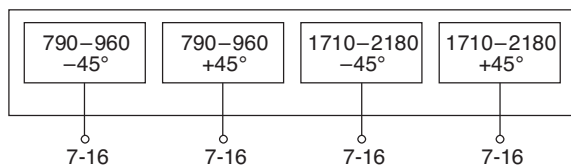

800/900 - 1800/2100/2600 XXPol


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16.5/18.5dBi 2°–14°/4°–10°T

| Type No. | 80010485v01 | | | | | | clamps included |
|---|--|--|--|--|--|--|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.2 ... 16.0 ... 15.7 | 16.3 ... 16.1 ... 15.8 | 16.4 ... 16.2 ... 15.8 | 18.0 ... 18.2 ... 17.7 | 18.4 ... 18.5 ... 17.8 | 18.7 ... 18.6 ... 18.0 | |
| Tilt | 2° ... 8° ... 14° | 2° ... 8° ... 14° | 2° ... 8° ... 14° | 4° ... 9° ... 14° | 4° ... 9° ... 14° | 4° ... 9° ... 14° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 66° | 64° | 60° | |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 20 dB | Typically: 20 dB | Typically: 21 dB | |
| Main direction | 0° | | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 10° | 9.7° | 9.3° | 5° | 4.7° | 4.5° | |
| Electrical tilt | 2°–14°, continuously adjustable | | | 4°–14°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 2° ... 8° ... 14° T 17 ... 17 ... 15 dB | 2° ... 8° ... 14° T 17 ... 17 ... 16 dB | 2° ... 8° ... 14° T 17 ... 17 ... 16 dB | 4° ... 9° ... 14° T 20 ... 18 ... 15 dB | 4° ... 9° ... 14° T 19 ... 18 ... 15 dB | 4° ... 9° ... 14° T 18 ... 17 ... 15 dB | |
| Impedance | 50 Ω | | | | | | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Isolation: Intersystem | > 35 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 800 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 750 / 380 / 900 N | | | | | | |
| Height/width/depth | 2038 / 262 / 139 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

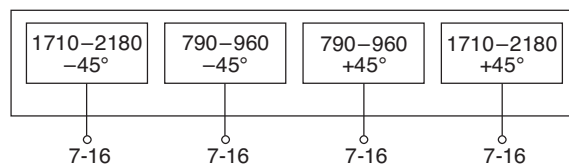

Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 C 65°/65° 16/18.5dBi 0°–10°/0°–6°T


| Type No. | 742224v02 | | | | |
|--|--|---|---|---|---|
| | 790–960 | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 15.6 ... 15.5 ... 15.3 | 16.1 ... 16.0 ... 15.6 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 27 dB | > 28 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Main direction | 0° | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.5 dB | | 0.5 dB | | |
| Squint | ±2.5° | | ±2.5° | | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 10.9° | 10° | 5.0° | 4.8° | 4.6° |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | 0°–6°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0.5° ... 5° ... 9.5° T ≥ 15 ... 16 ... 17 dB | 0.5° ... 5° ... 9.5° T ≥ 15 ... 18 ... 19 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 250 W* | | 200 W* | | |
| Total power per combined input | 450 W* | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 850 / 380 / 910 N | | | | |
| Height/width/depth | 1933 / 261 / 146 mm | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 20 kg / 22 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |

clamps
included



800/900 –
1800/2100/2600
XXPol

* (at 50 °C ambient temperature)

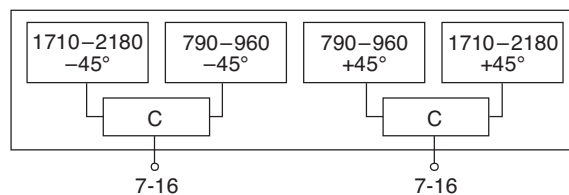


Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2690 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 16/18.5dBi 0°–10°/0°–6°T

| Type No. | 80010665 | | | | | | | clamps included |
|---|--|--|--|---|---|---|---|-----------------|
| | 790–960 | | | 1710–2690 | | | | |
| Frequency range | 790 – 866 MHz | 824 – 896 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.0 ... 16.0 ... 15.5 | 16.1 ... 16.1 ... 15.6 | 16.0 ... 16.2 ... 15.6 | 18.5 ... 18.4 ... 18.1 | 18.5 ... 18.4 ... 18.1 | 18.8 ... 18.7 ... 18.2 | 18.2 ... 18.3 ... 18.0 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 63° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 27 dB | > 27 dB | > 27 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 22 dB | Typically: 22 dB | Typically: 22 dB | Typically: 18 dB | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 10.3° | 10.1° | 9.8° | 4.5° | 4.4° | 4.1° | 3.5° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | 0°–6°, continuously adjustable | | | | |
| Min. sidelobe supression for first sidelobe above main beam | 0° ... 5° ... 10° T 18 ... 17 ... 15 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 17 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2690 MHz) | | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 400 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 990 / 380 / 1030 N | | | | | | | |
| Height/width/depth | 1997 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | | |

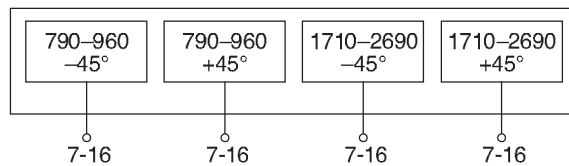

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17/18.5dBi 0°–7°/0°–6°T

| Type No. | 742266v02 | | | | | |
|--|--|---|---|---|---|---|
| | 790–960 | | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.6 ... 16.6 ... 16.5 | 17.0 ... 16.9 ... 16.7 | 17.0 ... 17.1 ... 16.9 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 |
| Tilt | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° |
| Sector | ±60° | ±60° | ±60° | ±60° | ±60° | ±60° |
| Tracking, Avg. | 1.0 dB | | | 0.5 dB | | |
| Squint | ±2.5° | | | ±2.5° | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 8.0° | 7.7° | 7.2° | 5.0° | 4.8° | 4.6° |
| Electrical tilt | 0°–7°, continuously adjustable | | | 0°–6°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 3° ... 7° T ≥ 17 ... 17 ... 15 dB | 0° ... 3° ... 7° T ≥ 17 ... 17 ... 15 dB | 0° ... 3° ... 7° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | |
| Isolation: Intersystem | > 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1160 / 500 / 1210 N | | | | | |
| Height/width/depth | 2533 / 261 / 146 mm | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | |

clamps included

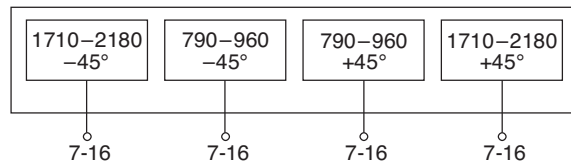

800/900 -
1800/2100/2600
XXPol

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17/18.5dBi 0°–8°/0°–6°T

| Type No. | 80010772 | | | | | |
|--|--|------------------------|------------------------|--------------------------------------|------------------------|------------------------|
| | 790–960 | | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.6 ... 16.8 ... 16.6 | 16.8 ... 17.0 ... 16.7 | 16.8 ... 17.0 ... 16.7 | 18.4 ... 18.5 ... 18.0 | 18.5 ... 18.7 ... 18.1 | 18.4 ... 18.6 ... 18.0 |
| Tilt | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 65° | 62° | 62° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° |
| Sector | ±60° | ±60° | ±60° | ±60° | ±60° | ±60° |
| Tracking, Avg. | 1.5 dB | | | 0.5 dB | | |
| Squint | ±3.0° | | | ±2.5° | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 8.0° | 7.9° | 7.6° | 5.0° | 4.8° | 4.6° |
| Electrical tilt | 0°–8°, continuously adjustable | | | 0°–6°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 3° ... 6° T | 0° ... 3° ... 6° T | 0° ... 3° ... 6° T |
| | ≥ 16 ... 17 ... 16 dB | ≥ 15 ... 17 ... 18 dB | ≥ 15 ... 17 ... 18 dB | ≥ 17 ... 16 ... 15 dB | ≥ 17 ... 16 ... 15 dB | ≥ 17 ... 16 ... 15 dB |
| VSWR | < 1.5 | | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Max. power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female | | | | | |
| Connector position | Rearside | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 840 / 480 / 1160 N | | | | | |
| Height/width/depth | 2399 / 260 / 140 mm | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | |
| Weight | 17 kg / 19 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | |

clamps included

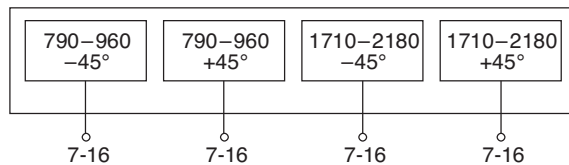

800/900 - 1800/2100/2600 XXPol


Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2690 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 17/18.5dBi 0°–10°/0°–6°T

| Type No. | 80010666 | | | | | | | clamps included |
|---|--|---|---|---|---|---|---|-----------------|
| | 790–960 | | | 1710–2690 | | | | |
| Frequency range | 790 – 866 MHz | 824 – 896 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.8 ... 16.7 ... 16.5 | 17.0 ... 17.0 ... 16.8 | 17.1 ... 17.2 ... 17.0 | 18.5 ... 18.4 ... 18.1 | 18.5 ... 18.4 ... 18.1 | 18.8 ... 18.7 ... 18.2 | 18.2 ... 18.3 ... 18.0 | |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 63° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 24 dB | Typically: 23 dB | Typically: 22 dB | Typically: 18 dB | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction 0° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.1° | 4.5° | 4.4° | 4.1° | 3.5° | |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | | 0°–6°, continuously adjustable | | | | |
| Min. sidelobe supression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB | 0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB | 0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 17 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2690 MHz) | | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 400 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1270 / 490 / 1320 N | | | | | | | |
| Height/width/depth | 2622 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | | |
| Weight | 29 kg / 31 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

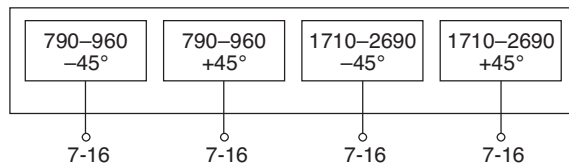

800/900 -
1800/200/2600
XXPol


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17.5/18.5dBi 4°–12°/4°–14°T

| Type No. | 80010486v01 | | | | | | clamps included |
|--------------------------------------|--|------------------------|------------------------|--------------------------------------|------------------------|------------------------|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.8 ... 16.7 ... 16.6 | 17.0 ... 16.8 ... 16.8 | 17.2 ... 17.0 ... 16.8 | 17.8 ... 18.1 ... 17.5 | 18.3 ... 18.3 ... 17.8 | 18.7 ... 18.7 ... 18.0 | |
| Tilt | 4° ... 8° ... 12° | 4° ... 8° ... 12° | 4° ... 8° ... 12° | 4° ... 9° ... 14° | 4° ... 9° ... 14° | 4° ... 9° ... 14° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 66° | 66° | 64° | 61° | |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | |
| Maindirection 0° | 23 dB | 24 dB | 25 dB | 18 dB | 18 dB | 20 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.2° | 5° | 4.8° | 4.6° | |
| Electrical tilt | 4°–12°, continuously adjustable | | | 4°–14°, continuously adjustable | | | |
| Sidelobe suppression | 4° ... 8° ... 12° T | 4° ... 8° ... 12° T | 4° ... 8° ... 12° T | 4° ... 9° ... 14° T | 4° ... 9° ... 14° T | 4° ... 9° ... 14° T | |
| - for first sidelobe above main beam | 18 ... 17 ... 16 dB | 19 ... 18 ... 18 dB | 19 ... 18 ... 18 dB | 20 ... 18 ... 16 dB | 19 ... 19 ... 16 dB | 18 ... 18 ... 18 dB | |
| - within 0°–20° sector above horizon | 15 ... 15 ... 14 dB | 16 ... 15 ... 14 dB | 16 ... 15 ... 14 dB | 17 ... 17 ... 15 dB | 17 ... 17 ... 15 dB | 17 ... 17 ... 15 dB | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Isolation: Intersystem | > 45 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 800 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 920 / 460 / 1150 N | | | | | | |
| Height/width/depth | 2516 / 262 / 139 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 28 kg / 30 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

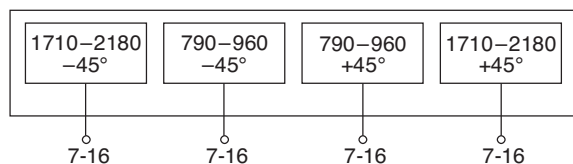

Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 65° | 65° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 C 65°/65° 17/18.5dBi 0°–7°/0°–6°T


| Type No. | 742225v02 | | | | |
|--|--|---|---|---|---|
| | 790–960 | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.6 ... 16.6 ... 16.5 | 17.0 ... 17.1 ... 16.9 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 |
| Tilt | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Typically: 30 dB | Typically: 30 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB |
| Main direction | 0° | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Tracking, Avg. | 1.0 dB | | 0.5 dB | | |
| Squint | ±2.5° | | ±2.5° | | |
| Vertical Pattern: | | | | | |
| Half-power beam width | 7.7° | 7.2° | 5.0° | 4.8° | 4.6° |
| Electrical tilt | 0°–7°, continuously adjustable | | 0°–6°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 4° ... 7° T ≥ 17 ... 17 ... 15 dB | 0° ... 4° ... 7° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | |
| Max. power per input | 250 W* | | 200 W* | | |
| Total power per combined input | 450 W* | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1160 / 500 / 1210 N | | | | |
| Height/width/depth | 2533 / 261 / 146 mm | | | | |
| Category of mounting hardware | H (Heavy) | | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |

clamps
included



800/900 –
1800/2100/2600
XXPol

* (at 50 °C ambient temperature)

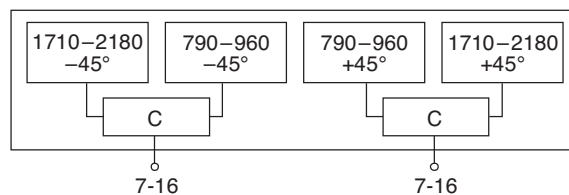


Dual-band Panel Dual Polarization Half-power Beam Width

| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 90° | 90° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 13.5/16.5dBi 0°–13°/0°–10°T

| Type No. | 80010121v01 | | | | | | clamps included |
|---|--|-------------------------|-------------------------|--------------------------------------|------------------------|------------------------|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 13.4 ... 13.4 ... 13.1 | 13.6 ... 13.6 ... 13.4 | 13.9 ... 13.8 ... 13.5 | 16.4 ... 16.4 ... 16.2 | 16.4 ... 16.5 ... 16.0 | 16.4 ... 15.9 ... 15.3 | |
| Tilt | 0.5° ... 6° ... 12.5° | 0.5° ... 6° ... 12.5° | 0.5° ... 6° ... 12.5° | 0.5° ... 5° ... 10° | 0.5° ... 5° ... 10° | 0.5° ... 5° ... 10° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 88° | 86° | 88° | 82° | 85° | 90° | |
| Front-to-back ratio, copolar | > 23 dB | > 23 dB | > 23 dB | > 23 dB | > 23 dB | > 23 dB | |
| Cross polar ratio | Typically: 17 dB | Typically: 18 dB | Typically: 20 dB | Typically: 17 dB | Typically: 16 dB | Typically: 15 dB | |
| Main direction | 0° | | | | | | |
| Sector | ±60° | > 10 dB | > 13 dB | > 10 dB | > 12 dB | > 10 dB | |
| | ±60° | avg. 16 dB | avg. 19 dB | avg. 17 dB | avg. 19 dB | avg. 19 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 15.0° | 14.5° | 14.0° | 7.0° | 6.6° | 6.4° | |
| Electrical tilt | 0.5°–12.5°, continuously adjustable | | | 0.5°–10°, continuously adjustable | | | |
| Min. sidelobe suppression for first sidelobe above main beam: | 0.5° ... 6° ... 12.5° T | 0.5° ... 6° ... 12.5° T | 0.5° ... 6° ... 12.5° T | 0.5° ... 5° ... 10° T | 0.5° ... 5° ... 10° T | 0.5° ... 5° ... 10° T | |
| average: | 16 ... 14 ... 14 dB | 16 ... 15 ... 14 dB | 18 ... 16 ... 16 dB | 17 ... 17 ... 16 dB | 17 ... 18 ... 16 dB | 18 ... 16 ... 16 dB | |
| | 20 ... 19 ... 16 dB | 20 ... 18 ... 17 dB | 22 ... 20 ... 20 dB | 20 ... 20 ... 18 dB | 21 ... 22 ... 17 dB | 20 ... 20 ... 16 dB | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Isolation: Intersystem | > 42 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 420 / 260 / 620 N | | | | | | |
| Height/width/depth | 1384 / 262 / 149 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 21 kg / 23 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

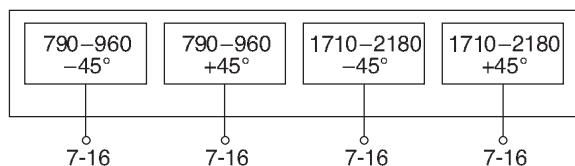

Dual-band Panel Dual Polarization Half-power Beam Width


| | |
|---------|-----------|
| 790–960 | 1710–2180 |
| X | X |
| 90° | 90° |

KATHREIN
Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 15/18dBi 0°–10°/0°–6°T

| Type No. | 80010122v01 | | | | | |
|--|--|--|--|---|---|---|
| | 790–960 | | | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 824 – 896 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain (dBi) | 14.8 ... 14.8 ... 14.8 | 14.8 ... 15.0 ... 14.8 | 14.9 ... 15.1 ... 14.9 | 17.7 ... 17.8 ... 17.7 | 17.7 ... 18.0 ... 17.6 | 17.6 ... 17.8 ... 17.4 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 88° | 87° | 88° | 82° | 85° | 90° |
| Front-to-back ratio (180°±30°) | > 23 dB | > 23 dB | > 23 dB | > 23 dB | > 23 dB | > 23 dB |
| Cross polar ratio | Typically: 18 dB | Typically: 18 dB | Typically: 20 dB | Typically: 17 dB | Typically: 16 dB | Typically: 15 dB |
| Main direction | 0° | | | | | |
| Sector | ±60° | > 10 dB | > 13 dB | > 10 dB | > 12 dB | > 10 dB |
| | ±60° | avg. 16 dB | avg. 19 dB | avg. 17 dB | avg. 19 dB | avg. 19 dB |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 11.0° | 10.9° | 10.5° | 5.5° | 5.2° | 5.0° |
| Electrical tilt | 0°–10°, continuously adjustable | | | 0°–6°, continuously adjustable | | |
| Min. sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 18 ... 16 ... 14 dB | 0° ... 5° ... 10° T 16 ... 16 ... 15 dB | 0° ... 5° ... 10° T 16 ... 16 ... 15 dB | 0° ... 3° ... 6° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 16 dB |
| VSWR | < 1.5 | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | |
| Isolation: Intersystem | > 42 dB (790–960 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | |
| Input | 4 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 580 / 360 / 870 N | | | | | |
| Height/width/depth | 1917 / 262 / 149 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 27 kg / 29 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

clamps included

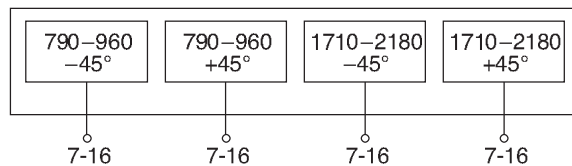

800/900 -
1800/200/2600
XXPol

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

1710–2180

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 16.5/18dBi 0°–7°/0°–6°T

| Type No. | 80010123v03 | | | | | | clamps included |
|---|--|---|---|---|---|---|-----------------|
| | 790–960 | | | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.1 ... 16.2 ... 16.1 | 16.3 ... 16.4 ... 16.3 | 16.5 ... 16.6 ... 16.5 | 17.8 ... 17.7 ... 17.4 | 18.0 ... 17.9 ... 17.4 | 17.9 ... 17.8 ... 17.3 | |
| Tilt | 0.5° ... 4° ... 7° | 0.5° ... 4° ... 7° | 0.5° ... 4° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 86° | 86° | 86° | 84° | 85° | 88° | |
| Front-to-back ratio, copolar | > 25 dB | > 25 dB | > 25 dB | > 23 dB | > 23 dB | > 23 dB | |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | ±60° | ±60° | ±60° | ±60° | ±60° | |
| | > 10 dB | > 10 dB | > 13 dB | > 10 dB | > 12 dB | > 10 dB | |
| | avg. 16 dB | avg. 16 dB | avg. 19 dB | avg. 16 dB | avg. 17 dB | avg. 18 dB | |
| Tracking, Avg. | 0.5 dB | | | 0.5 dB | | | |
| Squint | ±3.0° | | | ±3.0° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.3° | 7.2° | 6.9° | 4.8° | 4.5° | 4.2° | |
| Electrical tilt | 0.5°–7°, continuously adjustable | | | 0°–6°, continuously adjustable | | | |
| Min. sidelobe supression for first sidelobe above main beam | 0.5° ... 4° ... 7° T 15 ... 14 ... 14 dB | 0.5° ... 4° ... 7° T 15 ... 14 ... 14 dB | 0.5° ... 4° ... 7° T 15 ... 14 ... 15 dB | 0° ... 3° ... 6° T 18 ... 17 ... 16 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 16 ... 17 dB | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Isolation: Intersystem | > 45 dB (790–960 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 4 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 2x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 840 / 510 / 1260 N | | | | | | |
| Height/width/depth | 2635 / 262 / 149 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 33 kg / 35 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

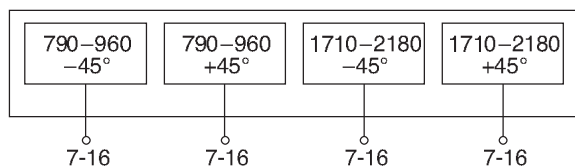

18.12.2018
009/200/00/00/18
- 005/008

Summary – Directional Antennas

Triple-band

800/900 – 1800/2000/2600

Dual Polarization +45°/-45°

| Type | Type No. | Height [mm] | Connector position | Page |
|--|--------------------|-------------|--------------------|------|
| XXXPol Panel 790–862 65° 14dBi 0°–14°T | 80010697 | 1332 | bottom | 126 |
| 880–960 65° 14dBi 0°–14°T | | | | |
| 1710–2180 65° 17dBi 0°–8°T | | | | |
| XXXPol Panel 790–862 65° 15.5dBi 0°–10°T | 80010698 | 1932 | bottom | 127 |
| 880–960 65° 16dBi 0°–10°T | | | | |
| 1710–2180 65° 18.5dBi 0°–6°T | | | | |
| XXXPol Panel 790–862 65° 16.5dBi 0°–7°T | 80010699 | 2532 | bottom | 128 |
| 880–960 65° 17dBi 0°–7°T | | | | |
| 1710–2180 65° 18.5dBi 0°–6°T | | | | |
| XXXPol Panel 790–960 65° 15dBi 0°–14°T | 742270v03 | 1384 | bottom | 129 |
| 1710–1880 65° 17dBi 0°–8°T | | | | |
| 1920–2170 65° 17dBi 0°–8°T | | | | |
| XXXPol Panel 790–960 C 65° 15dBi 0°–12°T | 80010670v01 | 1498 | bottom | 130 |
| 1710–1880 65° 16.5dBi 0°–8°T | | | | |
| 1920–2170 65° 17dBi 0°–8°T | | | | |
| XXXPol Panel 806–960 65° 15dBi 0°–14°T | 80010290v01 | 1540 | bottom | 131 |
| 1710–2180 65° 15dBi 0°–14°T | | | | |
| 1710–2180 65° 15dBi 0°–14°T | | | | |
| XXXPol Panel 790–960 65° 16.5dBi 0°–10°T | 742271v03 | 1933 | bottom | 132 |
| 1710–1880 65° 18dBi 0°–6°T | | | | |
| 1920–2170 65° 18dBi 0°–6°T | | | | |
| XXXPol Panel 806–960 C 65° 16.5dBi 0°–10°T | 80010671v01 | 2058 | bottom | 133 |
| 1710–1880 65° 17.5dBi 0°–6°T | | | | |
| 1920–2170 65° 18dBi 0°–6°T | | | | |
| XXXPol Panel 790–960 65° 16.5dBi 2°–14°T | 80010291v02 | 2058 | bottom | 134 |
| 1710–2180 65° 16.5dBi 0°–14°T | | | | |
| 1710–2180 65° 16.5dBi 0°–14°T | | | | |
| XXXPol Panel 790–960 65° 17dBi 0°–10°T | 80010692 | 2622 | bottom | 135 |
| 1710–2690 65° 17dBi 0°–10°T | | | | |
| 1710–2690 65° 17dBi 2°–10°T | | | | |
| XXXPol Panel 790–960 65° 17.5dBi 0°–7°T | 742272v03 | 2533 | bottom | 136 |
| 1710–1880 65° 18dBi 0°–6°T | | | | |
| 1920–2170 65° 18dBi 0°–6°T | | | | |
| XXXPol Panel 790–960 C 65° 17.5dBi 0°–7°T | 80010672v01 | 2628 | bottom | 137 |
| 1710–1880 65° 17.5dBi 0°–6°T | | | | |
| 1920–2170 65° 18dBi 0°–6°T | | | | |
| XXXPol Panel 790–960 65° 17.5dBi 2°–10°T | 80010292v03 | 2598 | bottom | 138 |
| 1710–2180 65° 17.5dBi 0°–10°T | | | | |
| 1710–2180 65° 17dBi 0°–10°T | | | | |
| XXXPol Panel 790–960 65° 17.5dBi 4°–12°T | 80010492v01 | 2694 | bottom | 139 |
| 1710–2180 65° 17dBi 0°–14°T | | | | |
| 1710–2180 65° 17dBi 0°–14°T | | | | |

C = integrated Combiner

New or changed product

Summary – Directional Antennas

Triple-band

800/900 – 1800/2000/2600

Dual Polarization +45°/-45°

| Type | Type No. | Height [mm] | Connector position | Page | | | |
|--------------|-----------|-------------|--------------------|-----------------|------|--------|-----|
| XXXPol Panel | 790-960 | 65° | 15dBi 0°-16°T | 80010674 | 1403 | bottom | 140 |
| | 1710-2170 | 65° | 17dBi 2°-10°T | | | | |
| | 2490-2690 | 65° | 16.5dBi 2°-10°T | | | | |
| XXXPol Panel | 790-960 | 65° | 16dBi 0°-10°T | 80010675 | 1997 | bottom | 141 |
| | 1710-2170 | 65° | 18dBi 0°-6°T | | | | |
| | 2490-2690 | 65° | 18dBi 0°-6°T | | | | |
| XXXPol Panel | 790-960 | 65° | 17dBi 0°-10°T | 80010676 | 2622 | bottom | 142 |
| | 1710-2170 | 65° | 18dBi 0°-6°T | | | | |
| | 2490-2690 | 65° | 18dBi 0°-6°T | | | | |
| XXXPol Panel | 790-960 | 65° | 16dBi 0°-10°T | 80010691 | 1997 | bottom | 143 |
| | 1710-2690 | 65° | 16dBi 2°-12°T | | | | |
| | 1710-2690 | 65° | 16dBi 2°-12°T | | | | |

C = integrated Combiner

New or changed product

When deploying Triple-band Antennas, please also consider using special Triple-band Combiners (see page 241)

Triple-band Panel

790–862

880–960

1710–2180

KATHREIN

Dual Polarization

X

X

X

Antennen · Electronic

Half-power Beam Width


65°

65°

65°

XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 14/14/17dBi 0°–14°/0°–14°/0°–8°T

| Type No. | 80010697 | | | | | clamps included |
|---|---|--|---|---|---|-----------------|
| | 790–862 | 880–960 | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain (dBi) | 13.9 ... 13.9 ... 13.3 | 14.2 ... 14.1 ... 13.5 | 16.7 ... 16.9 ... 16.7 | 16.9 ... 17.1 ... 16.7 | 16.9 ... 17.1 ... 16.8 | |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | 0° ... 4° ... 8° | |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 65° | 64° | 63° | 61° | |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 32 dB | > 32 dB | > 32 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Maindirection | 0° | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 16.5° | 15.4° | 7.4° | 7.1° | 6.7° | |
| Electrical tilt continuously adjustable | 0°–14° | 0°–14° | 0°–8° | | | |
| Sidelobe suppression for first sidelobe above main beam: average: | 0° ... 7° ... 14° T ≥ 17 ... 17 ... 15 dB | 0° ... 7° ... 14° T ≥ 17 ... 17 ... 16 dB | 0° ... 4° ... 8° T ≥ 17 ... 16 ... 15 dB | 0° ... 4° ... 8° T ≥ 17 ... 17 ... 16 dB | 0° ... 4° ... 8° T ≥ 17 ... 17 ... 16 dB | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | | | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | | | |
| Isolation: Intersystem | > 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz) | | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc | < –150 dBc | | | |
| Max. power per input | 250 W* | 250 W* | 250 W* | | | |
| Total power | 500 W* | 500 W* | 500 W* | | | |
| Input | 6 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 670 / 260 / 700 N | | | | | |
| Height/width/depth | 1332 / 300 / 152 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 21 kg / 23 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

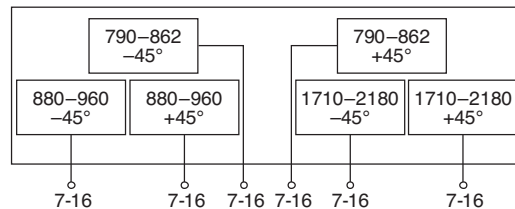

*(at 50 °C ambient temperature)

Triple-band Panel

790–862 880–960 1710–2180

KATHREIN

Dual Polarization

X X X

Antennen · Electronic

Half-power Beam Width

65° 65° 65°


XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 15.5/16/18.5dBi 0°–10°/0°–10°/0°–6°T

| Type No. | 80010698 | | | | | clamps included |
|---|---|--|---|---|---|-----------------|
| | 790–862 | 880–960 | 1710–2180 | | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Gain (dBi) | 15.1 ... 15.4 ... 15.1 | 15.6 ... 15.9 ... 15.4 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 65° | 65° | 65° | 61° | |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 27 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Main direction | 0° | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Tracking, Avg. | 1.0 dB | 1.0 dB | 0.5 dB | | | |
| Squint | ±2.5° | ±2.5° | ±2.5° | | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 11.5° | 10.1° | 5.0° | 4.8° | 4.6° | |
| Electrical tilt, continuously adjustable | 0°–10° | 0°–10° | 0°–6° | | | |
| Sidelobe suppression for first sidelobe above main beam: average: | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 17 dB | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | | | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | | | |
| Isolation: Intersystem | > 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz) | | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc | < –150 dBc | | | |
| Max. power per input | 250 W* | 250 W* | 250 W* | | | |
| Total power | 500 W* | 500 W* | 500 W* | | | |
| Input | 6 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 850 / 380 / 910 N | | | | | |
| Height/width/depth | 1932 / 269 / 154 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 23 kg / 25 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |



800/900 –
1800/2000/2600
XXXPol

* (at 50 °C ambient temperature)

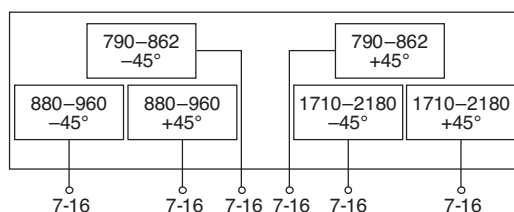

Triple-band Panel

790–862

880–960

1710–2180

KATHREIN

Dual Polarization

X

X

X

Antennen · Electronic

Half-power Beam Width

65°


65°

65°

XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 16.5/17/18.5dBi 0°–7°/0°–7°/0°–6°T

| Type No. | 80010699 | | | | |
|---|---|---|---|---|---|
| | 790–862 | 880–960 | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.3 ... 16.4 ... 16.2 | 16.7 ... 16.9 ... 16.6 | 18.2 ... 18.5 ... 18.3 | 18.5 ... 18.7 ... 18.3 | 18.5 ... 18.7 ... 18.3 |
| Tilt | 0° ... 4° ... 7° | 0° ... 4° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 68° | 65° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 25 dB > 10 dB | Typically: 27 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Vertical Pattern: | | | | | |
| Half-power beam width | 8.3° | 7.6° | 5.0° | 4.8° | 4.6° |
| Electrical tilt, continuously adjustable | 0°–7° | 0°–7° | 0°–6° | | |
| Sidelobe suppression for first sidelobe above main beam: average: | 0° ... 4° ... 7° T ≥ 17 ... 16 ... 16 dB | 0° ... 4° ... 7° T ≥ 18 ... 17 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | < 1.5 | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | | |
| Isolation: Intersystem | > 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz) | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | < –150 dBc | < –150 dBc | | |
| Max. power per input Total power | 250 W* 500 W* | 250 W* 500 W* | 250 W* 500 W* | | |
| Input | 6 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1160 / 500 / 1210 N | | | | |
| Height/width/depth | 2532 / 269 / 154 mm | | | | |
| Category of mounting hardware | H (Heavy) | | | | |
| Weight | 26 kg / 28 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |

clamps
included

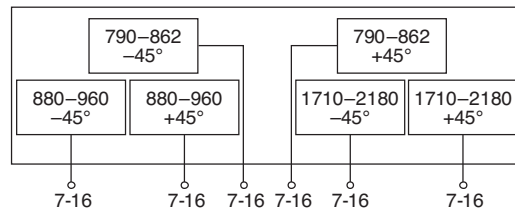

*(at 50 °C ambient temperature)

Triple-band Panel

790–960 1710–1880 1710–2170

KATHREIN

Dual Polarization

X X X

Antennen · Electronic

Half-power Beam Width

65° 65° 65°

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 15/17/17dBi 0°–14°/0°–8°/0°–8°T


| Type No. | 742270v03 | | | |
|---|--|--|---|---|
| | 790–960 | | 1710–1880 | 1710–2170 |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1170 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 14.4 ... 14.3 ... 14.0 | 14.8 ... 14.7 ... 14.2 | 16.8 ... 16.9 ... 16.6 | 16.9 ... 17.0 ... 16.7 |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 4° ... 8° | 0° ... 4° ... 8° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 32 dB | > 32 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Tracking, Avg. | 1.0 dB | | 0.5 dB | 0.5 dB |
| Squint | ±2.0° | | ±3.0° | ±3.0° |
| Vertical Pattern: | | | | |
| Half-power beam width | 16.5° | 15.3° | 7.4° | 6.7° |
| Electrical tilt, contin. adjust. | 0°–14° | | 0°–8° | 0°–8° |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 7° ... 14° T 17 ... 16 ... 15 dB | 0° ... 7° ... 14° T 17 ... 18 ... 17 dB | 0° ... 4° ... 8° T 17 ... 17 ... 16 dB | 0° ... 4° ... 8° T 16 ... 16 ... 15 dB |
| VSWR | < 1.5 | | < 1.5 | < 1.5 |
| Isolation: Intrasystem | > 30 dB | | > 30 dB | > 30 dB |
| Isolation: Intersystem | Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz) | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | < –150 dBc | < –150 dBc |
| Max. power per input Total power | 500 W* 1000 W* | | 200 W* 400 W* | 200 W* 400 W* |
| Input | 6 x 7-16 female (long neck) | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 600 / 270 / 640 N | | | |
| Height/width/depth | 1384 / 261 / 146 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 19 kg / 21 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

clamps
included



800/900 –
1800/2000/2600
XXXPol

*(at 50 °C ambient temperature)

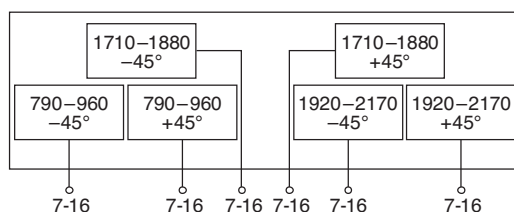

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–1880/1920–2170 C 65°/65°/65° 15/16.5/17dBi 0°–12°/0°–8°/0°–8°T

| Type No. | 80010670v01 | | | | |
|---|--|---------------|---------------|---|---|
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 18800 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 14.8 dBi | 2 x 15 dBi | 2 x 15.2 dBi | 2 x 16.5 dBi | 2 x 17.2 dBi |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 69° | 67° | 65° | 66° | 65° |
| Front-to-back ratio, copolar | > 27 dB | | | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 25 dB | | | Typically: 16 dB | Typically: 18 dB |
| Maindirection | 0° | | | 0° | 0° |
| Sector | ±60° | | | > 10 dB | > 10 dB |
| Vertical Pattern: | | | | | |
| Half-power beam width | 14° | 13.6° | 13° | 6.7° | 6.2° |
| Electrical tilt, contin. adjust. | 0.5°–12° | | | 0.5°–8° | 0°–8° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 6° ... 12° T 17 ... 17 ... 14 dB | | | 0° ... 4° ... 8° T 18 ... 16 ... 14 dB | 0° ... 4° ... 8° T 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Isolation: Intersystem | Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170MHz) | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | | | < –150 dBc |
| Max. power per input | 250 W | | 200 W | 200 W | |
| (at 50 °C ambient temperature) | | | | | |
| Max. power per combined input | 450 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 460 / 290 / 680 N | | | | |
| Height/width/depth | 1498 / 262 / 149 mm | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 21.5 kg / 23.5 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |

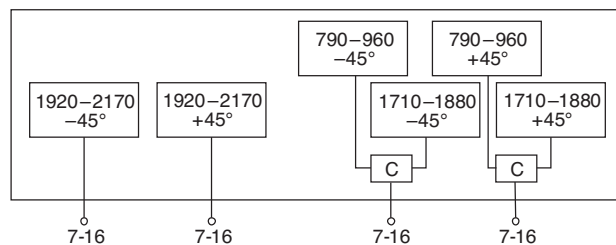

800/900 - 1800/2100/2600 XXXPol

Triple-band Panel

Dual Polarization

Half-power Beam Width

806–960

1710–2180

1710–2180

KATHREIN

X

X

X

Antennen · Electronic

65°


65°

65°

XXXPol Panel 806–960/1710–2180/1710–2180 65°/65°/65° 15/15/15dBi 0°–14°/0°–14°/0°–14°T

| Type No. | 80010290v01 | | | | | |
|---|--|--|--|---|--|--|
| | 806–960 | | 1710–2180 | | 1710–2180 | |
| Frequency range | 806 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain: (dBi) | 14.4 ... 14.3 ... 14.0 | 14.6 ... 14.4 ... 14.2 | 14.9 ... 14.7 ... 14.4 | 14.5 ... 14.5 ... 14.2 | 14.8 ... 14.8 ... 14.5 | 15.1 ... 14.8 ... 14.4 |
| 1710–2180 MHz (Syst. bottom) | | | | 14.0 ... 14.0 ... 13.7 | 14.4 ... 14.3 ... 13.9 | 14.9 ... 14.8 ... 14.2 |
| 1710–2180 MHz (Syst. top) | | | | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° |
| Tilt | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 69° | 68° | 67° | 67° | 63° | 60° |
| Front-to-back ratio (180°±30°) | > 25 dB | | | > 25 dB | | |
| Cross polar ratio | Typically: 25 dB | | | Typically: 20 dB | | |
| Main direction | 0° | | | 0° | | |
| Sector | ±60° | | | ±60° | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 14.7° | 14.3° | 13.9° | 13.8° | 13.2° | 12.6° |
| Electrical tilt | 0°–14°, continuously adjustable | | | Syst. bottom: 0°–14°, continuously adjustable Syst. top: 0°–14°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 7° ... 14° T 18 ... 16 ... 16 dB | 0° ... 7° ... 14° T 18 ... 16 ... 16 dB | 0° ... 7° ... 14° T 18 ... 17 ... 16 dB | 0° ... 7° ... 14° T 18 ... 16 ... 15 dB | 0° ... 7° ... 14° T 18 ... 17 ... 17 dB | 0° ... 7° ... 14° T 18 ... 16 ... 17 dB |
| VSWR | < 1.5 | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | |
| Isolation: Intersystem | > 35 dB (806–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Input | 6 x 7-16 female | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 480 / 300 / 700 N | | | | | |
| Height/width/depth | 1540 / 262 / 149 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 21 kg / 23 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

800/900 -
1800/2000/2600
XXXPol

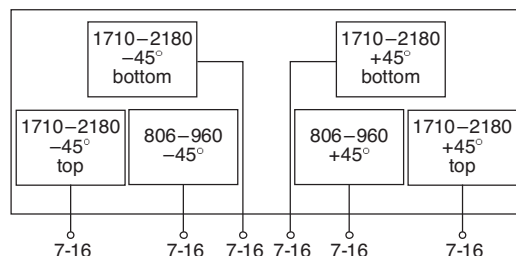

Triple-band Panel

790–960 1710–1880 1920–2170

KATHREIN

Dual Polarization

X X X

Antennen · Electronic


Half-power Beam Width

65° 65° 65°

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 16.5/18/18dBi 0°–10°/0°–6°/0°–6°T

| Type No. | 742271v03 | | | |
|--|--|--|---|---|
| | 790–960 | | 1710–1880 | 1710–2170 |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1170 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 15.9 ... 15.8 ... 15.6 | 16.4 ... 16.3 ... 15.9 | 17.8 ... 18.0 ... 17.8 | 17.9 ... 18.2 ... 17.9 |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 27 dB | > 28 dB | > 30 dB | > 30 dB |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: |
| Main direction | 0° | 0° | 0° | 0° |
| Sector | ±60° | ±60° | ±60° | ±60° |
| Tracking, Avg. | 1.5 dB | | 0.5 dB | 0.5 dB |
| Squint | ±2.5° | | ±2.5° | ±2.5° |
| Vertical Pattern: | | | | |
| Half-power beam width | 10.9° | 10° | 5.0° | 4.6° |
| Electrical tilt, contin. adjust. | 0°–10° | | 0°–6° | 0°–6° |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 5° ... 10° T ≥ 15 ... 16 ... 17 dB | 0° ... 5° ... 10° T ≥ 15 ... 18 ... 19 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | | < 1.5 | < 1.5 |
| Isolation: Intrasystem | > 30 dB | | > 30 dB | > 30 dB |
| Isolation: Intersystem | Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz) | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | < –150 dBc | < –150 dBc |
| Max. power per input | 300 W* | | 200 W* | 200 W* |
| Total power | 600 W* | | 400 W* | 400 W* |
| Input | 6 x 7-16 female (long neck) | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 860 / 380 / 920 N | | | |
| Height/width/depth | 1933 / 261 / 146 mm | | | |
| Category of mounting hardware | M (Medium) | | | |
| Weight | 24 kg / 26 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | |

* (at 50 °C ambient temperature)

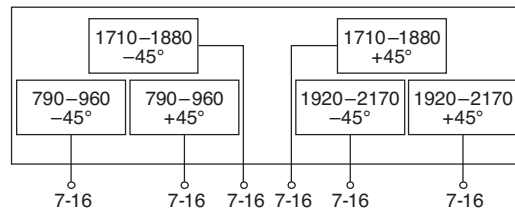

800/900 – 1800/2100/2600 XXXPol

Triple-band Panel


Dual Polarization

Half-power Beam Width

| | | | |
|---------|-----------|-----------|-----------------------|
| 806–960 | 1710–1880 | 1920–2170 | KATHREIN |
| X | X | X | Antennen · Electronic |
| 65° | 65° | 65° | |

XXXPol Panel 806–960/1710–1880/1920–2170 C 65°/65°/65° 16.5/17.5/18dBi 0°–10°/0°–6°/0°–6°T

| Type No. | 80010671 v01 | | | | |
|---|---|---------------|---------------|---|---|
| | 806–960 | | 1710–1880 | 1920–2170 | |
| Frequency range | 806 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 16 dBi | 2 x 16.1 dBi | 2 x 16.3 dBi | 2 x 17.5 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 69° | 68° | 67° | 65° | 65° |
| Front-to-back ratio, copolar | > 25 dB | | | > 24 dB | > 25 dB |
| Cross polar ratio | Typically: 25 dB | | | Typically: 18 dB | Typically: 20 dB |
| Main direction | 0° | | | 0° | 0° |
| Sector | ±60° | | | > 10 dB | > 10 dB |
| Vertical Pattern: | | | | | |
| Half-power beam width | 9.5° | 9.3° | 9.0° | 4.7° | 4.3° |
| Electrical tilt, contin. adjust. | 0°–10° | | | 0°–6° | 0°–6° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 15 ... 15 ... 13 dB | | | 0° ... 3° ... 6° T 18 ... 17 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 15 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Isolation: Intersystem | Typically: > 50 dB (806–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz) | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | | | < –150 dBc |
| Max. power per input | 250 W | | 200 W | 200 W | |
| | (at 50 °C ambient temperature) | | | | |
| Max. power per combined input | 450 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 640 / 400 / 950 N | | | | |
| Height/width/depth | 2058 / 262 / 149 mm | | | | |
| Category of mounting hardware | M (Medium) | | | | |
| Weight | 28 kg / 30 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |

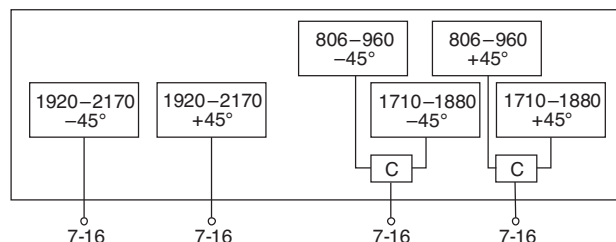

800/900 -
1800/2000/2600
XXXPol

Triple-band Panel Dual Polarization Half-power Beam Width

790–960 1710–2180 1710–2180

KATHREIN

X X X


Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 16.5/16.5/16.5dBi 2°–14°/0°–14°/0°–14°T

| Type No. | 80010291 v02 | | | | | |
|---|--|--|--|--|--|--|
| | 790–960 | | 1710–2180 | | 1710–2180 | |
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Average gain: (dBi) | 16.2 ... 16.0 ... 15.7 | 16.3 ... 16.1 ... 15.8 | 16.4 ... 16.2 ... 15.8 | 15.9 ... 15.9 ... 15.5 | 16.2 ... 16.2 ... 15.7 | 16.3 ... 16.3 ... 15.8 |
| 1710–2180 MHz (Syst. bottom) | | | | 15.8 ... 15.8 ... 15.4 | 16.1 ... 16.1 ... 15.4 | 16.3 ... 16.2 ... 15.5 |
| 1710–2180 MHz (Syst. top) | | | | | | |
| Tilt | 2° ... 8° ... 14° | 2° ... 8° ... 14° | 2° ... 8° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° |
| Horizontal Pattern: | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 65° | 64° | 60° |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 18 dB | Typically: 19 dB | Typically: 20 dB |
| Main direction 0° | | | | | | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Tracking | 1.0 dB | | | 1.0 dB | | |
| Vertical Pattern: | | | | | | |
| Half-power beam width | 10° | 9.7° | 9.3° | 9.5° | 9° | 8.7° |
| Electrical tilt | 2°–14°, continuously adjustable | | | 0°–14°, continuously adjustable | | |
| Sidelobe suppression for first sidelobe above main beam | 2° ... 8° ... 14° T 17 ... 17 ... 15 dB | 2° ... 8° ... 14° T 17 ... 17 ... 16 dB | 2° ... 8° ... 14° T 17 ... 17 ... 16 dB | 0° ... 7° ... 14° T 18 ... 17 ... 17 dB | 0° ... 7° ... 14° T 18 ... 17 ... 17 dB | 0° ... 7° ... 14° T 18 ... 17 ... 17 dB |
| VSWR | < 1.5 | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | |
| Isolation: Intersystem | > 35 dB (790–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz) | | | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | |
| Input | 6 x 7-16 female (long neck) | | | | | |
| Connector position | Bottom | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 640 / 400 / 950 N | | | | | |
| Height/width/depth | 2058 / 262 / 149 mm | | | | | |
| Category of mounting hardware | M (Medium) | | | | | |
| Weight | 27 kg / 29 kg (clamps incl.) | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | |

clamps included

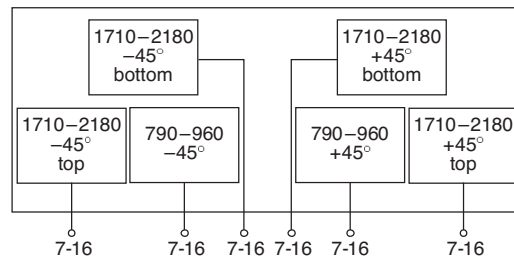

800/900 -
1800/2100/2600
XXXPol

Triple-band Panel Dual Polarization Half-power Beam Width

790–960 1710–2690 1710–2690

KATHREIN


X X X

Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2690/1710–2690 65°/65°/65° 17/17/17dBi 0°–10°/0°–10°/2°–10°T

| Type No. | 80010692 | | | | | | | clamps included |
|--|---|---|---|---|---|---|---|------------------------|
| | 790–960 | | | 1710–2690 | 1710–2690 | 1710–2690 | 1710–2690 | 2490–2690 MHz |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Average gain: (dBi) | 16.8 ... 16.7 ... 16.5 | 17.0 ... 17.0 ... 16.8 | 17.1 ... 17.2 ... 17.0 | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° |
| 1710–2690 MHz (Syst. bottom) | | | | 16.4 ... 16.4 ... 16.1 | 16.6 ... 16.7 ... 16.4 | 16.7 ... 16.9 ... 16.1 | 16.2 ... 16.9 ... 16.4 | 16.2 ... 16.9 ... 16.4 |
| 1710–2690 MHz (Syst. top) | | | | 16.6 ... 16.6 ... 16.1 | 16.4 ... 16.4 ... 15.9 | 16.3 ... 16.4 ... 15.9 | 16.2 ... 17.0 ... 16.4 | 16.2 ... 17.0 ... 16.4 |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 2° ... 6° ... 10° | 2° ... 6° ... 10° | 2° ... 6° ... 10° | 2° ... 6° ... 10° | 2° ... 6° ... 10° |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | Syst. bottom: 64° Syst. top: 60° | Syst. bottom: 62° Syst. top: 63° | Syst. bottom: 60° Syst. top: 65° | Syst. bottom: 65° Syst. top: 67° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 24 dB | Typically: 23 dB | Typically: 22 dB | Typically: 18 dB | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB | Typically: 20 dB |
| Main direction 0° | | | | | | | | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.1° | Syst. bottom: 7.7° Syst. top: 6.5° | Syst. bottom: 7.4° Syst. top: 6.3° | Syst. bottom: 7.0° Syst. top: 6.0° | Syst. bottom: 5.9° Syst. top: 5.0° | |
| Electrical tilt | 0.5°–9.5°, continuously adjustable | | | 0°–10° (Syst. bottom), 2°–10° (Syst. top), continuously adjustable | | | | |
| Min. sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB | 0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB | 0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB | Syst. bottom: 0° ... 5° ... 10° T 18 ... 15 ... 14 dB Syst. top: 2° ... 6° ... 10° T 14 ... 16 ... 18 dB | Syst. bottom: 0° ... 5° ... 10° T 18 ... 17 ... 16 dB Syst. top: 2° ... 6° ... 10° T 15 ... 17 ... 18 dB | Syst. bottom: 0° ... 5° ... 10° T 18 ... 18 ... 16 dB Syst. top: 2° ... 6° ... 10° T 17 ... 18 ... 18 dB | Syst. bottom: 0° ... 5° ... 10° T 18 ... 18 ... 16 dB Syst. top: 2° ... 6° ... 10° T 17 ... 18 ... 17 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | > 28 dB | | | |
| Isolation: Intersystem | > 36 dB (790–960 // 1710–2690 MHz) > 36 dB (1710–2690 // 1710–2690MHz) | | | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | | 200 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | | 400 W (at 50 °C ambient temperature) | | | |
| Input | 6 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1380 / 520 / 1490 N | | | | | | | |
| Height/width/depth | 2622 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | | |
| Weight | 31 kg / 33 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

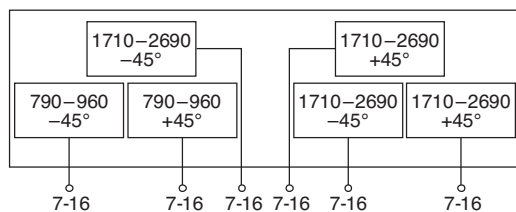

800/900 -
1800/2000/2600
XXXPol

Triple-band Panel

790–960 1710–1880 1920–2170

KATHREIN

Dual Polarization

X X X

Antennen · Electronic


Half-power Beam Width

65° 65° 65°

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 17.5/18/18dBi 0°–7°/0°–6°/0°–6°T

| Type No. | 742272v03 | | | |
|---|--|---|---|---|
| | 790–960 | | 1710–1880 | 1920–2170 |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1170 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain (dBi) | 16.9 ... 16.9 ... 16.8 | 17.3 ... 17.4 ... 17.2 | 17.8 ... 18.0 ... 17.8 | 17.9 ... 18.2 ... 17.9 |
| Tilt | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° |
| Horizontal Pattern: | | | | |
| Half-power beam width | 68° | 65° | 65° | 61° |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross polar ratio Maindirection 0° Sector ±60° | Typically: 30 dB > 10 dB | Typically: 30 dB > 10 dB | Typically: 25 dB > 10 dB | Typically: 25 dB > 10 dB |
| Tracking, Avg. | 1.0 dB | | 0.5 dB | 0.5 dB |
| Squint | ±2.5° | | ±2.5° | ±2.5° |
| Vertical Pattern: | | | | |
| Half-power beam width | 8.0° | 7.2° | 5.0° | 4.6° |
| Electrical tilt, contin. adjust. | 0°–7° | | 0°–6° | 0°–6° |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 4° ... 7° T ≥ 17 ... 17 ... 15 dB | 0° ... 4° ... 7° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB | 0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB |
| VSWR | < 1.5 | | < 1.5 | < 1.5 |
| Isolation: Intrasystem | > 30 dB | | > 30 dB | > 30 dB |
| Isolation: Intersystem | Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz) | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | < –150 dBc | < –150 dBc |
| Max. power per input Total power | 500 W* 1000 W* | | 250 W* 500 W* | 250 W* 500 W* |
| Input | 6 x 7-16 female (long neck) | | | |
| Connector position | Bottom | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1160 / 500 / 1210 N | | | |
| Height/width/depth | 2533 / 261 / 146 mm | | | |
| Category of mounting hardware | H (Heavy) | | | |
| Weight | 29 kg / 31 kg (clamps incl.) | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | |

clamps included

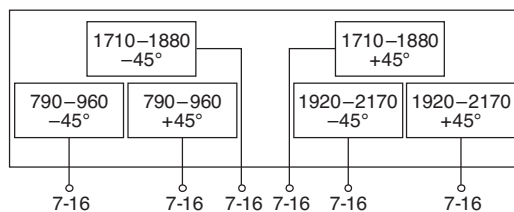

* (at 50 °C ambient temperature)

800/900 - 1800/2100/2600 XXXPol

Triple-band Panel

790–960 1710–1880 1920–2170

KATHREIN

Dual Polarization

X X X

Antennen · Electronic

Half-power Beam Width


65° 65° 65°

XXXPol Panel 790–960/1710–1880/1920–2170 C 65°/65°/65° 17.5/17.5/18dBi 0°–7°/0°–6°/0°–6°T

| Type No. | 80010672v01 | | | | |
|---|--|---------------|------------------|---|---|
| | 790–960 | | 1710–1880 | 1920–2170 | |
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1920 – 2170 MHz |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° |
| Gain | 2 x 17 dBi | 2 x 17.2 dBi | 2 x 17.5 dBi | 2 x 17.5 dBi | 2 x 18 dBi |
| Horizontal Pattern: | | | | | |
| Half-power beam width | 69° | 68° | 66° | 65° | 63° |
| Front-to-back ratio, copolar | > 25 dB | | > 25 dB | > 25 dB | > 25 dB |
| Cross polar ratio | Typically: 25 dB | | Typically: 14 dB | Typically: 17 dB | Typically: 17 dB |
| Maindirection | 0° | | 0° | | 0° |
| Sector | ±60° | | > 10 dB | | > 10 dB |
| Vertical Pattern: | | | | | |
| Half-power beam width | 7.4° | 7.2° | 6.8° | 4.7° | 4.4° |
| Electrical tilt, contin. adjust. | 0.5°–7° | | | 0°–6° | 0°–6° |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 4° ... 7° T 15 ... 16 ... 16 dB | | | 0° ... 3° ... 6° T 17 ... 17 ... 16 dB | 0° ... 3° ... 6° T 17 ... 15 ... 14 dB |
| VSWR | < 1.5 | | | | |
| Isolation: Intrasystem | > 30 dB | | | | |
| Isolation: Intersystem | Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170MHz) | | | | |
| Intermodulation IM3 (2 x 43 dBm carrier) | < –150 dBc | | | | < –150 dBc |
| Max. power per input | 250 W | | 200 W | 200 W | |
| | (at 50 °C ambient temperature) | | | | |
| Max. power per combined input | 450 W (at 50 °C ambient temperature) | | | | |
| Input | 4 x 7-16 female (long neck) | | | | |
| Connector position | Bottom | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 850 / 510 / 1270 N | | | | |
| Height/width/depth | 2628 / 262 / 149 mm | | | | |
| Category of mounting hardware | H (Heavy) | | | | |
| Weight | 32 kg / 34 kg (clamps incl.) | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | |
| Integrated combiner | The insertion loss is included in the given antenna gain values. | | | | |



800/900 -
1800/2000/2600
XXXPol

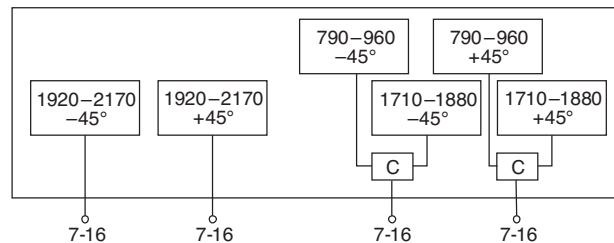

Triple-band Panel Dual Polarization Half-power Beam Width

790–960 1710–2180 1710–2180

KATHREIN


X X X

Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 17.5/17.5/17dBi 2°–10°/0°–10°/0°–10°T

| Type No. | 80010292v03 | | | | | | clamps included |
|--|--|--|--|--|--|--|-----------------|
| | 790–960 | | | 1710–2180 | 1710–2180 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain: (dBi) 1710–2180 MHz (Syst. bottom) 1710–2180 MHz (Syst. top) | 17.0 ... 17.0 ... 16.8 | 17.2 ... 17.2 ... 16.9 | 17.4 ... 17.4 ... 17.0 | 17.1 ... 17.2 ... 16.6 16.5 ... 16.7 ... 16.2 | 17.2 ... 17.4 ... 16.8 16.6 ... 16.8 ... 16.3 | 17.2 ... 17.3 ... 16.7 16.8 ... 17.0 ... 16.3 | |
| Tilt | 2° ... 6° ... 10° | 2° ... 6° ... 10° | 2° ... 6° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 69° | 68° | 66° | 65° | 62° | 61° | |
| Front-to-back ratio, copolar | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio Maindirection 0° Sector ±60° ±60° | Typically: 25 dB > 10 dB avg. 20 dB | Typically: 25 dB > 10 dB avg. 20 dB | Typically: 25 dB > 10 dB avg. 17 dB | Typically: 25 dB > 10 dB avg. 16 dB | Typically: 25 dB > 10 dB avg. 16 dB | Typically: 25 dB > 10 dB avg. 16 dB | |
| Tracking, Avg. 1710–2180 MHz (Syst. bottom) 1710–2180 MHz (Syst. top) | 1.0 dB | | | 1.0 dB 0.5 dB | | | |
| Squint | ±3.5° | | | ±3.5° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.8° | 7.6° | 7.1° | 7.6° | 7.5° | 6.8° | |
| Electrical tilt | 2°–10°, continuously adjustable | | | 0°–10°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam | 2° ... 6° ... 10° T 17 ... 16 ... 14 dB | 2° ... 6° ... 10° T 18 ... 16 ... 15 dB | 2° ... 6° ... 10° T 18 ... 16 ... 15 dB | 0° ... 5° ... 10° T 15 ... 16 ... 15 dB | 0° ... 5° ... 10° T 16 ... 16 ... 15 dB | 0° ... 5° ... 10° T 16 ... 16 ... 14 dB | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | < 1.5 | < 1.5 | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | > 30 dB | |
| Isolation: Intersystem | > 36 dB (790–960 // 1710–2180 MHz) > 36 dB (1710–2180 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | < –150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 250 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | | |
| Input | 6 x 7-16 female | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1210 / 510 / 1270 N | | | | | | |
| Height/width/depth | 2598 / 261 / 146 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 27 kg / 29 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

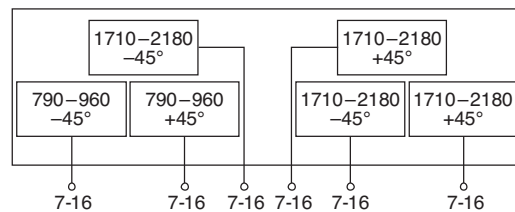

Triple-band Panel

Dual Polarization

Half-power Beam Width


790–960 1710–2180 1710–2180 **KATHREIN**

X X X Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 17.5/17/17dBi 4°–12°/0°–14°/0°–14°T

| Type No. | 80010492v01 | | | | | | clamps included |
|--------------------------------------|--|------------------------|------------------------|--------------------------------------|------------------------|------------------------|-----------------|
| | 790–960 | | | 1710–2180 | | 1710–2180 | |
| Frequency range | 790 – 866 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain: (dBi) | 16.6 ... 16.5 ... 16.3 | 17.0 ... 16.9 ... 16.5 | 17.2 ... 17.0 ... 16.7 | 16.1 ... 16.3 ... 16.0 | 16.7 ... 16.8 ... 16.3 | 17.0 ... 17.0 ... 16.6 | |
| 1710–2180 MHz (Syst. bottom) | | | | 16.1 ... 16.1 ... 15.8 | 16.7 ... 16.5 ... 16.2 | 17.0 ... 16.9 ... 16.4 | |
| 1710–2180 MHz (Syst. top) | | | | | | | |
| Tilt | 4° ... 8° ... 12° | 4° ... 8° ... 12° | 4° ... 8° ... 12° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | 0° ... 7° ... 14° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 66° | 65° | 63° | 60° | |
| Front-to-back ratio (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | |
| Maindirection | 23 dB | 24 dB | 25 dB | 18 dB | 18 dB | 19 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.2° | 7.8° | 7.6° | 7.2° | |
| Electrical tilt | 4°–12°, continuously adjustable | | | 0°–14°, continuously adjustable | | | |
| Sidelobe suppression | 4° ... 8° ... 12° T | 4° ... 8° ... 12° T | 4° ... 8° ... 12° T | 0° ... 7° ... 14° T | 0° ... 7° ... 14° T | 0° ... 7° ... 14° T | |
| – for firstsidelobe above main beam | 19 ... 17 ... 16 dB | 19 ... 18 ... 18 dB | 19 ... 18 ... 18 dB | 18 ... 17 ... 15 dB | 18 ... 17 ... 15 dB | 18 ... 17 ... 15 dB | |
| – within 0°–20° sector above horizon | 15 ... 15 ... 14 dB | 16 ... 15 ... 14 dB | 16 ... 15 ... 14 dB | 18 ... 17 ... 15 dB | 17 ... 17 ... 15 dB | 15 ... 14 ... 14 dB | |
| VSWR | < 1.5 | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | | | | |
| Isolation: Intersystem | > 36 dB (790–960 // 1710–2180 MHz) | | | | | | |
| | > 36 dB (1710–2180 // 1710–2180 MHz) | | | | | | |
| Intermodulation IM3 | < –153 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 400 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Input | 6 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 870 / 520 / 1320 N | | | | | | |
| Height/width/depth | 2694 / 262 / 149 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 34 kg / 36 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

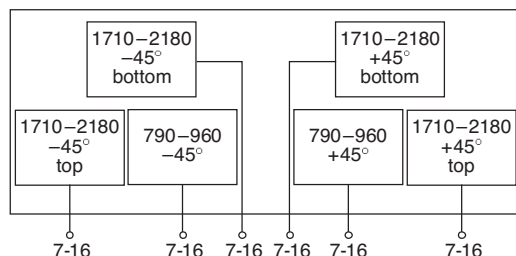

Triple-band Panel

790–960 1710–2170 2490–2690

KATHREIN

Dual Polarization

X X X

Antennen · Electronic


Half-power Beam Width

65° 65° 65°

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 15/17/16.5dBi 0°–16°/2°–10°/2°–10°

| Type No. | 80010674 | | | | | | | clamps included |
|--|--|--|--|--|--|--|--|-----------------|
| | 790–960 | | 1710–2170 | | | 2490–2690 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 14.5 ... 14.4 ... 14.2 | 14.6 ... 14.5 ... 14.3 | 14.8 ... 14.6 ... 14.4 | 17.0 ... 17.0 ... 16.6 | 17.2 ... 17.2 ... 16.8 | 17.2 ... 17.2 ... 16.7 | 16.3 ... 16.6 ... 15.8 | |
| Tilt | 0° ... 8° ... 16° | 0° ... 8° ... 16° | 0° ... 8° ... 16° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | 2° ... 5° ... 10° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 69° | 68° | 67° | 63° | 63° | 65° | 65° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 23 dB | Typically: 18 dB | Typically: 21 dB | Typically: 23 dB | Typically: 23 dB | |
| Main direction | 0° | | | | | | | |
| Sector | ±60° | > 9 dB | > 8 dB | > 9 dB | > 9 dB | > 10 dB | > 8 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 16.5° | 16.0° | 15° | 6.2° | 5.8° | 5.7° | 4.8° | |
| Electrical tilt, continuously adjust. | 0°–16° | | | 2°–10° | | | 2°–10° | |
| Min. sidelobe suppression for first sidelobe above main beam | 0° ... 8° ... 16° T 16 ... 15 ... 15 dB | 0° ... 8° ... 16° T 16 ... 15 ... 15 dB | 0° ... 8° ... 16° T 15 ... 15 ... 15 dB | 2° ... 5° ... 10° T 14 ... 14 ... 15 dB | 2° ... 5° ... 10° T 14 ... 15 ... 16 dB | 2° ... 5° ... 10° T 14 ... 16 ... 17 dB | 2° ... 5° ... 10° T 14 ... 16 ... 17 dB | |
| VSWR | < 1.5 | | | < 1.5 | | | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | > 30 dB | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2170 // 2490–2690MHz) | | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W* | | | 200 W* | | | 200 W* | |
| Total power | 1000 W* | | | 400 W* | | | 400 W* | |
| Input | 6 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 700 / 270 / 730 N | | | | | | | |
| Height/width/depth | 1403 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | | |
| Weight | 20 kg / 22 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

* (at 50 °C ambient temperature)

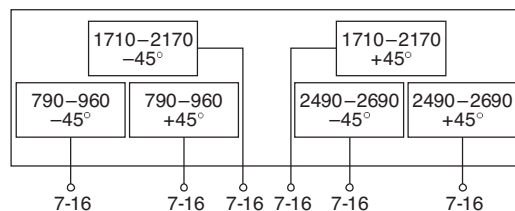

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2170 2490–2690

KATHREIN

X X X


Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 16/18/18dBi 0°–10°/0°–6°/0°–6°T

| Type No. | 80010675 | | | | | | | clamps included |
|--|--|--|--|---|---|---|---|-----------------|
| | 790–960 | | 1710–2170 | | | 2490–2690 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Average gain (dBi) | 16.0 ... 16.0 ... 15.5 | 16.1 ... 16.1 ... 15.6 | 16.0 ... 16.2 ... 15.6 | 18.0 ... 18.0 ... 17.6 | 18.0 ... 18.0 ... 17.5 | 18.1 ... 18.1 ... 17.4 | 17.8 ... 17.8 ... 17.6 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 63° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 27 dB | > 27 dB | > 27 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 22 dB | Typically: 22 dB | Typically: 22 dB | Typically: 18 dB | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction | 0° | | | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 10.3° | 10.1° | 9.8° | 4.8° | 4.6° | 4.4° | 3.5° | |
| Electrical tilt, continuously adjust. | 0°–10° | | | 0°–6° | | | 0°–6° | |
| Min. sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 18 ... 17 ... 15 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | | | < 1.5 | | | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | > 28 dB | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2170 // 2490–2690MHz) | | | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W* | | | 200 W* | | | 200 W* | |
| Total power | 1000 W* | | | 400 W* | | | 400 W* | |
| Input | 6 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1020 / 390 / 1050 N | | | | | | | |
| Height/width/depth | 1997 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | | |
| Weight | 26 kg / 28 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | | |

* (at 50 °C ambient temperature)

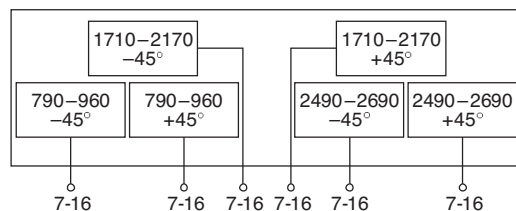

800/900 -
1800/2000/2600
XXXPol

Triple-band Panel Dual Polarization Half-power Beam Width

790–960 1710–2170 2490–2690

KATHREIN

X X X


Antennen · Electronic

65° 65° 65°

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 17/18/18dBi 0°–10°/0°–6°/0°–6°T

| Type No. | 80010676 | | | | | | | clamps included |
|--|--|---|---|---|---|---|---|-----------------|
| | 790–960 | | | 1710–2170 | | | 2490–2690 | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.8 ... 16.7 ... 16.5 | 17.0 ... 17.0 ... 16.8 | 17.1 ... 17.2 ... 17.0 | 18.0 ... 18.0 ... 17.6 | 18.0 ... 18.0 ... 17.5 | 18.1 ... 18.1 ... 17.4 | 17.8 ... 17.8 ... 17.6 | |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 63° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 24 dB | Typically: 23 dB | Typically: 22 dB | Typically: 18 dB | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction | 0° | | | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.1° | 4.8° | 4.6° | 4.4° | 3.5° | |
| Electrical tilt, continuously adjust. | 0.5°–9.5° | | | 0°–6° | | | 0°–6° | |
| Min. sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB | 0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB | 0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 18 ... 17 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2170 // 2490–2690MHz) | | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W* | | | 200 W* | | | 200 W* | |
| Total power | 1000 W* | | | 400 W* | | | 400 W* | |
| Input | 6 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1380 / 520 / 1490 N | | | | | | | |
| Height/width/depth | 2622 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | | |
| Weight | 31 kg / 33 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

* (at 50 °C ambient temperature)

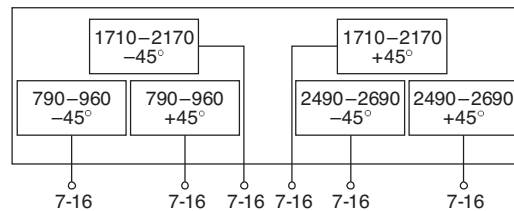

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2690 1710–2690

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2690/1710–2690 65°/65°/65° 16/16/16dBi 0°–10°/2°–12°/2°–12°T

| Type No. | 80010691 | | | | | | | clamps included |
|--|---|--|--|--|--|--|--|-----------------|
| | 790–960 | | | 1710–2690 | | 1710–2690 | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain: (dBi) | 16.0 ... 16.0 ... 15.5 | 16.1 ... 16.1 ... 15.6 | 16.0 ... 16.2 ... 15.6 | 15.5 ... 15.4 ... 15.2 | 15.6 ... 15.5 ... 15.2 | 16.0 ... 15.9 ... 15.2 | 16.0 ... 16.1 ... 15.9 | |
| 1710–2690 MHz (Syst. bottom) | | | | 15.3 ... 15.2 ... 14.9 | 15.4 ... 15.2 ... 14.9 | 15.9 ... 15.7 ... 15.0 | 15.7 ... 15.8 ... 15.4 | |
| 1710–2690 MHz (Syst. top) | | | | | | | | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 2° ... 7° ... 12° | 2° ... 7° ... 12° | 2° ... 7° ... 12° | 2° ... 7° ... 12° | |
| Horizontal Pattern: | | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 63° | 62° | 63° | 62° | |
| Front-to-back ratio, copolar (180°±30°) | > 27 dB | > 27 dB | > 27 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | |
| Main direction 0° | 22 dB | 22 dB | 22 dB | 18 dB | 22 dB | 24 dB | 20 dB | |
| Sector ±60° | > 10 dB | > 10 dB | > 10 dB | > 8 dB | > 9 dB | > 8 dB | > 8 dB | |
| Vertical Pattern: | | | | | | | | |
| Half-power beam width | 10.3° | 10.1° | 9.8° | 11° | 10° | 9.2° | 7.8° | |
| Electrical tilt | 0°–10°, continuously adjustable | | | 2°–12°, continuously adjustable | | | | |
| Min. sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° T 18 ... 17 ... 15 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 0° ... 5° ... 10° T 18 ... 18 ... 16 dB | 2° ... 7° ... 12° T 17 ... 18 ... 17 dB | 2° ... 7° ... 12° T 17 ... 16 ... 15 dB | 2° ... 7° ... 12° T 17 ... 16 ... 15 dB | 2° ... 7° ... 12° T 17 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | | | | | | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | | | | |
| Isolation: Intersystem | > 30 dB (790–960 // 1710–2690 MHz) > 30 dB (1710–2690 // 1710–2690MHz) | | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 200 W (at 50 °C ambient temperature) | | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 400 W (at 50 °C ambient temperature) | | | | |
| Input | 6 x 7-16 female (long neck) | | | | | | | |
| Connector position | Bottom | | | | | | | |
| Adjustment mechanism | 3x, Position bottom continuously adjustable | | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1020 / 390 / 1050 N | | | | | | | |
| Height/width/depth | 1997 / 300 / 152 mm | | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | | |
| Weight | 26 kg / 28 kg (clamps incl.) | | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | | |

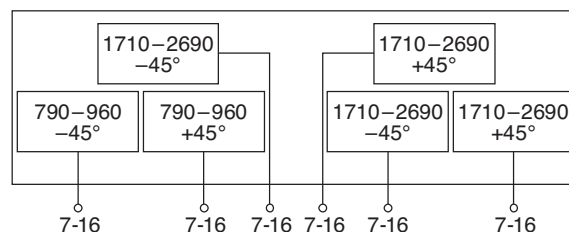

800/900 –
1800/2000/2600
XXXPol

Summary – Directional Antennas

Quad-band

800/900 – 1800/2000/2600

Dual Polarization +45°/-45°

| Type | Type No. | Height [mm] | Connector position | Page | | | | |
|---------------|-----------|-------------|--------------------|---------|-----------------|------|--------|-----|
| XXXXPol Panel | 790–960 | 65° | 16dBi | 0°–10°T | 80010825 | 1934 | bottom | 146 |
| | 790–960 | 65° | 16dBi | 0°–10°T | | | | |
| | 1710–2180 | 65° | 18.5dBi | 0°–6°T | | | | |
| | 1710–2180 | 65° | 18.5dBi | 0°–6°T | | | | |
| XXXXPol Panel | 790–960 | 65° | 17dBi | 0°–10°T | 80010826 | 2399 | bottom | 147 |
| | 790–960 | 65° | 17dBi | 0°–10°T | | | | |
| | 1710–2180 | 65° | 18.5dBi | 0°–6°T | | | | |
| | 1710–2180 | 65° | 18.5dBi | 0°–6°T | | | | |
| XXXXPol Panel | 790–862 | 65° | 16dBi | 0°–10°T | 80010805 | 1997 | bottom | 148 |
| | 880–960 | 65° | 16dBi | 0°–10°T | | | | |
| | 1710–2170 | 65° | 18dBi | 2°–8°T | | | | |
| | 2490–2690 | 65° | 18dBi | 2°–8°T | | | | |
| XXXXPol Panel | 790–960 | 65° | 16dBi | 0°–10°T | 80010685 | 1997 | bottom | 149 |
| | 1710–1880 | 65° | 18dBi | 0°–6°T | | | | |
| | 1920–2170 | 65° | 18dBi | 0°–6°T | | | | |
| | 2490–2690 | 65° | 18dBi | 0°–6°T | | | | |
| XXXXPol Panel | 790–960 | 65° | 17dBi | 0°–10°T | 80010686 | 2622 | bottom | 150 |
| | 1710–1880 | 65° | 18dBi | 0°–6°T | | | | |
| | 1920–2170 | 65° | 18dBi | 0°–6°T | | | | |
| | 2490–2690 | 65° | 18dBi | 0°–6°T | | | | |

New or changed product

When deploying
Quad-band Antennas,
please also consider using
special Quad-band Combiners
(see page 241)

2-Dual-band Panel

Dual Polarization

Half-power Beam Width

790-960 790-960 1710-2180 1710-2180

X X X X


65° 65° 60° 60°

KATHREIN

Antennen · Electronic

XXXXPol Panel 790-960/790-960/1710-2180/1710-2180 65°/65°/60°/60° 16/16/18.5/18.5dBi 0°-10°/0°-10°/0°-6°/0°-6°T

| Type No. | 80010825 | | | | | | clamps included |
|--|--|--|--|---|---|---|-----------------|
| | 790-960 | | | 1710-2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain (dBi) | 15.4 ... 15.7 ... 15.3 | 15.6 ... 16.0 ... 15.4 | 15.9 ... 16.1 ... 15.4 | 18.4 ... 18.5 ... 18.1 | 18.5 ... 18.7 ... 18.1 | 18.3 ... 18.5 ... 18.1 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 67° | 65° | 63° | 60° | 60° | 60° | |
| Front-to-back ratio, copolar | > 27 dB | > 27 dB | > 28 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | Typically: | Typically: | Typically: | Typically: | Typically: | Typically: | |
| Maindirection | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | ±60° | ±60° | ±60° | ±60° | ±60° | |
| Tracking, Avg. | 1.5 dB | | | 0.5 dB | | | |
| Squint | ±3.0° | | | ±2.5° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 11° | 10.7° | 10° | 5.0° | 4.8° | 4.6° | |
| Electrical tilt | 0°-10°, continuously adjustable | | | 0°-6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 17 dB | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 18 dB | 0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB | 0° ... 3° ... 6° T ≥ 16 ... 15 ... 14 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | | < 1.5 | | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | | |
| Isolation: Intersystem | > 30 dB (790-960 // 790-960 MHz) > 30 dB (790-960 // 1710-2180 MHz) > 30 dB (1710-2180 // 1710-2180 MHz) | | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 8 x 7-16 female | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 4x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1540 / 330 / 1790 N | | | | | | |
| Height/width/depth | 1934 / 576 / 133 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 36 kg / 38 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

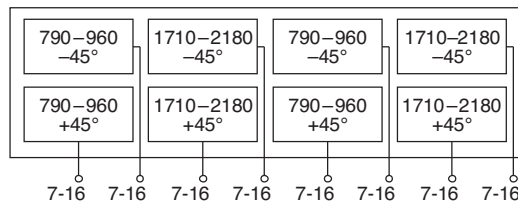

2-Dual-band Panel

790-960 790-960 1710-2180 1710-2180

KATHREIN

Dual Polarization

X X X X


Antennen · Electronic

Half-power Beam Width

65° 65° 60° 60°

XXXXPol Panel 790-960/790-960/1710-2180/1710-2180 65°/65°/60°/60° 17/17/18.5/18.5dBi 0°-7°/0°-7°/0°-6°/0°-6°T

| Type No. | 80010826 | | | | | | clamps included |
|--|--|---|---|---|---|---|-----------------|
| | 790-960 | | | 1710-2180 | | | |
| Frequency range | 790 – 862 MHz | 824 – 894 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2180 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Gain (dBi) | 16.3 ... 16.5 ... 16.2 | 16.6 ... 16.8 ... 16.3 | 16.6 ... 17.0 ... 16.4 | 18.5 ... 18.5 ... 18.1 | 18.5 ... 18.5 ... 18.1 | 18.4 ... 18.5 ... 18.1 | |
| Tilt | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 7° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 67° | 65° | 63° | 60° | 60° | 60° | |
| Front-to-back ratio, copolar | > 27 dB | > 27 dB | > 28 dB | > 30 dB | > 30 dB | > 30 dB | |
| Cross polar ratio | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | Typically: 25 dB | |
| Maindirection | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Tracking, Avg. | 1.5 dB | | | 0.5 dB | | | |
| Squint | ±3.0° | | | ±2.5° | | | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.7° | 7.5° | 7.2° | 5.0° | 4.8° | 4.6° | |
| Electrical tilt | 0°-7°, continuously adjustable | | | 0°-6°, continuously adjustable | | | |
| Sidelobe suppression for first sidelobe above main beam avg. | 0° ... 3° ... 7° T ≥ 16 ... 17 ... 16 dB | 0° ... 3° ... 7° T ≥ 15 ... 17 ... 18 dB | 0° ... 3° ... 7° T ≥ 15 ... 17 ... 18 dB | 0° ... 3° ... 6° T ≥ 16 ... 15 ... 14 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | 0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB | |
| VSWR | < 1.5 | | | < 1.5 | | | |
| Isolation: Intrasystem | > 30 dB | | | > 30 dB | | | |
| Isolation: Intersystem | > 30 dB (790-960 // 790-960 MHz) > 30 dB (790-960 // 1710-2180 MHz) > 30 dB (1710-2180 // 1710-2180 MHz) | | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | < -150 dBc (2 x 43 dBm carrier) | | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | | 250 W (at 50 °C ambient temperature) | | | |
| Total power | 1000 W (at 50 °C ambient temperature) | | | 500 W (at 50 °C ambient temperature) | | | |
| Input | 8 x 7-16 female | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 4x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1930 / 410 / 2200 N | | | | | | |
| Height/width/depth | 2399 / 576 / 133 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 44 kg / 46 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 – 115 mm diameter | | | | | | |

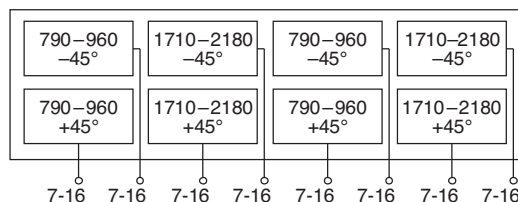

800/900 -
1800/2000/2600
XXXXPol

Quad-band Panel

Dual Polarization

Half-power Beam Width

790–862 880–960 1710–2170 2490–2690

KATHREIN

X X X X


Antennen · Electronic

65° 65° 65° 65°

XXXXPol Panel 790–862/880–960/1710–2170/2490–2690 65°/65°/65°/65° 16/16/18/18dBi 0°–10°/0°–10°/2°–8°/2°–8°T

| Type No. | 80010805 | | | | | | clamps included |
|---|--|--|---|---|---|---|-----------------|
| | 790–862 | 880–960 | 1710–2170 | | 2490–2690 | | |
| Frequency range | 790 – 862 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1850 – 1990 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 15.8 ... 15.8 ... 15.4 | 15.7 ... 15.9 ... 15.3 | 18.0 ... 18.0 ... 17.6 | 18.0 ... 18.0 ... 17.5 | 18.1 ... 18.1 ... 17.4 | 17.8 ... 17.8 ... 17.6 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 2° ... 4° ... 8° | 2° ... 4° ... 8° | 2° ... 4° ... 8° | 2° ... 4° ... 8° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 65° | 62° | 63° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 27 dB | > 27 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 22 dB | Typically: 22 dB | Typically: 18 dB | Typically: 22 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 10.3° | 9.8° | 4.8° | 4.6° | 4.4° | 3.5° | |
| Electrical tilt, continuously adjust. | 0°–10° | 0°–10° | 2°–8° | | 2°–8° | | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° 18 ... 17 ... 15 dB | 0° ... 5° ... 10° 18 ... 18 ... 16 dB | 2° ... 4° ... 8° 18 ... 16 ... 16 dB | 2° ... 4° ... 8° T 18 ... 18 ... 17 dB | 2° ... 4° ... 8° T 18 ... 17 ... 17 dB | 2° ... 4° ... 8° T 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | < 1.5 | < 1.5 | | < 1.5 | | |
| Isolation: Intrasystem | > 30 dB | > 30 dB | > 28 dB | | > 28 dB | | |
| Isolation: Intersystem | > 30 dB (790–862 // 880–960 // 1710–2170 // 2490–2690 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 250 W* | 250 W* | 200 W* | | 200 W* | | |
| Total power | 500 W* | 500 W* | 400 W* | | 400 W* | | |
| Input | 8 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 4x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1020 / 390 / 1050 N | | | | | | |
| Height/width/depth | 1997 / 300 / 152 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 29 kg / 31 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

*(at 50 °C ambient temperature)

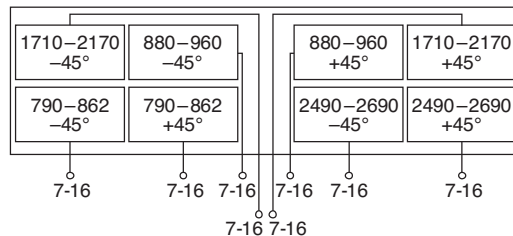

Quad-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170 2490–2690

KATHREIN

X X X X


Antennen · Electronic

65° 65° 65° 65°

XXXXPol Panel 790–960/1710–1880/1920–2170/2490–2690 65°/65°/65°/65° 16/18/18/18dBi 0°–10°/0°–6°/0°–6°/0°–6°T

| Type No. | 80010685 | | | | | | clamps included |
|---|--|--|--|---|---|---|-----------------|
| Frequency range | 790 – 862 MHz | 824 – 896 MHz | 880 – 960 MHz | 1710 – 1880 MHz | 1920 – 2170 MHz | 2490 – 2690 MHz | |
| Polarization | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | +45°, –45° | |
| Average gain (dBi) | 16.0 ... 16.0 ... 15.5 | 16.1 ... 16.1 ... 15.6 | 16.0 ... 16.2 ... 15.6 | 17.8 ... 17.8 ... 17.5 | 17.8 ... 17.8 ... 17.4 | 17.8 ... 17.8 ... 17.6 | |
| Tilt | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 5° ... 10° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 27 dB | > 27 dB | > 27 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 22 dB | Typically: 22 dB | Typically: 22 dB | 18 dB | 23 dB | Typically: 25 dB | |
| Main direction | 0° | 0° | 0° | 0° | 0° | 0° | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 10.3° | 10.1° | 9.8° | 4.8° | 4.4° | 3.5° | |
| Electrical tilt, continuously adjust. | 0°–10° | | | 0°–6° | | 0°–6° | |
| Sidelobe suppression for first sidelobe above main beam | 0° ... 5° ... 10° 18 ... 17 ... 15 dB | 0° ... 5° ... 10° 18 ... 18 ... 16 dB | 0° ... 5° ... 10° 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | | | < 1.5 | < 1.5 | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | > 28 dB | > 28 dB | |
| Isolation: Intersystem | > 30 dB (1710–1880 // 1920–2170 MHz) > 35 dB (790–960 // 1710–2170 MHz) > 38 dB (2490–2690 // 790–960 ... 1710–2170 MHz) | | | | | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 500 W* | | | 200 W* | 200 W* | 200 W* | |
| Total power | 1000 W* | | | 400 W* | | | |
| Input | 8 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 4x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1020 / 390 / 1050 N | | | | | | |
| Height/width/depth | 1997 / 300 / 152 mm | | | | | | |
| Category of mounting hardware | M (Medium) | | | | | | |
| Weight | 29 kg / 31 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 50 – 115 mm diameter | | | | | | |

*(at 50 °C ambient temperature)

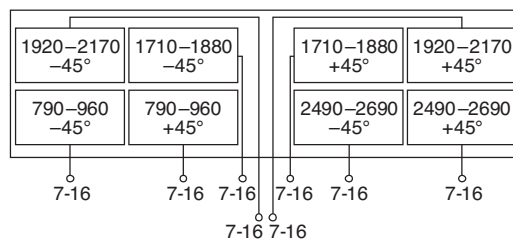

800/900 -
1800/2000/2600
XXXXPol

Quad-band Panel

Dual Polarization

Half-power Beam Width

790-960 1710-1880 1920-2170 2490-2690

KATHREIN

X X X X


Antennen · Electronic

65° 65° 65° 65°

XXXXPol Panel 790-960/1710-1880/1920-2170/2490-2690 65°/65°/65°/65° 17/18/18/18dBi 0°-10°/0°-6°/0°-6°/0°-6°T

| Type No. | 80010686 | | | | | | clamps included |
|---|--|---|---|---|---|---|-----------------|
| Frequency range | 790 - 862 MHz | 824 - 896 MHz | 880 - 960 MHz | 1710 - 1880 MHz | 1920 - 2170 MHz | 2490 - 2690 MHz | |
| Polarization | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | +45°, -45° | |
| Average gain (dBi) | 16.8 ... 16.7 ... 16.5 | 17.0 ... 17.0 ... 16.8 | 17.1 ... 17.2 ... 17.0 | 17.8 ... 17.8 ... 17.5 | 17.8 ... 17.8 ... 17.4 | 17.8 ... 17.8 ... 17.6 | |
| Tilt | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0.5° ... 5° ... 9.5° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | 0° ... 3° ... 6° | |
| Horizontal Pattern: | | | | | | | |
| Half-power beam width | 68° | 67° | 65° | 62° | 62° | 63° | |
| Front-to-back ratio, copolar (180°±30°) | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | > 25 dB | |
| Cross polar ratio | Typically: 24 dB | Typically: 23 dB | Typically: 22 dB | Typically: 18 dB | Typically: 23 dB | Typically: 25 dB | |
| Main direction | 0° | | | | | | |
| Sector | ±60° | > 10 dB | > 10 dB | > 10 dB | > 10 dB | > 10 dB | |
| Vertical Pattern: | | | | | | | |
| Half-power beam width | 7.5° | 7.4° | 7.1° | 4.8° | 4.4° | 3.5° | |
| Electrical tilt, continuously adjust. | 0.5°-9.5° | | | 0°-6° | 0°-6° | 0°-6° | |
| Sidelobe suppression for first sidelobe above main beam | 0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB | 0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB | 0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB | 0° ... 3° ... 6° T 18 ... 16 ... 16 dB | 0° ... 3° ... 6° T 18 ... 17 ... 17 dB | 0° ... 3° ... 6° T 18 ... 18 ... 18 dB | |
| VSWR | < 1.5 | | | < 1.5 | < 1.5 | < 1.5 | |
| Isolation: Intrasystem | > 30 dB | | | > 28 dB | > 28 dB | > 28 dB | |
| Isolation: Intersystem | > 30 dB (1710-1880 // 1920-2170 MHz) > 35 dB (790-960 // 1710-2170 MHz) > 38 dB (2490-2690 // 790-960 ... 1710-2170 MHz) | | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | | | |
| Max. power per input | 500 W* | | | 200 W* | 200 W* | 200 W* | |
| Total power | 1000 W* | | | 400 W* | | | |
| Input | 8 x 7-16 female (long neck) | | | | | | |
| Connector position | Bottom | | | | | | |
| Adjustment mechanism | 4x, Position bottom continuously adjustable | | | | | | |
| Wind load (at 150 km/h) | Frontal / lateral / rearside: 1380 / 520 / 1490 N | | | | | | |
| Height/width/depth | 2622 / 300 / 152 mm | | | | | | |
| Category of mounting hardware | H (Heavy) | | | | | | |
| Weight | 34 kg / 36 kg (clamps incl.) | | | | | | |
| Scope of supply | Panel and 2 units of clamps for 42 - 115 mm diameter | | | | | | |

* (at 50 °C ambient temperature)

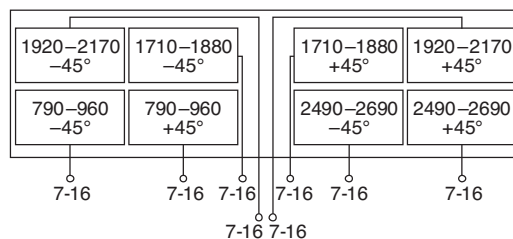

Vertical Polarization – 800/900

| Type | Type No. | Connector female | Height [mm] | Remarks | Page | |
|-----------|--------------------------|------------------|-------------|---------|----------------|-----|
| VPol Omni | 870–960 360° 2dBi 0°T | 738450 | N | 180 | indoor/outdoor | 152 |
| VPol Omni | 806–960 360° 2dBi 0°T | K751161 | N | 348 | | 153 |
| VPol Omni | 890–960 360° 5dBi 0°T | K7515641 | N | 715 | | 154 |
| VPol Omni | 870–960 360° 8dBi 0°T | 736350 | 7-16 | 1543 | | 155 |
| VPol Omni | 790–862 360° 11dBi 0°T | 80010850 | 7-16 | 3237 | | 156 |
| VPol Omni | 860–894 360° 11dBi 0°T | 738192 | 7-16 | 3237 | | 157 |
| VPol Omni | 870–960 360° 11dBi 0°T | 736347 | 7-16 | 3033 | | 158 |
| VPol Omni | 870–960 360° 10.5dBi 5°T | 736349 | 7-16 | 2954 | | 159 |

Vertical Polarization – Dual band

| | | | | | | |
|------------|--|----------|------|------|-----------------|-----|
| VVPol Omni | 790–862 360° 8dBi 0°T 870–960 360° 9dBi 0°T | 80010747 | 7-16 | 3237 | separate inputs | 160 |
| VPol Omni | 890–960/1710–1880 360° 2dBi 0°T | 738449 | N | 216 | indoor/outdoor | 176 |
| VPol Omni | 824–960/1805–2170 360° 2dBi 0°T | 80010147 | N | 216 | indoor/outdoor | 178 |
| VVPol Omni | 870–960 360° 9dBi 0°T 1920–2170 360° 10dBi 0°T | 80010274 | 7-16 | 3033 | separate inputs | 161 |
| VVPol Omni | 870–960/1710–1880 360° 2dBi 0°T 1920–2170 360° 2dBi 0°T | 80010111 | N | 493 | separate inputs | 162 |

Vertical Polarization – 1800

| | | | | | | |
|-----------|--------------------------|--------|------|------|--|-----|
| VPol Omni | 1710–1880 360° 11dBi 0°T | 738187 | 7-16 | 1568 | | 163 |
|-----------|--------------------------|--------|------|------|--|-----|

Vertical Polarization – 1800/2000/2500/3500

| | | | | | | |
|-----------|--------------------------|----------|------|------|--|-----|
| VPol Omni | 1710–2700 360° 2dBi 0°T | 80010431 | N | 115 | | 177 |
| VPol Omni | 1920–2170 360° 11dBi 0°T | 741790 | 7-16 | 1387 | | 164 |
| VPol Omni | 2500–2700 360° 11dBi 0°T | 80010442 | 7-16 | 1132 | | 165 |

New or changed product

Omnidirectional Antenna Vertical Polarization

870–960


V

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 2dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 738450 |
| Input | N female |
| Connector position | Bottom or top |
| Frequency range | 870 – 960 MHz |
| VSWR | < 1.5 |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Polarization | Vertical |
| Max. power | 100 W (at 50 °C ambient temperature) |
| Weight | 200 g |
| Radome diameter | 20 mm |
| Height | 180 mm |

- Material:** Radiator: Brass.
Radome: Fiberglass, colour: White.
- Mounting:** One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.



Vertical Pattern

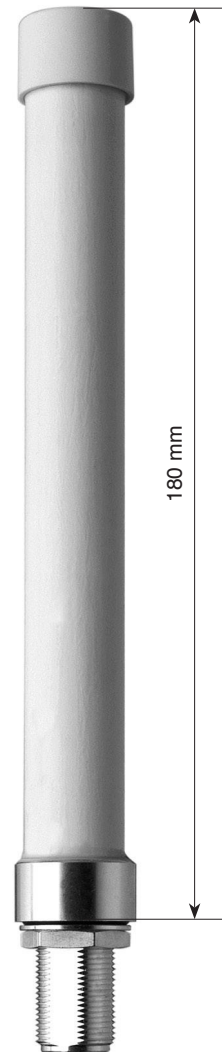

Omnidirectional Antenna Vertical Polarization

806–960



V

KATHREIN
Antennen · Electronic


VPol Omni 806–960 360° 2dBi

| | |
|---------------------|--------------------------------------|
| Type No. | K751161 |
| Frequency range | 806 – 960 MHz |
| Polarization | Vertical |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 100 W (at 50 °C ambient temperature) |


- Mounting:** The antenna can be attached in two ways with the supplied mounting kit:
1. On the tip of a tubular mast of 40 – 54 mm diameter (connecting cable runs inside the mast).
 2. Laterally at the tip of a tubular mast of 20 – 54 mm diameter (connecting cable runs outside the mast).
- Material:** Radiator: Brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.

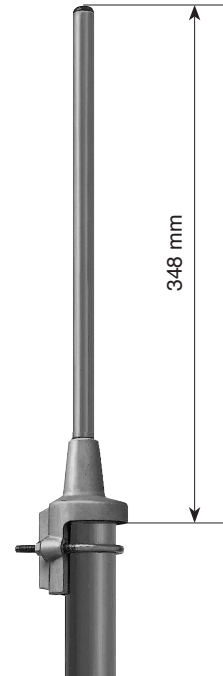

Vertical Pattern



On the tip



Laterally at the tip

Mechanical specifications

| | |
|--------------------|--------------------|
| Input | N female |
| Connector position | Bottom |
| Weight | 0.74 kg |
| Radome diameter | 21 mm |
| Wind load | 17 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 455 x 112 x 97 mm |
| Height | 348 mm |

Omnidirectional Antenna Vertical Polarization

890–960



V

KATHREIN
Antennen · Electronic


VPol Omni 890–960 360° 5dBi

| | |
|---------------------|--------------------------------------|
| Type No. | K7515641 |
| Frequency range | 890 – 960 MHz |
| Polarization | Vertical |
| Gain | 5 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 250 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached in two ways with the supplied mounting kit:
1. On the tip of a tubular mast of 40 – 54 mm diameter (connecting cable runs inside the mast).
 2. Laterally at the tip of a tubular mast of 20 – 54 mm diameter (connecting cable runs outside the mast).
- Material:** Radiator: Brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.

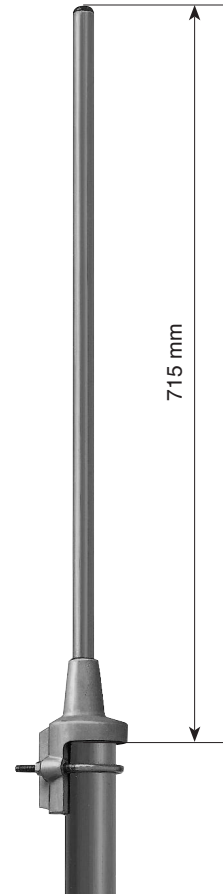

Vertical Pattern

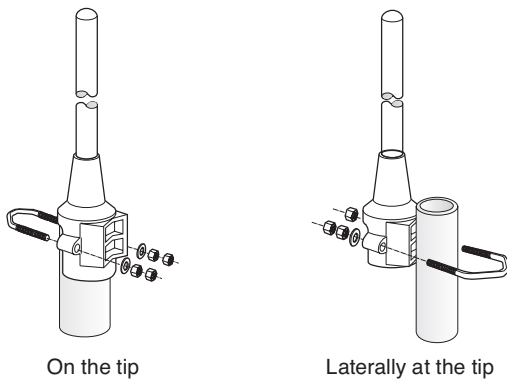

On the tip

Laterally at the tip

Mechanical specifications

| | |
|--------------------|--------------------|
| Input | N female |
| Connector position | Bottom |
| Weight | 0.90 kg |
| Radome diameter | 21 mm |
| Wind load | 20 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 825 x 112 x 97 mm |
| Height | 715 mm |

Omnidirectional Antenna Vertical Polarization

870–960



V

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 8dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 736350 |
| Frequency range | 870 – 960 MHz |
| Polarization | Vertical |
| Gain | 8 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

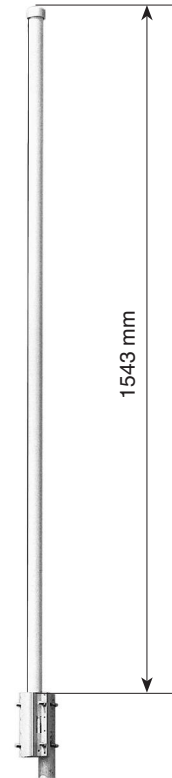

Vertical Pattern

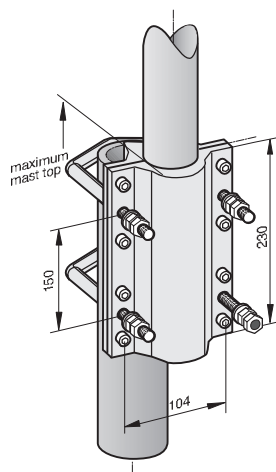

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 5.5 kg |
| Radome diameter | 51 mm |
| Wind load | 130 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 1846 x 148 x 112 mm |
| Height | 1543 mm |

Omnidirectional Antenna Vertical Polarization

790–862



V

KATHREIN
Antennen · Electronic


VPol Omni 790–894 360° 11dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 80010850 |
| Frequency range | 790 – 862 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

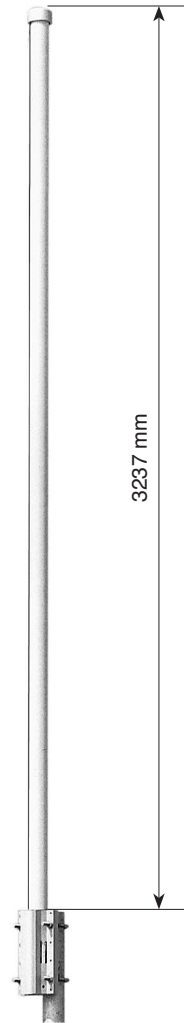

Vertical Pattern

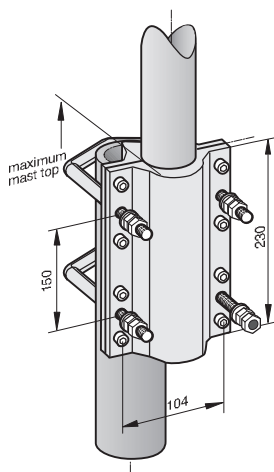

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 8.5 kg |
| Radome diameter | 51 mm |
| Wind load | 230 N (at 150 km/h) |
| Max. wind velocity | 180 km/h |
| Packing size | 3516 x 148 x 112 mm |
| Height | 3237 mm |

Omnidirectional Antenna Vertical Polarization

806–894



V

KATHREIN
Antennen · Electronic


VPol Omni 806–894 360° 11dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 738192 |
| Frequency range | 806 – 894 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

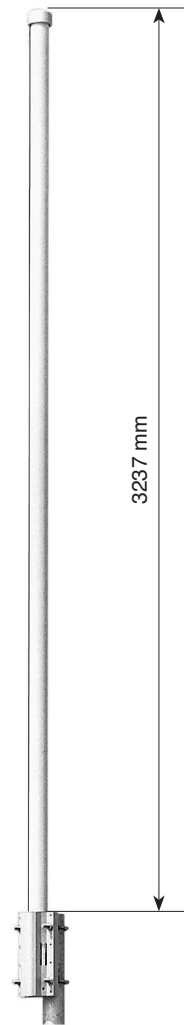

Vertical Pattern

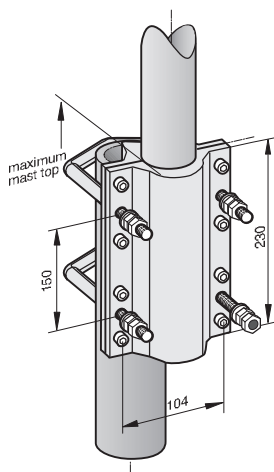

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 8.5 kg |
| Radome diameter | 51 mm |
| Wind load | 230 N (at 150 km/h) |
| Max. wind velocity | 180 km/h |
| Packing size | 3516 x 148 x 112 mm |
| Height | 3237 mm |

Omnidirectional Antenna Vertical Polarization

870–960



V

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 11dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 736347 |
| Frequency range | 870 – 960 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

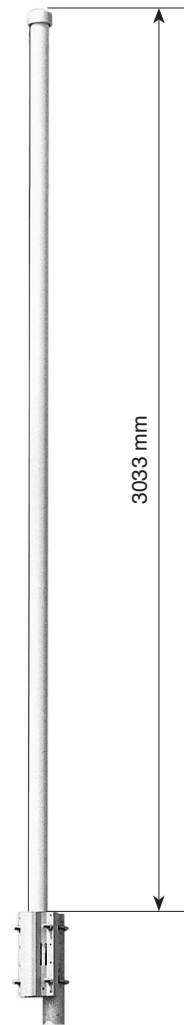

Vertical Pattern

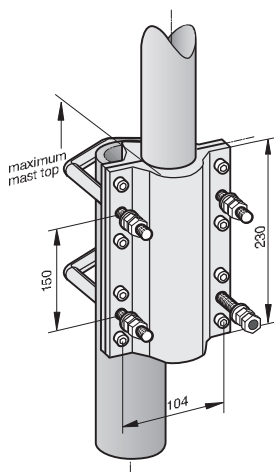

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 8 kg |
| Radome diameter | 51 mm |
| Wind load | 210 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 3316 x 148 x 112 mm |
| Height | 3033 mm |

Omnidirectional Antenna Vertical Polarization Fixed Electrical Downtilt

870–960

V



5°

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 10.5dBi 5°T

| | |
|---------------------|--------------------------------------|
| Type No. | 736349 |
| Frequency range | 870 – 960 MHz |
| Polarization | Vertical |
| Gain | 10.5 dBi |
| Electrical tilt | 5°, fixed |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 500 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

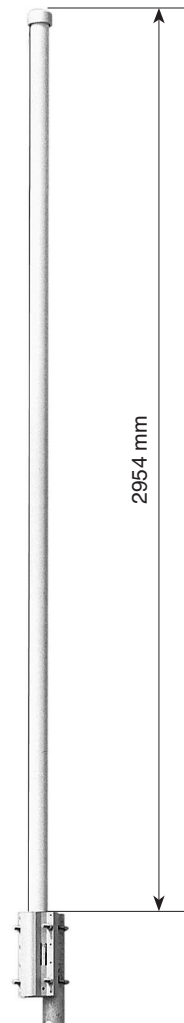

Vertical Pattern
5° electrical downtilt

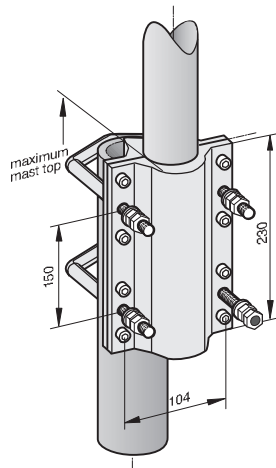

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 8 kg |
| Radome diameter | 51 mm |
| Wind load | 210 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 3316 x 148 x 112 mm |
| Height | 2954 mm |

Dual-band Omni Antenna Vertical Polarization

870–960

790–862

V

V

KATHREIN
Antennen · Electronic

VPol Omni 870–960/790–862 360°/360° 9/8dBi








| | | |
|--------------------------|-----------------------------------|---|
| Type No. | 80010747 | |
| Frequency range | Top system: 870 – 960 MHz | Bottom system: 790 – 862 MHz |
| Polarization | Vertical | Vertical |
| Gain | 9 dBi | 8 dBi |
| Half-power beam width | Horizontal: Omni Vertical: 11° | Horizontal: Omni Vertical: 16° |
| Isolation, between ports | > 30 dB | |
| Impedance | 50 Ω | |
| VSWR | < 1.5 | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 150 W | 100 W (at 50 °C ambient temperature) |

Mounting: The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).

Material: Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.

Anti-static protection: All metal parts of the antenna as well as the supplied clamp attachment are grounded. The inner conductors of both systems are coupled capacitively.

Lightning protection: The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

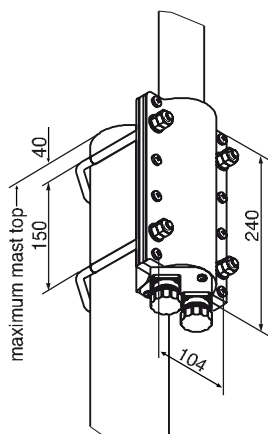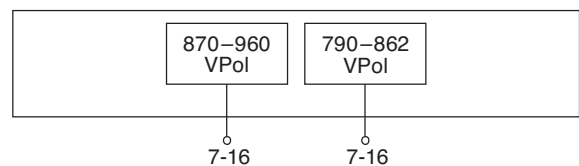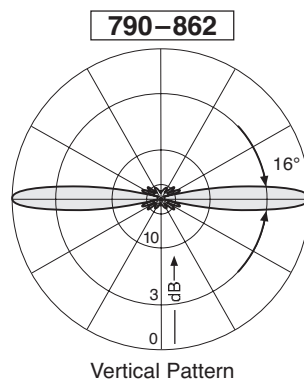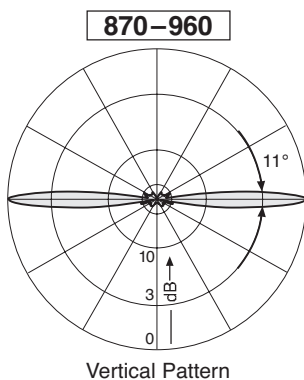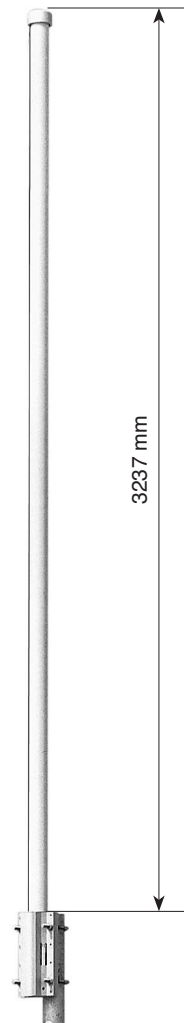

| Mechanical specifications | |
|---------------------------|---------------------|
| Input | 2 x 7-16 female |
| Connector position | Bottom |
| Weight | 8 kg |
| Wind load | 230 N (at 150 km/h) |
| Max. wind velocity | 180 km/h |
| Packing size | 3516 x 148 x 112 mm |
| Height | 3237 mm |
| Radome diameter | 51 mm |

Dual-band Omni Antenna Vertical Polarization

870–960

1920–2170

V

V

KATHREIN
Antennen · Electronic

VPol Omni 870–960/1920–2170 360°/360° 9/10dBi








| | | |
|--------------------------|-----------------------------------|---|
| Type No. | 80010274 | |
| Frequency range | Top system: 870 – 960 MHz | Bottom system: 1920 – 2170 MHz |
| Polarization | Vertical | Vertical |
| Gain | 9 dBi | 10 dBi |
| Half-power beam width | Horizontal: Omni Vertical: 11° | Horizontal: Omni Vertical: 9° |
| Isolation, between ports | > 30 dB | |
| Impedance | 50 Ω | |
| VSWR | < 1.5 | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 150 W | 100 W (at 50 °C ambient temperature) |

Mounting: The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).

Material: Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.

Anti-static protection: All metal parts of the antenna as well as the supplied clamp attachment are grounded. The inner conductors of both systems are coupled capacitively.

Lightning protection: The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

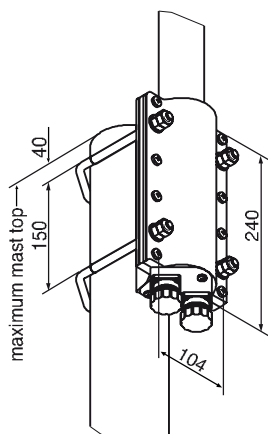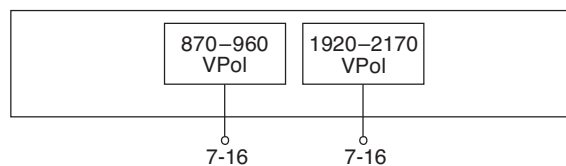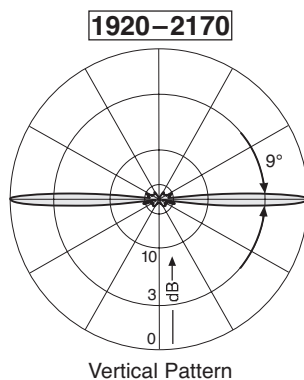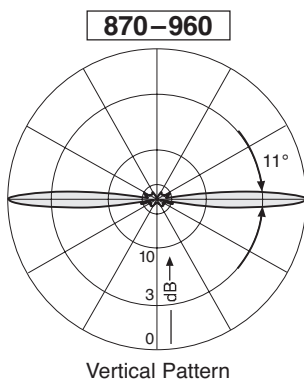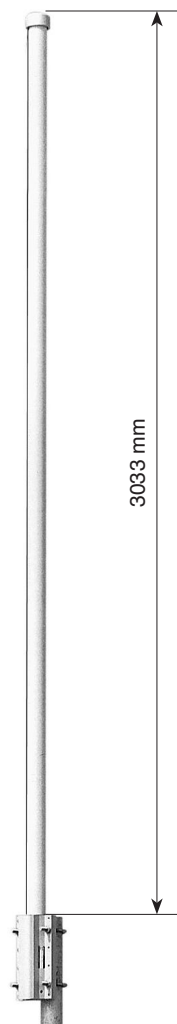

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 2 x 7-16 female |
| Connector position | Bottom |
| Weight | 8 kg |
| Wind load | 230 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 3380 x 148 x 112 mm |
| Height | 3033 mm |
| Radome diameter | 51 mm |

Multi-band Omni Antenna

870–960
1710–1880

1920–2170

KATHREIN

Antennen · Electronic

Vertical Polarization



V

V



VVPol Omni 870–960/1710–1880/1920-2170 360°/360° 2/2dBi

| Type No. | 80010111 | |
|--------------------------|---|-----------------------------------|
| Frequency range | Top system: 870 – 960 MHz 1710 – 1880 MHz | Bottom system: 1920 – 2170 MHz |
| Polarization | Vertical | Vertical |
| Gain | 2 dBi | 2 dBi |
| Isolation, between ports | > 25 dB | > 25 dB |
| Impedance | 50 Ω | 50 Ω |
| VSWR | < 1.5 | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | |
| Max. power per input | 50 W (at 50 °C ambient temperature) | |


- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 40 – 70 mm diameter with a mounting clamp supplied with the antenna. The connecting cables (not supplied) run outside the mast.
- Excellent grounding:** The metal parts of the antenna and the mounting kit (exclusive the inner conductor of the upper unit) are DC grounded.

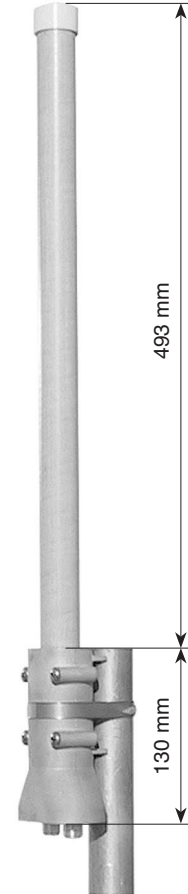

Vertical Pattern

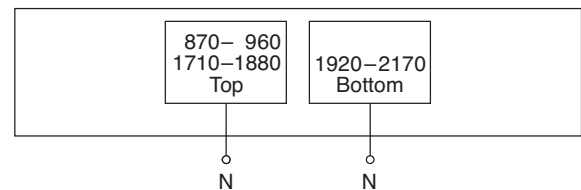

Layout of interface

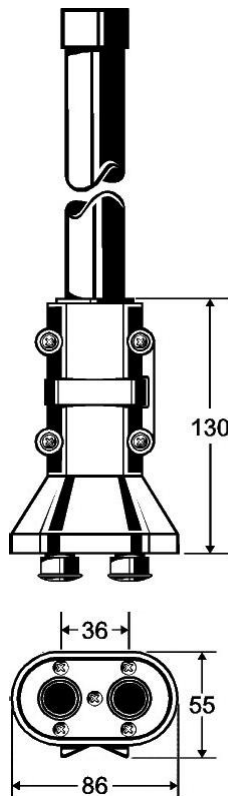

Bottom view

| Mechanical specifications | |
|---------------------------|--------------------|
| Input | 2 x N female |
| Connector position | Bottom |
| Weight | 0.85 kg |
| Wind load | 30 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 665 x 112 x 97 mm |
| Height | 493 mm |
| Radome diameter | 30 mm |

Omnidirectional Antenna Vertical Polarization

1710–1880



V

KATHREIN
Antennen · Electronic


VPol Omni 1710–1880 360° 11dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 738187 |
| Frequency range | 1710 – 1880 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 200 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

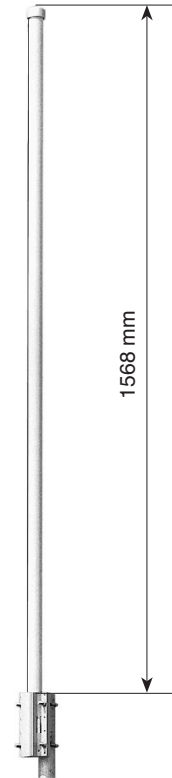

Vertical Pattern

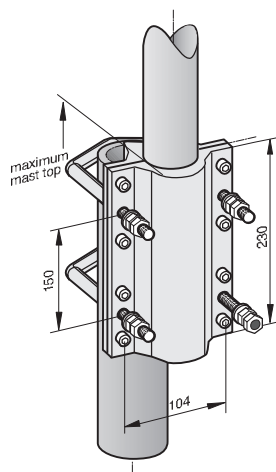

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 5.5 kg |
| Radome diameter | 51 mm |
| Wind load | 130 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 1846 x 148 x 112 mm |
| Height | 1568 mm |

Omnidirectional Antenna Vertical Polarization

1920–2170



V

KATHREIN
Antennen · Electronic


VPol Omni 1920–2170 360° 11dBi

| | |
|---------------------|--------------------------------------|
| Type No. | 741790 |
| Frequency range | 1920 – 2170 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 150 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

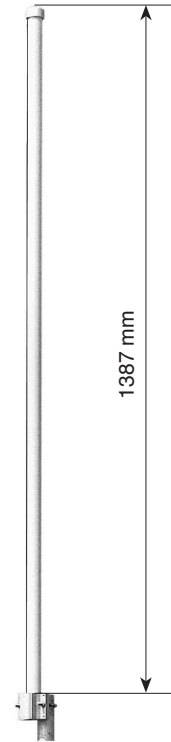

Vertical Pattern

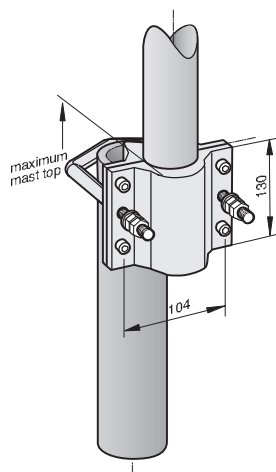

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 5 kg |
| Radome diameter | 51 mm |
| Wind load | 120 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 1570 x 148 x 112 mm |
| Height | 1387 mm |

Omnidirectional Antenna Vertical Polarization

2500–2700



V

KATHREIN
Antennen · Electronic


VPol Omni 2500–2700 360° 11dBi 0°T

| | |
|---------------------|--------------------------------------|
| Type No. | 80010442 |
| Frequency range | 1920 – 2170 MHz |
| Polarization | Vertical |
| Gain | 11 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Max. power | 200 W (at 50 °C ambient temperature) |

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

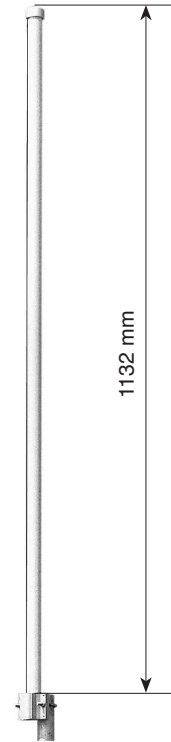

Vertical Pattern

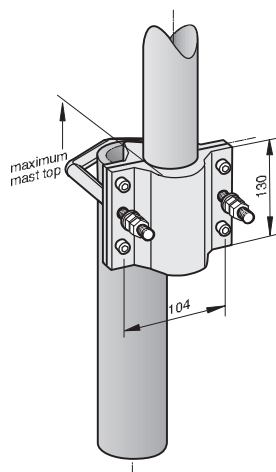

Mechanical specifications

| | |
|--------------------|---------------------|
| Input | 7-16 female |
| Connector position | Bottom |
| Weight | 4.5 kg |
| Radome diameter | 51 mm |
| Wind load | 110 N (at 150 km/h) |
| Max. wind velocity | 200 km/h |
| Packing size | 1232 x 148 x 112 mm |
| Height | 1132 mm |

Vertical Polarization Indoor – Directional

| Type | Type No. | Frequency range | Connector female | Page |
|-----------------------|----------|-------------------|------------------|------|
| VPol BiDir 65° 5dBi | 738446 | 790–960/1710–2170 | N | 57 |
| VVPol Indoor 90° 7dBi | 80010465 | 790–960/1710–2700 | N | 168 |

Indoor – Directional Dual Polarization

| | | | | |
|-------------------------|----------|-------------------|-------|-----|
| VXPol Indoor 90° C 7dBi | 80010677 | 790–960/1710–2700 | 2 x N | 169 |
|-------------------------|----------|-------------------|-------|-----|

Indoor – Multi-band Omnidirectional

| | | | | |
|-----------------------|----------|-----------------------------|---|-----|
| VPol Indoor 360° 2dBi | 80010748 | 876–960/1710–2700 | N | 170 |
| VPol Indoor 360° 2dBi | 80010749 | 876–960/1710–2700 | N | 171 |
| VPol Indoor 360° 2dBi | 80010249 | 790–960/1425–3800/5150–6000 | N | 172 |
| VPol Indoor 360° 2dBi | 741573 | 1710–2700 | N | 173 |
| VPol Indoor 360° 2dBi | 80010430 | 1710–6000 | N | 174 |

Indoor – Omnidirectional Dual Polarization

| | | | | |
|------------------------|----------|-----------------------------|-------|-----|
| VHPol Indoor 360° 2dBi | 80010709 | 790–960/1710–2700/2500–2700 | 2 x N | 175 |
|------------------------|----------|-----------------------------|-------|-----|

Indoor / Outdoor – Single-band

| | | | | |
|---------------------|--------|---------|---|-----|
| VPol Omni 360° 2dBi | 738450 | 870–960 | N | 152 |
|---------------------|--------|---------|---|-----|

Indoor / Outdoor – Dual-band Multi-band

| | | | | |
|---------------------|----------|-------------------|---|-----|
| VPol Omni 360° 2dBi | 738449 | 870–960/1710–1880 | N | 176 |
| VPol Omni 360° 2dBi | 80010431 | 1710–2700 | N | 177 |
| VPol Omni 360° 2dBi | 80010147 | 824–960/1805–2170 | N | 178 |

**Indoor Multi-band
Directional Antenna
Vertical Polarization
Half-power Beam Width
Integrated Combiner**

790–960 1710–2700

V V


90° 90°

C


KATHREIN
Antennen · Electronic

VVPol Indoor 790–960/1710–2700 C 90° 7dBi

| | |
|-----------------------|--|
| Type No. | 80010465 |
| Frequency range | 790 – 960 MHz / 1710 – 2700 MHz |
| Polarization | Vertical |
| Gain | Approx. 7 dBi |
| Half-power beam width | Horizontal: Approx. 90° |
| Impedance | 50 Ω |
| VSWR | 790 – 806 MHz: < 2.2 806 – 960 MHz: < 2.0 1710 – 2700 MHz: < 2.0 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | Cable RG 223/CU of 1m length, white, with N female connector |
| Protection class | IP 30 |
| Weight | 500 g |
| Packing size | 363 x 152 x 62 mm |
| Height/width/depth | 231 / 140 / 50 mm |



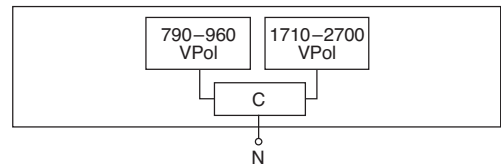


- Material:** Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
Mounting plates: Stainless steel.
- Mounting:** Two holes of 6 mm diameter in the mounting plate. Screws are not supplied.
Avoid stressing the cable.
No stress on the hexagonal crimp.
Minimum cable bending radius: 30 mm without tensile load.
- Grounding:** All metal parts inclusive the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).



Horizontal Pattern

Mounting:

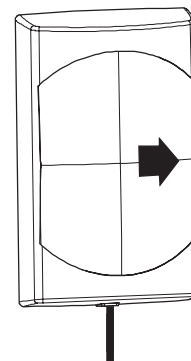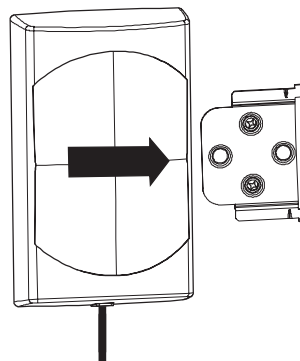

Mount the attachment plate to the wall using two screws of 4 mm diameter in the position as indicated.

Align the antenna over the attachment plate.

Pull the antenna to the stop.

Indoor Multi-band Directional Antenna

790–960 1710–2700 1710–2700

KATHREIN

Antennen · Electronic

Vertical / Dual Polarization

V

X (–45°)

X (+45°)

Half-power Beam Width

90°

90°

90°



Integrated Combiner

C

VXPol Indoor 790–960/1710–2700 C 90° 7dBi



| | | |
|--------------------------|---|-------------------|
| Type No. | 80010677 | |
| Frequency range | 790 – 960 MHz | 1710 – 2700 MHz |
| Polarization | Vertical | +45°, –45° |
| Gain | Approx. 7 dBi | Approx. 2 x 7 dBi |
| Half-power beam width | Horizontal: Approx. 90° | |
| Impedance | 50 Ω | |
| VSWR | < 2.0 | |
| Isolation, between ports | > 25 dB | |
| Max. power | 50 W (at 50 °C ambient temperature) | |
| Input | 2x Cable RG 223/CU of 1m length, white, with N female connector | |
| Protection class | IP 30 | |
| Weight | 600 g | |
| Packing size | 363 x 152 x 62 mm | |
| Height/width/depth | 232 / 140 / 50 mm | |

- Material:** Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
Mounting plates: Stainless steel.
- Mounting:** Two holes of 6 mm diameter in the mounting plate. Screws are not supplied.
Avoid stressing the cable.
No stress on the hexagonal crimp.
Minimum cable bending radius: 30 mm without tensile load.
- Available accessories:** Broadband power splitters and tappers (790 – 2700 MHz).

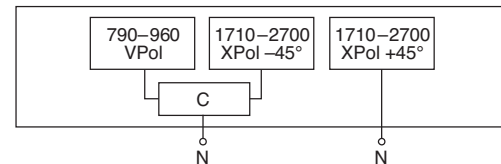


Horizontal Pattern

Mounting:

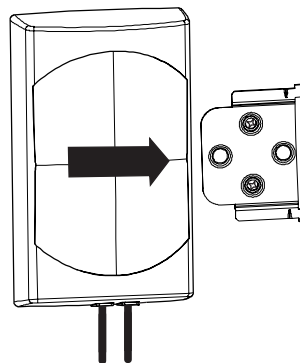

Align the antenna over the attachment plate.

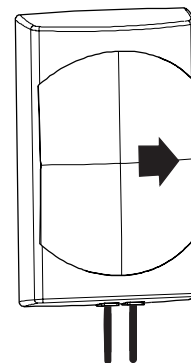

Pull the antenna to the stop.

Mount the attachment plate to the wall using two screws of 4 mm diameter in the position as indicated.

Indoor Multi-band Omni Antenna Vertical Polarization

876–960

1710–2700

V

KATHREIN
Antennen · Electronic



- The antenna needs no additional groundplane.

VPol Indoor 876–960/1710–2700 360° 2dBi

| Type No. | 80010748 |
|-----------------|--|
| Frequency range | 876 – 960 MHz 1710 – 2700 MHz |
| Polarization | Vertical |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| VSWR | 876 – 890 MHz: < 2.0 890 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.6 2170 – 2700 MHz: < 2.0 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | 1 x N female |
| Weight | 300 g |
| Diameter | 210 mm |
| Height | 78 mm (without connector) |



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters and tappers (800 – 2700 MHz).

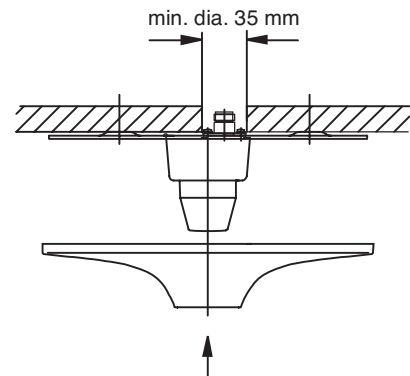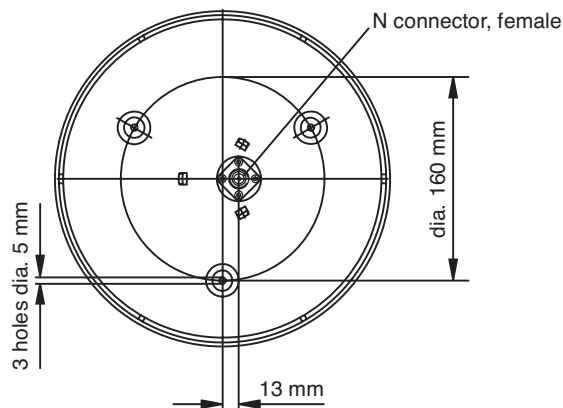

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Multi-band Omni Antenna Vertical Polarization

876–960

1710–2700


V

KATHREIN
Antennen · Electronic



- The antenna needs no additional groundplane.

VPol Indoor 876–960/1710–2700 360° 2dBi

| Type No. | 80010749 |
|-----------------|--|
| Frequency range | 876 – 960 MHz 1710 – 2700 MHz |
| Polarization | Vertical |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| VSWR | 876 – 890 MHz: < 2.0 890 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.6 2170 – 2700 MHz: < 2.0 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | 1 x N female |
| Weight | 340 g |
| Diameter | 215 mm |
| Height | 85 mm (without connector) |

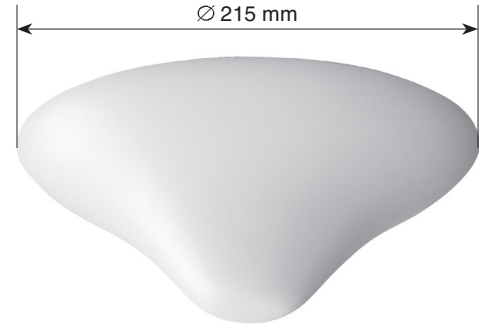

- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters and tappers (800 – 2700 MHz).

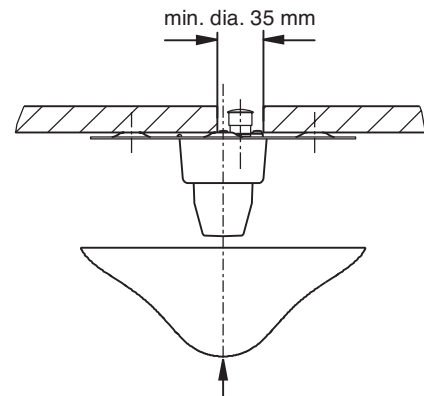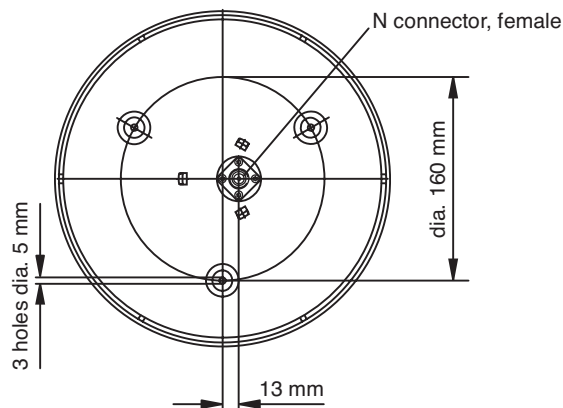

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Multi-band Omni Antenna Vertical Polarization

790–960

1425–3800

5150–6000

KATHREIN

Antennen · Electronic

V



- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 790–960/1425–3800/5150–6000 360° 2dBi

| Type No. | 80010249 |
|------------------|--|
| Frequency range | 790 – 960 MHz 1425 – 3800 MHz 5150 – 6000 MHz |
| Polarization | Vertical |
| Gain | ≈ 2 dBi |
| Impedance | 50 Ω |
| VSWR | 790 – 806 MHz: < 1.7 806 – 960 MHz: < 1.5 1425 – 1710 MHz: < 2.0 1710 – 2200 MHz: < 1.4 2200 – 3800 MHz: < 1.6 5150 – 6000 MHz: < 2.2 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | 1 x N female |
| Protection class | IP 30 |
| Weight | 466 g |
| Packing size | 277 x 277 x 169 mm |
| Diameter | 258 mm |
| Height | 94 mm (without connector) |



- Material:** Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).

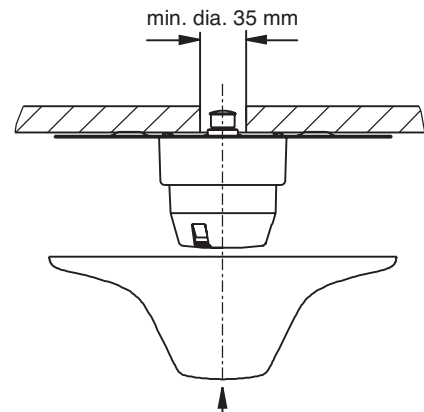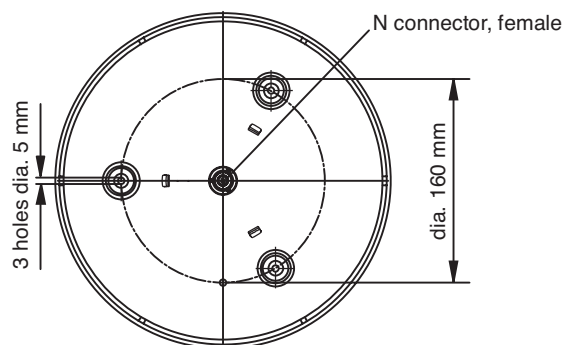

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Omnidirectional Antenna Vertical Polarization

1710–2700

V

KATHREIN
Antennen · Electronic



- The antenna can be operated in the total frequency range simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 1710–2700 360° 2dBi

| Type No. | 741573 |
|-----------------|--|
| Frequency range | 1710 – 2700 MHz |
| Polarization | Vertical |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| VSWR | 1710 – 1880 MHz: < 1.6 1850 – 1990 MHz: < 1.6 1920 – 2170 MHz: < 1.6 2170 – 2500 MHz: < 2.0 2500 – 2700 MHz: < 2.2 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | 1 x N female |
| Weight | 150 g |
| Diameter | 100 mm |
| Height | 50 mm (without connector) |



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Holes in the base enable a mounting on the ceiling. Screws are supplied.
For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).

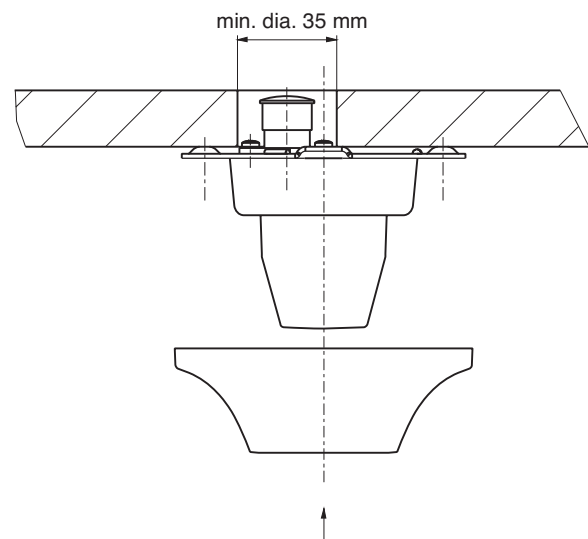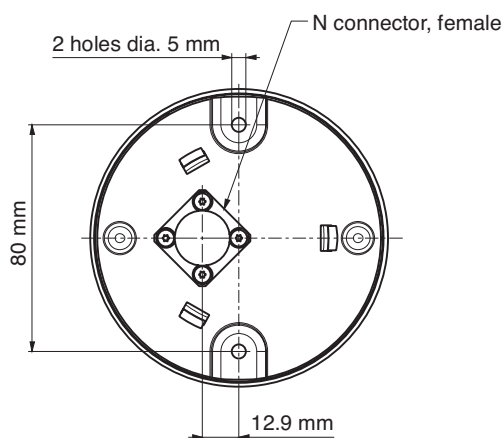

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Omnidirectional Antenna Vertical Polarization

1710–6000

V

KATHREIN
Antennen · Electronic



- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 1710–6000 360° 2dBi

| Type No. | 80010430 |
|------------------|-------------------------------------|
| Frequency range | 1710 – 6000 MHz |
| Polarization | Vertical |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| VSWR | < 1.5 |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Input | 1 x N female |
| Protection class | IP 30 |
| Weight | 133 g |
| Diameter | 138 mm |
| Height | 56 mm (without connector) |



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Holes in the base enable a mounting on the ceiling. Screws are supplied.
For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Available accessories:** Broadband power splitters and tappers (800 – 2500 MHz).

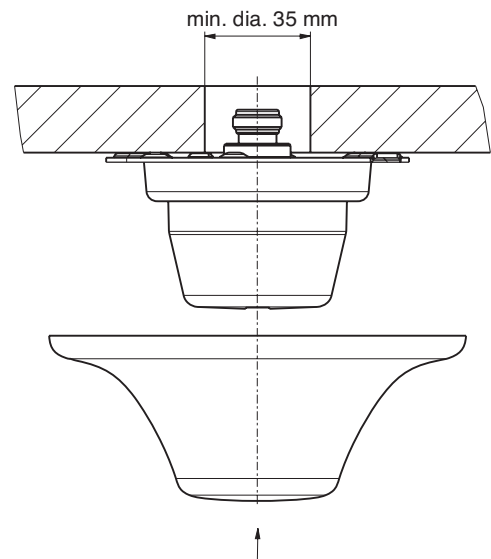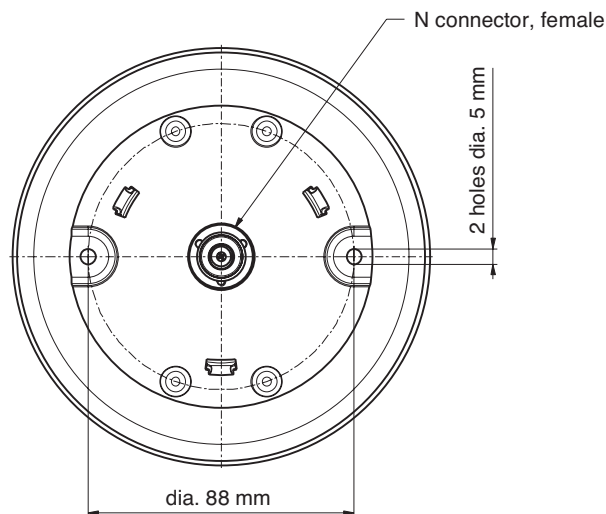

Clip the protective housing into position after the antenna has been mounted with the help of two supplied screws.

Indoor Multi-band Omni Antenna Dual Polarization

| | | |
|---------|-----------|-----------|
| 790–960 | 1710–2700 | 2500–2700 |
| V | | H |

KATHREIN
Antennen · Electronic




- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VHPOI Indoor 790 – 960/1710–2700/2500–2700 360° 2dBi

| | | |
|------------------|--|---------------------------|
| Type No. | 80010709 | |
| Frequency range | 790 – 960 MHz 1710 – 2700 MHz | 2500 – 2700 MHz |
| Polarization | Vertical | Horizontal |
| Gain | ~ 2 dBi | |
| Impedance | 50 Ω | |
| VSWR | 790 – 960 MHz: < 2.0 1710 – 2700 MHz: < 2.0 | 2500 – 2700 MHz: < 2.0 |
| Isolation | > 30 dB | |
| Max. power | 50 W (at 50 °C ambient temperature) | |
| Input | 2 x N female | |
| Protection class | IP 30 | |
| Weight | Approx. 500 g | |
| Packing sizw | 277 x 277 x 169 mm | |
| Diameter | 258 mm | |
| Height | 94 mm (without connector) | |



- Material:** Reflector: Aluminum. Radome: High impact polystyrol, colour: White. Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connectors a hole in the ceiling is required.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (694 – 2700 MHz).

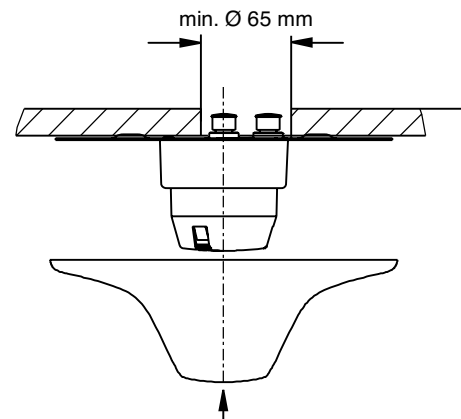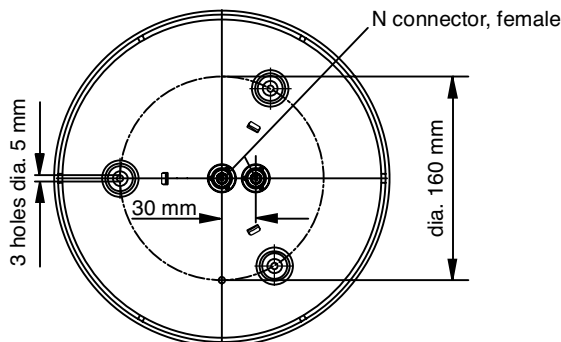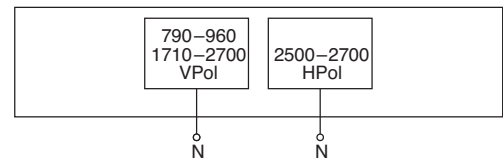

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.



Dual-band Omni Antenna 870–960/1710–1880 Vertical Polarization V Indoor and outdoor use

VPol Omni 870–960/1710–1880 360° 2dBi

| | |
|---------------------|--|
| Type No. | 738449 |
| Input | 1 x N female |
| Connector position | Bottom or top |
| Frequency range | 870 – 960 MHz / 1710 – 1880 MHz |
| VSWR | < 1.7 |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Polarization | Vertical |
| Max. power | 50 W: 870 – 960 MHz 50 W: 1710 – 1880 MHz (at 50 °C ambient temperature) |
| Weight | 250 g |
| Radome diameter | 20 mm |
| Height | 216 mm |

Material: Radiator: Brass.
Radome: Fiberglass, colour: White.

Mounting: One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.

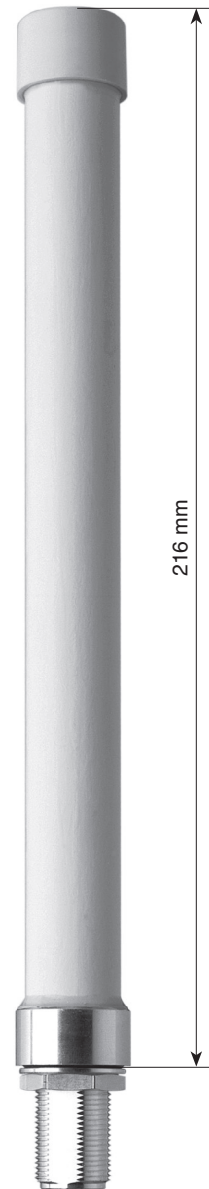

Vertical Pattern

Omnidirectional Antenna Vertical Polarization Indoor and outdoor use

1710–2700

V

KATHREIN
Antennen · Electronic


VPol Omni 1710–2700 360° 2dBi

| Type No. | 80010431 |
|---------------------|-------------------------------------|
| Input | N female |
| Connector position | Bottom or top |
| Frequency range | 1710 – 2700 MHz |
| VSWR | < 1.8 |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) |
| Polarization | Vertical |
| Max. power | 50 W (at 50 °C ambient temperature) |
| Weight | 150 g |
| Radome diameter | 20 mm |
| Height | 115 mm |

Material: Radiator: Brass.
Radome: Fiberglass, colour: White.

Mounting: One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.

Grounding: All metal parts of the antenna and the mounting kit are DC grounded. The inner conductor is not DC grounded.



Vertical Pattern

Dual-band Omni Antenna

824–960/1805–2170

Vertical Polarization



V

Indoor and outdoor use

VPol Omni 824–960/1805–2170 360° 2dBi

| | |
|--------------------|--|
| Type No. | 80010147 |
| Input | 1 x N female |
| Connector position | Bottom or top |
| Frequency range | 824 – 960 MHz / 1805 – 2170 MHz |
| VSWR | < 2.0 |
| Gain | 2 dBi |
| Impedance | 50 Ω |
| Polarization | Vertical |
| Max. power | 50 W: 824 – 960 MHz 50 W: 1805 – 2170 MHz (at 50 °C ambient temperature) |
| Weight | 250 g |
| Radome diameter | 20 mm |
| Height | 216 mm |

- Material:** Radiator: Brass.
Radome: Fiberglass, colour: White.
- Mounting:** One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.

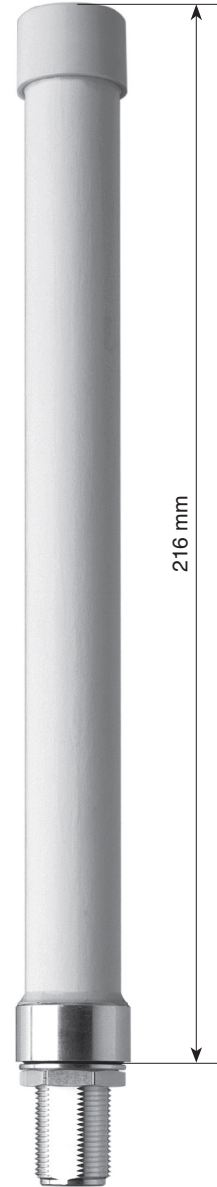

Vertical Pattern

| Type | Type No. | Page |
|---|-------------------------------|------|
| Kathrein's Remote Electrical Tilt System | | |
| General information | | 180 |
| Data sheets of RET components | | |
| Slimline Remote Control Unit (RCU) | 86010147 / 86010148 | 182 |
| Central Control Unit (CCU) for indoor use | 86010006 / 86010026 | 183 |
| Portable Control Adapter (PCA) | 86010046 | 184 |
| Power Supply and Signal Cable | 86010007, ... | 185 |
| DC Power and Signal Splitter | 86010002 | 186 |
| Lightning Protection Device | 86010030 | 187 |
| Earthing Clamp | 86010031 | 188 |
| Smart Bias Tee | 78211053 / ..54 / ..55 / ..56 | 318 |
| | 78211063 / ..64 / ..65 / ..66 | 318 |

The answer to all current and future network demands

Network planning is becoming ever more complicated, especially with the advent of 3G and/or 4G (LTE).

The challenge for wireless network operators is to balance coverage, capacity, call quality and costs in order to gain maximum revenue from their network. Each of the above factors affects the others and so network engineers use many different techniques



for establishing the right balance they are trying to achieve.

One of these methods is adjusting the antenna's downtilt. Here, the engineer must take into consideration certain facts, such as the weather, access to the cell site, availability of specialized installation teams and special equipment etc. Moreover, such an antenna adjustment can typically take several hours to perform.


Since the cell site is usually switched off for safety reasons during such an adjustment, this results in lost calls and therefore revenue whilst these changes are being made. Consequently, operators tend to make fewer adjustments and so networks are often left operating unoptimized, which also eventually results in lost revenue for the operators.



However, with Kathrein's Remote Electrical Tilt unit engineers can make the necessary adjustments without shutting down the whole system!

Further advantages of using Kathrein's Remote Electrical Tilt (RET) system:

- No need for specialized teams trained in altitude work or with special safety skills
- Limited site access and/or time restrictions are not so important
- No special platforms or other means of access to the antenna are required
- Adjustments can be made and the relevant measurements performed speedily
- Network alterations can be carried out irrespective of weather conditions
- No reduction in coverage – cells remain fully operational whilst changes are being made
- Operators estimate that approx. 20% of UMTS equipment can be saved by using such a RET system.

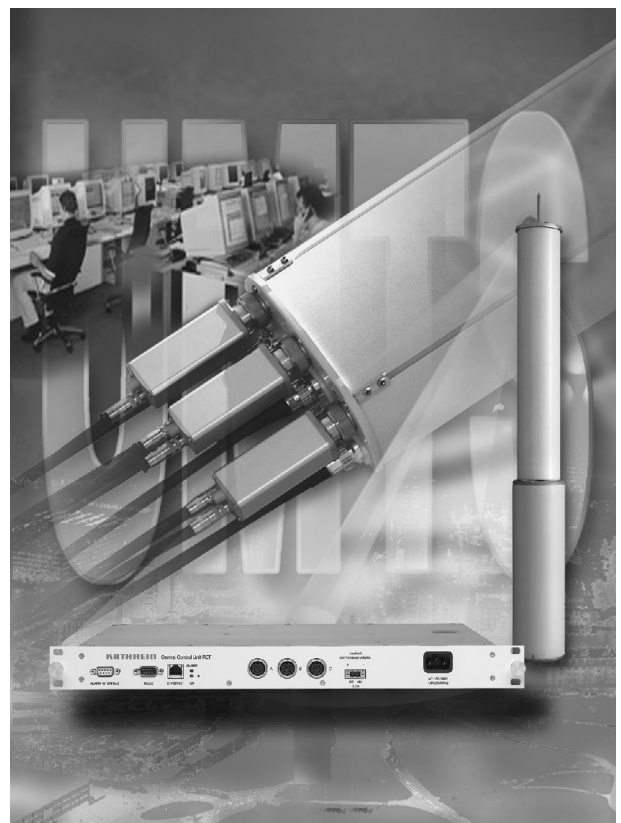


RET components



Kathrein's overall RET system works in accordance with the AISG (Antenna Interface Standards Group) standard and 3 GPP (3rd Generation Partnership Project).

For details of RET system please see Kathrein RET system brochure

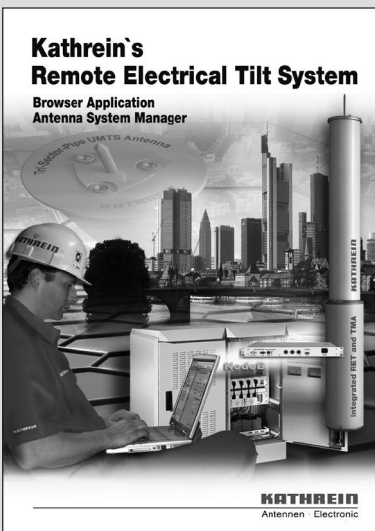

Slimline RCU
(Remote Control Unit)



CCU (Central Control Unit)



PCA
(Portable Control Adapter)



DC Power and Signal Splitter



Optional:

Smart Bias Tee



Control Cable



DTMA (Double Tower Mounted Amplifier)



Lightning Protection Device



Smart Plex®



Earthing Clamp



RET

Remote Control Unit (RCU) for Kathrein base station antennas with adjustable electrical down-tilt and appropriate mechanical interface.

- Compliant to AISG 1.1 and 3GPP/AISG 2.0
- Compact size
- Daisy Chain feasibility
- Suitable for operation under outdoor condition



| Type No. | 86010147 | 86010148 |
|--|--|---------------|
| Protocols | compliant to AISG 1.1 and 3GPP/AISG 2.0 | |
| Logical interface ex factory ¹⁾ | AISG 1.1 | 3GPP/AISG 2.0 |
| Input voltage range | 10 ... 30 V (pin 1, pin 6) | |
| Power consumption | < 1 W (stand by); < 10 W (motor activated) | |
| Connectors ²⁾ | 2 x 8 pin connector according to IEC 60130-9; according to AISG Daisy chain in: male; Daisy chain out: female | |
| Hardware interfaces | RS 485A/B (pin 5, pin 3); power supply (pin 1, pin 6); DC return (pin 7); according to AISG / 3GPP | |
| Adjustment time (full range) | 40 sec (typically, depending on antenna type) | |
| Adjustment cycles | > 50,000 | |
| Temperature range | -40 °C ... +60 °C | |
| Protection class | IP 24 | |
| Lightning protection | AISG interface (each pin) 2.5 kA (10/350 μs) 8 kA (8/20 μs) | |
| Housing material | Profile: Aluminum anodized; cover: Aluminum die cast coated | |
| Weight | 455 g (0.99 lbs) | |
| Packing size | 245 x 93 x 102 mm, (9.6 x 3.6 x 4 inches) | |
| Dimensions (H x W x D) | 177.5 x 59.5 x 49.5 mm, (7.0 x 2.3 x 1.9 inches) | |



¹⁾ The protocol of the logical interface can be switched from AISG 1.1 to 3GPP/AISG 2.0 and vice versa with a vendor specific command. Start-up operation of the RCU 86010147 is only possible in a RET system supporting AISG 1.1 and start-up operation of the RCU 86010148 is only possible in a RET system supporting 3GPP/AISG 2.0!

The protocol can also be changed as follows: *AISG 1.1 to 3 GPP*: Enter "3GPP" into the additional data field "Installer's ID" and perform a layer 7 reset or a power reset. *3GPP to AISG 1.1*: Enter "AISG1" into the additional data field "Installer's ID" and perform a layer 2 reset or a power reset. After switching the protocol any other information can be entered into the "Installer's ID" field.

Please note:

If the Primary of the RET system doesn't support the standard of the 'logical interface ex factory', the RCU must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.


²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

- Standards:
- EN 60950-1 (Safety)
 - EN 60950-22 (Safety – Equipment installed outdoor)
 - EN 55022 (Emission)
 - EN 55024 (Immunity)
 - ETS 300019-1-4 (Environmental)
 - UL 60950-1; 1st edition


Certification: CE, FCC

Scope of supply: Remote Control Unit
Assembly paste

Daisy chain in (male) Daisy chain out (female)



Bottom view of RCU

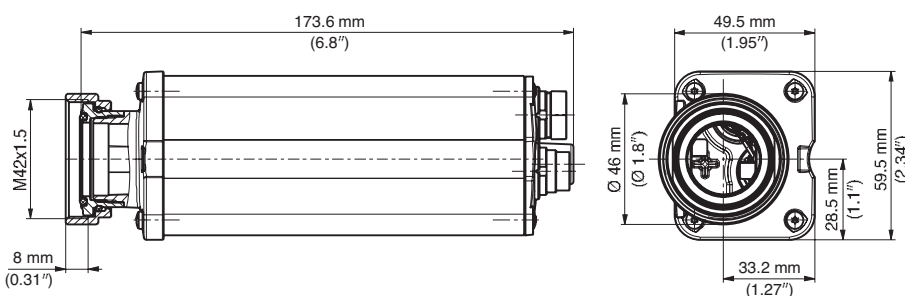

Central Control Unit (CCU) For Remote Electrical Tilt (RET) and Tower Mounted Amplifier (TMA) Control

For indoor use



Central Control Unit

| Type No. | 86010006 | 86010026 |
|-----------------------------------|---|------------------------|
| Connectors ¹⁾ to RCU | 3 x 8 pin connector acc. to IEC 60130-9, female, acc. to AISG | |
| Power supply from BTS | DC: -48 V / max. 1.7 A AC: 100 ... 240 V / 50 ... 60 Hz / max. 1.6 A | DC: -48 V / max. 1.7 A |
| Power supply to RCU | 3 x +29 V DC / max. 1.7 A (in total) 3 x +13 V DC / max. 3.8 A (in total) | |
| Total output power | Max. 50 W | |
| Interface to RCU and TMA | RS 485 / power supply | |
| Protocol to RCU and TMA | HDLC hex-coded command set, acc. to AISG | |
| Interface to BTS | Ethernet (10 Base-T) and RS 232 | |
| Protocols to BTS | TCP/IP, PPP, HTTP/HTML, UDP, DHCP, FTP, SNMP, ICMP/PING | |
| Alarm interface to BTS | 8 x open collector output, user programmable | |
| Max. number of RCU's and/or TMA's | Up to 27 RCU's in daisy chain and up to 6 DTMA's; depending on cable configuration and max. power | |
| Max. length of control cable | 200 m (9 RCU's in daisy chain configuration) | |
| Temperature range | -25 °C ... +55 °C ambient temperature | |
| Packing size | 597 mm x 367 mm x 148 mm | |
| Dimensions (h / w / d) | 19" 1 HU* (43.6 mm / 483 mm / 250 mm) | |


* HU = Height Unit

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand tightened').
The connector should be tightened by hand only.


- Standards: EN 60950-1
EN 55022
EN 55024
UL 60950-1, 1st edition
- Certifications: CE, FCC part 15 class B; UL
- Scope of supply: CCU
RET Manual
DC Cable
AC Power Cords for USA, UK and Germany
Ethernet cable, crossed



CCU Interfaces

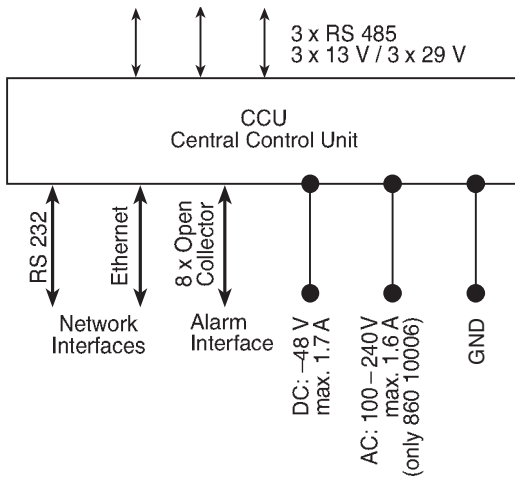

Examples of CCU – RCU connections

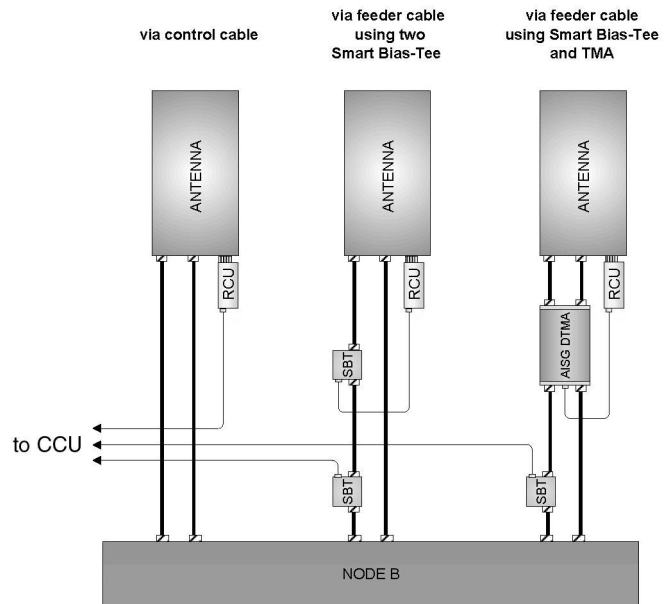

Portable Control Adapter (PCA) For Remote Control Unit (RCU) For Tower Mounted Amplifier (TMA)



Portable Control Adapter

| | |
|--|--|
| Type No. | 86010046 |
| Connector * to RCU/TMA | 1 x 8-pin connector according to IEC 60130-9, female, conforming to AISG RF-connector (SMB male) |
| Input voltage of PCA | 24 V DC |
| Output voltage to RCU's/TMA's | AISG female pin 6 (24 V DC): 24 V DC \pm 10% AISG female pin 1 (12 V DC): 14 V DC \pm 7% RF male (at 24 V DC): 24 V DC \pm 10% *** RF male (at 12 V DC): 14 V DC \pm 7% *** |
| Output power (power supply to RCU's/TMA's) | AISG female pin 6 (24 V DC) without load on pin 1 (12 V DC) and on RF-plug: \leq 60 W AISG female Pin 1 (12 V DC) with max. 30 W load on pin 6 (24 V DC) and/or on RF plug: \leq 30 W |
| Current monitoring measurement level | Per branch (12 V, 24 V, RF): 10 – 2500 mA |
| Over-current protection | Per branch (12 V, 24 V, RF): $<$ 2500 mA |
| Interface to RCU/TMA | RS 485 / power supply / RF connector (SMB male) |
| Protocol to RCU/TMA | HDLC hex-coded command set, conforming to AISG 1.1 and 3GPP / AISG 2.0 |
| Interface to PC | USB 1.1/2.0 |
| Max. number of RCU's/TMA's | 27/3 pcs., depending on system configuration and length of control cable |
| Max. length of control cable | 200 m / 9 RCU's (in daisy chain configuration) 150 m / 6 RCU's (in splitter configuration) |
| Weight | 535 g (incl. external power adapter) |
| Temperature range | 0 ... +55 °C ambient temperature |
| Height x width x depth | 40 mm x 95 mm x 160 mm |
| External power supply ** | Input: 90 – 264 V AC, 47 – 63 Hz 24 V DC / 3.0 A |


- * Tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!
- ** If powered via AISG-interface, no external power supply is required.
- *** Switchable with software

Certificate: CE
FCC part 15 class B
UL (for external power adapter)

Standards: EN 60950-1
EN 55022
EN 55024

System requirements for PCA Software: Windows 2000; Windows XP, Vista, Win7 (32 bit version)

Scope of supply: PCA
External power supply (24 V DC / 70 W)
USB cable
AC power cable
CD-ROM with PCA software, drivers and manual
Installation guide

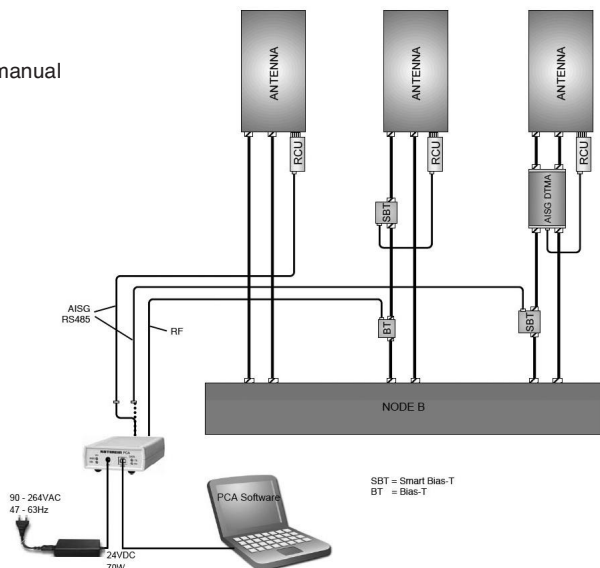

Connecting Cable For Remote Electrical Tilt (RET) System

For indoor and outdoor use



RET Cable for power supply and control

| | |
|---|---|
| Type No. | 86010007 ... |
| Connectors | 2 x 8 pin connector according IEC 60130-9, female/male |
| Tightening torque for fixing the connectors | 0.5 – 1 Nm (The connector should be tightened by hand only) |
| Construction | Screen 1x twisted pair 100 Ω/1 MHz 2x power supply, 1x ground AWM style 20317 I/II A/B + 20549 + 20233 |
| Rated current | 4 A (power supply) (at 50 °C air temperature) |
| Temperature range | –40 °C to +80 °C, (fixed position) |
| Protection class | IP 67 (connected) |
| Cable diameter | 8 mm |
| Flammability | VL 1581 VW-1 CSA FT 1 |
| Colour | Black, similar to RAL 9005 |


Minimum bending radius: One time 60 mm, several times 120 mm.

The male and female connectors of all Kathrein RET products are compatible components which are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E.



Control Cable

| Length | Type No. |
|--------|----------|
| 0.5 m | 86010054 |
| 1 m | 86010007 |
| 2 m | 86010008 |
| 3 m | 86010029 |
| 5 m | 86010009 |
| 10 m | 86010010 |
| 20 m | 86010032 |
| 25 m | 86010011 |
| 40 m | 86010012 |
| 50 m | 86010033 |
| 60 m | 86010013 |
| 80 m | 86010014 |
| 100 m | 86010015 |

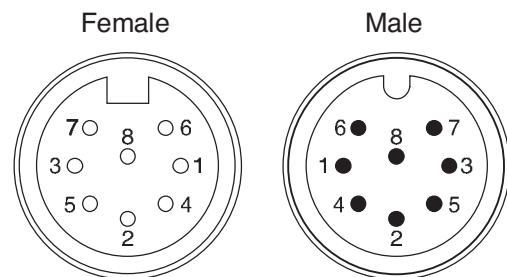

PIN assignment according AISG:

- 1 +13 V DC (+12 V DC nominal)
- 2 not connected
- 3 RS485 B
- 4 not connected
- 5 RS485 A
- 6 +29 V DC (+24 V DC nominal)
- 7 DC Return
- 8 not connected

DC-Power and Signal Splitter For Remote Electrical Tilt (RET) Indoor and Outdoor Use

AISG compliant device for splitting of DC-power and control signals from one input to three outputs.




3-way Splitter for RET

| | |
|------------------------------|---|
| Type No. | 86010002 |
| Connectors ¹⁾ | 4 x 8 pin connector according IEC 60130-9, 1 x male, 3 x female |
| Rated current (power supply) | 3 A (at 50 °C) |
| Max. voltage | 60 V |
| Protection class | IP 65 |
| Weight | 250 g |
| Packing size | 114 mm x 117 mm x 117 mm |
| Height/width/depth | 91 mm / 103 mm / 72 mm |

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

- Material:** Connector plate: Aluminum.
Cap: Plastic.
- Mounting:** Mast mounting (50 – 145 mm diameter) by clamp.
Wall mounting by screws (not supplied).
- Note:** **Connectors must be situated at the bottom. No inverted mounting possible.**
- Scope of supply:** 3-way Splitter
Clamp (Art.-No. 1311847)

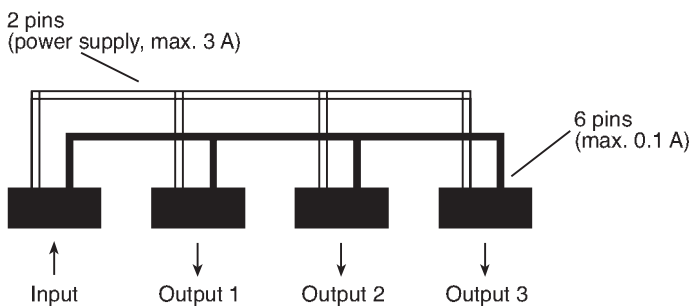

Clamp, Art. No. 1311847

Lightning Protection Device (LPD) For Remote Electrical Tilt (RET) Indoor and Outdoor Use

The device is designed for lightning protection of control cables carrying partial lightning currents up to 25 kA (shield) and 2.5 kA (inner conductor), according IEC 61643-1, IEC 61312-3. Each pin is protected individually.



Lightning Protection Device for RET

| | |
|---|--|
| Type No. | 86010030 |
| Connectors ¹⁾ | 2 x 8 pin connector according IEC 60130-9, input: male, output: female |
| SPD-Type | 8 x bipolar gas tube |
| Max. impuls current | 25 kA (housing, shield) (10/350 μ s) inner conductors: 2.5 kA/pin (10/350 μ s) |
| Max. dynamic overvoltage at spark gap (1 kV/ μ s) | < 700 V |
| Static overvoltage (100 V/s) | < 100 V |
| Grounding | Via mounting plate / clamps at metallic surfaces or via separate cable, min. cross-section 5 mm ² Cu (screw M6) |
| Max. operation current | 4 A at 50 °C |
| Max. operation voltage | 60 V |
| Weight | 250 g |
| Packing size | 114 mm x 117 mm x 117 mm |
| Height/width/depth | 91 mm / 103 mm / 72 mm |

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

Material: Connector plate: Aluminum.
Cap: Plastic.

Mounting: Mast mounting (50 – 145 mm diameter) by clamp.
Wall mounting by screws (not supplied).


Note: No decoupling elements are integrated. The coordination with additional LPD's (device input) should be checked according to IEC 61312.

Grounding of the device via the mounting plate at metallic surfaces or via additional grounding cable (not included in the delivery extend).

Connectors must be situated at the bottom. No inverted mounting possible.

Important: A control cable with a minimum length of 2 meters is required between Lightning Protection Device and Central Control Unit at the BTS to achieve the required decoupling.

Scope of supply: Lightning Protection Device
Clamp (50 ... 145 mm)

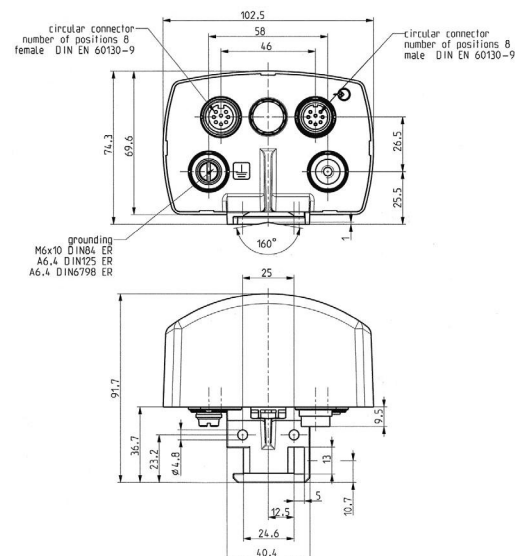

Earthing Clamp For Power Supply and Control Cable For Remote Control Unit (RCU)

The clamp is designed for lightning protection of control cables according to EN 50164-1


Earthing clamp for RCU power supply and signal cable

| | |
|------------------------|---|
| Type No. | 86010031 |
| Max. lightning current | 20 kA (pulse 10/350 μ sec) |
| Contact resistance | < 3 m Ω |
| Protection class | IP 68 |
| Grounding | Via stranded grounding wire, 16 mm ² , length 0.5 m, one end terminated with cable eye (10 mm lug) |
| Packing size | Plastic bag: 210 mm x 210 mm |
| Weight | 160 g |

Material:
Body: Stainless steel with vulcanized Ethylene-Propylene-Caoutchouc
Screw: Stainless steel
Skin: Copper alloy
Grounding wire: Copper


Note:
The earthing clamp is suitable only for the Kathrein Power Supply and Signal Cables,
Type No. 860 10007 to 860 10015, 860 10029, 860 10032, 860 10033, 860 10054 to 860 10060 or shielded cables with
– shield diameter 6.1 mm
– jacket diameter 7.8 mm \pm 0.3 mm

The kit contains:
1 x Grounding kit body incl. Butyl sealing rope covered with paper
1 x Screw M6 DIN 912
1 x Grounding wire

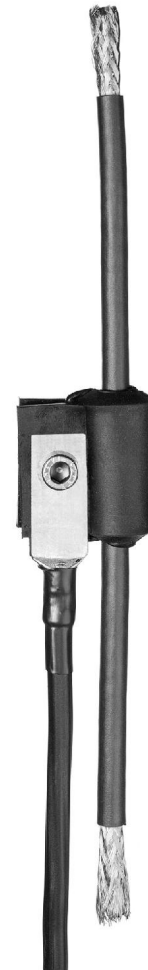

Mounting instructions:


This instruction is written for qualified and experienced personnel. Please read it carefully before starting work. Any liability or responsibility for the result of improper or unsafe installation is disclaimed!

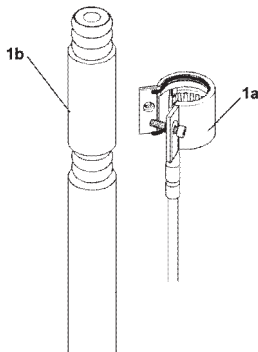


Attention!
Install grounding kit only where the cable runs straight.

Fig. 1a Preassembled grounding kit.

Fig. 1b Clean the plastic jacket at the desired grounding point and cut out a strip of 15 mm with aid of a suitable stripping tool.



Remove covering paper from Butyl sealing. Wrap the grounding kit body around the cable and align it.



Tighten the screw (> 6 Nm)

Splitters

| Type | Type No. | Frequency range | Remark | Max. power | Connector female | Page |
|-------------------------|----------|-----------------|----------------|------------|------------------|------|
| 2-way Splitter 380–3800 | 86010130 | 380 – 3800 MHz | Indoor/Outdoor | 200 W | N | 190 |
| 2-way Splitter 380–3800 | 86010131 | 380 – 3800 MHz | Indoor/Outdoor | 700 W | 7-16 | 190 |
| 2-way Splitter 694–2700 | 86010017 | 694 – 2700 MHz | Indoor | 100 W | N | 191 |
| 3-way Splitter 694–2700 | 86010018 | 694 – 2700 MHz | Indoor | 100 W | N | 191 |
| 4-way Splitter 694–2700 | 86010019 | 694 – 2700 MHz | Indoor | 100 W | N | 191 |
| 2-way Splitter 694–3800 | 86010100 | 694 – 3800 MHz | Indoor/Outdoor | 200 W | N | 192 |
| 2-way Splitter 694–3800 | 86010101 | 694 – 3800 MHz | Indoor/Outdoor | 700 W | 7-16 | 192 |
| 3-way Splitter 694–3800 | 86010102 | 694 – 3800 MHz | Indoor/Outdoor | 200 W | N | 192 |
| 3-way Splitter 694–3800 | 86010103 | 694 – 3800 MHz | Indoor/Outdoor | 700 W | 7-16 | 192 |
| 4-way Splitter 694–3800 | 86010104 | 694 – 3800 MHz | Indoor/Outdoor | 200 W | N | 192 |
| 4-way Splitter 694–3800 | 86010105 | 694 – 3800 MHz | Indoor/Outdoor | 700 W | 7-16 | 192 |

Tappers

| | | | | | | |
|-----------------------------------|----------|----------------|----------------|-------|------|-----|
| 2-way Tapper 694–2700 7.0/1.0 dB | 86010136 | 694 – 2700 MHz | Indoor | 100 W | N | 193 |
| 2-way Tapper 694–2700 10.4/0.4 dB | 86010137 | 694 – 2700 MHz | Indoor | 100 W | N | 193 |
| 2-way Tapper 694–2700 15.1/0.1 dB | 86010138 | 694 – 2700 MHz | Indoor | 100 W | N | 193 |
| 2-way Tapper 694–2700 7.0/1.0 dB | 86010150 | 694 – 2700 MHz | Indoor/Outdoor | 500 W | 7-16 | 194 |
| 2-way Tapper 694–2700 10.4/0.4 dB | 86010151 | 694 – 2700 MHz | Indoor/Outdoor | 500 W | 7-16 | 194 |
| 2-way Tapper 694–2700 15.1/0.1 dB | 86010152 | 694 – 2700 MHz | Indoor/Outdoor | 500 W | 7-16 | 194 |

Continuously adjustable ratio

| | | | | | | |
|--|-----------|----------------------------------|--------|-------|---|-----|
| 2-way Tapper 790–960/1710–2170 5.0–15.0dB | K63236001 | 790 – 960 MHz 1710 – 2170 MHz | Indoor | 100 W | N | 195 |
| 2-way Tapper 870–960/1710–2500 5.0–15.0dB | 86010023 | 870 – 960 MHz 1710 – 2500 MHz | Indoor | 100 W | N | 195 |

Antenna Measurement Tools (from Schomandl)

| | |
|--------------------------|-----|
| SWR Instrument FAT 2710N | 196 |
| WLAN Power Meter (VSWR) | 197 |

Power Meter

| | |
|------------------------------------|-----|
| WLAN Power Meter (Power) | 197 |
| Broadcast RF Power Monitor | 198 |
| Safe One Resonal RF Safety Monitor | 199 |

Low-loss Power Splitters Multi-band

380–3800

KATHREIN
Antennen · Electronic

For indoor and outdoor use.

2-way Splitter 380–3800


| Type No. | 86010130 | 86010131 |
|--|---------------------------------|----------|
| Connector (female) | N | 7-16 |
| Max. power (at 50 °C ambient temperature) | 200 W | 700 W |
| For connecting ... antennas | 2 | |
| Frequency range | 380 – 3800 MHz | |
| VSWR | < 1.5 | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | |
| Impedance | 50 Ω | |
| Insertion loss | < 0.05 dB | |
| Weight | 750 g | 870 g |
| Packing size | 300 x 75 x 75 mm | |

- Material:** Brass. Surface treatment: CuSnZn3
- Mounting:** Bracket for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).
- DC capability:** DC transmission between all terminations (suitable for remote power supply systems).
- Environmental conditions:** ETS 300 019-1-4 class 4.1 E
– Low temperature: -55 °C
– High temperature (dry): +60 °C
IP 65



86010131

86010130

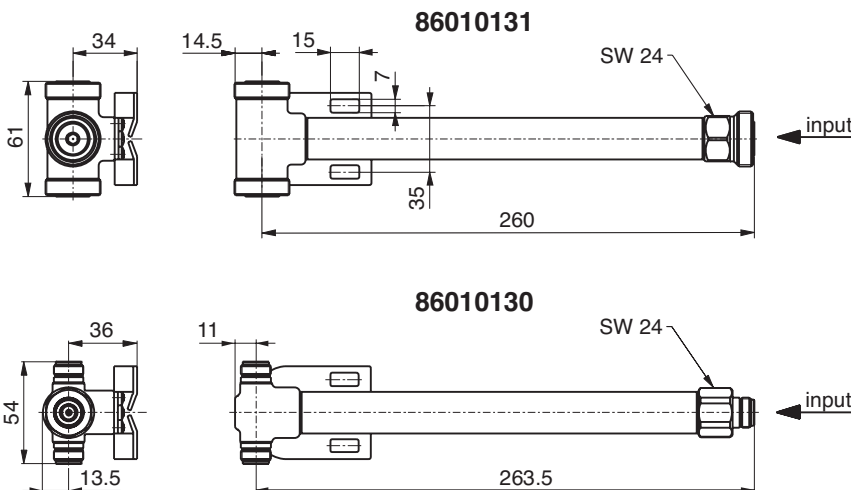

Clamps (order separately)

| Type | Description | Remarks |
|--------|-------------|-----------------------------|
| 736801 | 1 clamp | Mast: 34 – 60 mm diameter |
| 736802 | 1 clamp | Mast: 60 – 80 mm diameter |
| 736803 | 1 clamp | Mast: 80 – 100 mm diameter |
| 736804 | 1 clamp | Mast: 100 – 120 mm diameter |
| 736805 | 1 clamp | Mast: 120 – 140 mm diameter |



736805

Low-loss Power Splitters Multi-band

694–2700

KATHREIN
Antennen · Electronic

For indoor use.

2-way Splitter 694–2700

3-way Splitter 694–2700

4-way Splitter 694–2700


| Type No. | 86010017 | 86010018 | 86010019 |
|-----------------------------|---|----------------------------|-------------------------|
| Frequency range | 694 – 2700 MHz | | |
| For connecting ... antennas | 2 | 3 | 4 |
| Insertion loss | < 0.05 dB | | |
| Impedance | 50 Ω | | |
| VSWR | 694 – 894 MHz: 790 – 2500 MHz: 2500 – 2700 MHz: | < 1.52 < 1.25 < 2.02 | < 1.5 < 1.3 < 2.0 |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power | 100 W (at 50 °C ambient temperature) | | |
| Connector | N female | | |
| Weight | approx. 0.6 kg | | |
| Profile cross-section | 25 x 25 mm | | |
| Packing size | 242 x 110 x 95 mm | | |
| Max. size | 204 / 63 / 41 mm | | |

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission between all terminations
(suitable for remote power supply systems).

Environmental conditions: IP 52



Input 
86010019

Low-loss Power Splitters Multi-band

694–3800

KATHREIN
Antennen · Electronic

For indoor and outdoor use.



2-way Splitter 694–3800

3-way Splitter 694–3800

4-way Splitter 694–3800


| Type No. | 86010100 | 86010101 | 86010102 | 86010103 | 86010104 | 86010105 |
|--|---|----------|----------|----------|----------|----------|
| Connector (female) | N | 7-16 | N | 7-16 | N | 7-16 |
| Max. power (at 50 °C ambient temperature) | 200 W | 700 W | 200 W | 700 W | 200 W | 700 W |
| For connecting ... antennas | 2 | | 3 | | 4 | |
| Frequency range | 694 – 3800 MHz | | | | | |
| VSWR | 694 – 894 MHz: < 1.32 790 – 3800 MHz: < 1.15 | | | | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | | | | |
| Impedance | 50 Ω | | | | | |
| Insertion loss | < 0.05 dB | | | | | |
| Weight | 750 g | 870 g | 760 g | 900 g | 775 g | 960 g |
| Packing size | 300 x 75 x 75 mm | | | | | |

- Material: Brass. Surface treatment: CuSnZn3
- Mounting: Bracket for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).
- DC capability: DC transmission between all terminations (suitable for remote power supply systems).
- Environmental conditions: ETS 300 019-1-4 class 4.1 E
– Low temperature: -55 °C
– High temperature (dry): +60 °C
IP 65

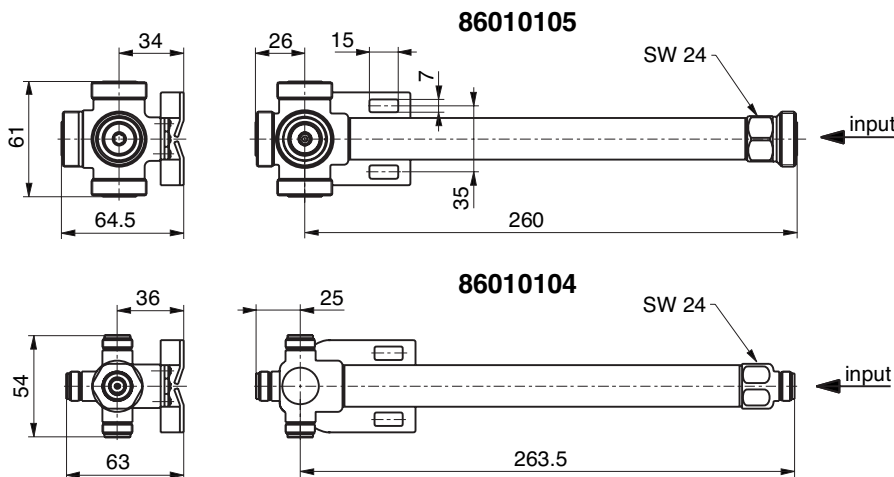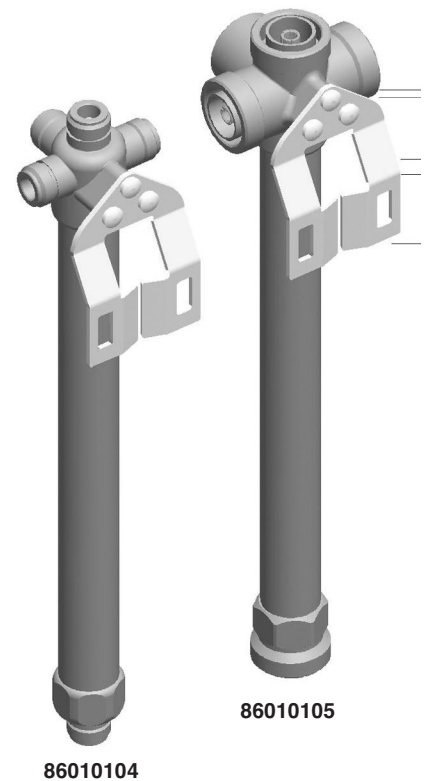

Clamps (order separately)

| Type | Description | Remarks |
|--------|-------------|-----------------------------|
| 736801 | 1 clamp | Mast: 34 – 60 mm diameter |
| 736802 | 1 clamp | Mast: 60 – 80 mm diameter |
| 736803 | 1 clamp | Mast: 80 – 100 mm diameter |
| 736804 | 1 clamp | Mast: 100 – 120 mm diameter |
| 736805 | 1 clamp | Mast: 120 – 140 mm diameter |

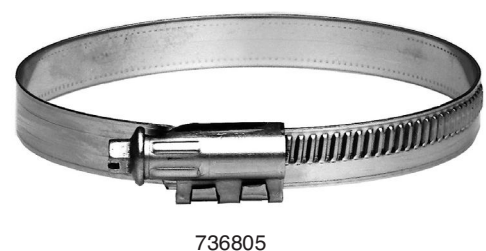

For indoor use.

2-way Tapper 694–2700 7.0 /1.0dB

2-way Tapper 694–2700 10.4/0.4dB

2-way Tapper 694–2700 15.1/0.1dB

| Type No. | 86010136 | 86010137 | 86010138 |
|-----------------------------|---|-----------|-----------|
| Frequency range | 694 – 2700 MHz | | |
| Tap Loss | – 1.0 dB | – 0.4 dB | – 0.1 dB |
| Input ↔ P ₁ | – 7.0 dB | – 10.4 dB | – 15.1 dB |
| Input ↔ P ₂ | | | |
| For connecting ... antennas | 2 | | |
| Insertion loss | < 0.05 dB | | |
| Impedance | 50 Ω | | |
| VSWR | 694 – 790 MHz: < 2.0 790 – 2500 MHz: < 1.5 2500 – 2700 MHz: < 2.0 | | |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | | |
| Max. power | 100 W (at 50 °C ambient temperature) | | |
| Connector | N female | | |
| Weight | 500 g | | |
| Profile cross-section | 25 x 25 mm | | |
| Packing size | 267 x 95 x 111 mm | | |
| Max. size | 244 / 64 / 25 mm | | |

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission only between input and port P₁.
P₂ is coupled capacitively.

Environmental conditions: IP 52



Input
86010138



For indoor and outdoor use.

2-way Tapper 694–2700 7.0 / 1.0dB
2-way Tapper 694–2700 10.5/0.5dB
2-way Tapper 694–2700 15.3/0.3dB


| Type No. | 86010150 | 86010151 | 86010152 |
|-----------------------------|--------------------------------------|----------|----------|
| Frequency range | 694 – 2700 MHz | | |
| Tap Loss | | | |
| Input ↔ P ₁ | -1.0 dB | -0.5 dB | -0.3 dB |
| Input ↔ P ₂ | -7.0 dB | -10.5 dB | -15.3 dB |
| For connecting ... antennas | 2 | | |
| Insertion loss | < 0.05 dB | | |
| Impedance | 50 Ω | | |
| VSWR | 694 – 2700 MHz: < 1.5 | | |
| Intermodulation IM3 | < -150 dBc (2 x 43 dBm carrier) | | |
| Max. power per input | 500 W (at 50 °C ambient temperature) | | |
| Connector | 7-16 female | | |
| Weight | Approx. 1.3 kg | | |
| Packing size | 310 x 93 x 112 mm | | |
| Max. size | 244 / 90 / 55 mm | | |

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission only between input and port P₁.
P₂ is coupled capacitively.

Mounting: Bracked for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).

Environmental conditions: IP 65

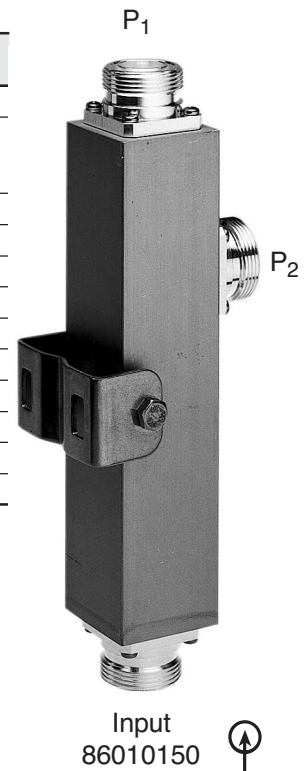

Clamps (order separately)

| Type No. | Description | Remarks |
|----------|----------------|-----------------------------|
| 734360 | 1 tension band | Mast: 34 – 60 mm diameter |
| 734361 | 1 tension band | Mast: 60 – 80 mm diameter |
| 734362 | 1 tension band | Mast: 80 – 100 mm diameter |
| 734363 | 1 tension band | Mast: 100 – 120 mm diameter |
| 734364 | 1 tension band | Mast: 120 – 140 mm diameter |
| 734365 | 1 tension band | Mast: 45 – 125 mm diameter |



Low-loss Power Tappers

790–960 / 1710–2170

Multi-band

870–960 / 1710–2500

Continuously Adjustable

5.0 – 15.0 dB

KATHREIN
Antennen · Electronic

For indoor use.

K63236001: 2-way Tapper 790–960/1710–2170 5.0–15.0dB


86010023: 2-way Tapper 870–960/1710–2500 5.0–15.0dB

| Type No. | K63236001 | 86010023 |
|---|--|--------------------------------------|
| Frequency range | 790 – 960 MHz and 1710 – 2170 MHz | 870 – 960 MHz and 1710 – 2500 MHz |
| Power ratio between outputs (P ₂ ↔ P ₁) | –5.0 dB to –15.0 dB continuously adjustable | |
| For connecting ... antennas | 2 | |
| Insertion loss | < 0.1 dB | |
| Impedance | 50 Ω | |
| VSWR | 790 – 824 MHz: < 2.1 824 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.7 | < 1.7 |
| Intermodulation IM3 | < –150 dBc (2 x 43 dBm carrier) | |
| Max. power | 100 W (at 50 °C ambient temperature) | |
| Connector | N female | |
| Weight | 0.5 kg | |
| Profile cross-section | 25 x 25 mm | |
| Packing size | 249 x 111 x 40 mm | 277 x 111 x 40 mm |
| Max. size | 235 / 100 / 25 mm | 263 / 100 / 25 mm |

Material: Housing: Aluminum.
Inner conductor: Brass.
Adjustment mechanism: ASA.

DC capability: DC transmission only between input and port P₁.
P₂ is coupled capacitively.

Environmental conditions: IP 52

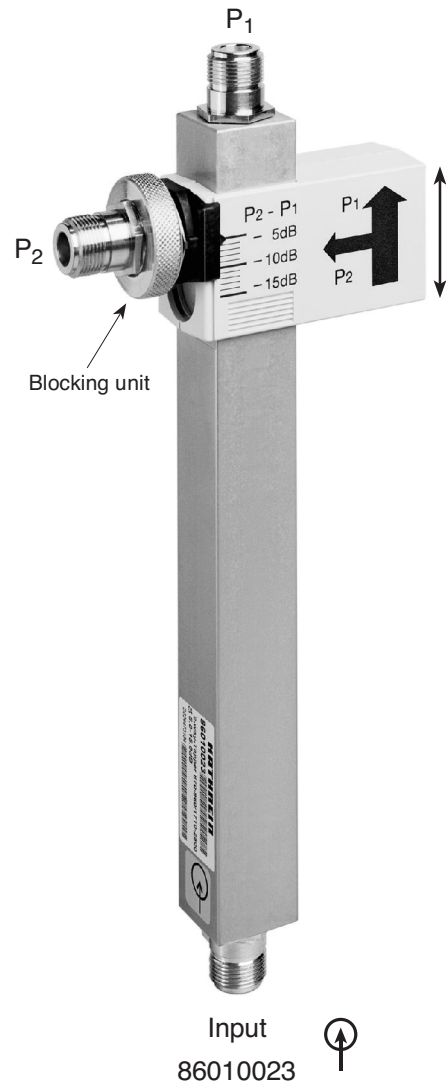

Splitting table

| P ₂ / P ₁ [dB] | Splitting ratio P ₁ / P ₂ | Splitting attenuation | |
|--------------------------------------|--|--|--|
| | | P _{Input} / P ₁ [dB] | P _{Input} / P ₂ [dB] |
| -5 | 3.2 | -1.2 | -6.2 |
| -6 | 4 | -1.0 | -7.0 |
| -7 | 5 | -0.8 | -7.8 |
| -8 | 6.3 | -0.6 | -8.6 |
| -9 | 8 | -0.5 | -9.5 |
| -10 | 10 | -0.4 | -10.4 |
| -11 | 12.6 | -0.3 | -11.3 |
| -12 | 15.8 | -0.3 | -12.3 |
| -13 | 20 | -0.2 | -13.2 |
| -14 | 25.1 | -0.2 | -14.2 |
| -15 | 31.6 | -0.1 | -15.1 |

- LCD Display works in direct sunlight and with backlight in dark areas.
- Built-in synthesized RF sweeping source.
- Measured results can be stored for further analysing and documentation on internal and external storage media
- Time stamp and operator ID is possible
- All in one analysing for antenna tuning and control
- FAT 2710 measures antenna, frequency, SWR and bandwidth by sweeping band of interest
- A cost-effective SWR Analyzer covering all major Cellular and mobile radio communication bands
- FAT 2710 gives you quick and reliable trouble-shooting



Specifications

| | |
|-----------------------------|---|
| Model | FAT 2710 (BN: 86817.001) |
| Application | Measurement of SWR in 50 Ω transmission lines |
| Frequency range | 30->2700 MHz entered as centre and span |
| Center Frequency | 30 to 2700 MHz. |
| Span | 0 to 2670 MHz. |
| Frequency stability | ± 50 ppm |
| Measurement range | 1.0<SWR<9.9, 0<dB<-30dB |
| Impedance | Nom. 50 Ω |
| Generator output | Approx. -4dBm |
| Max. input on test terminal | 100 mW |
| Tolerance on SWR reading | 30-650MHz) $\pm 5\%$; 650-1450MHz $\pm 10\%$; and 1450-2700MHz $\pm 15\%$ |
| Operating temperature range | 0° C-> + 50° C |
| Storage temperature range | -30°C -> + 50° C |
| Connectors | "N"-female RF test connector. USB A type for memory key. USB B type for serial PC communication. Mini DIN for RS232 communication up to 38400 Baud |
| Power supply | 4 NiMH type AA rechargeable batteries (Batteries, NiMH rechargeable and 230VAC/7.5VDC charger supplied) |
| Auto Power off NOT OK | For battery economy, FAT 2710 automatically turns off 3 min. after last entry |
| Normal operating use | Fully charged: More than 10 hours. |
| Colour | Silver/blue |
| Width | 82 mm |
| Depth | 31 mm |
| Height | 165 mm |
| Weight | 500 gram (incl. Batteries) |
| EMC | Complies with directive 89/336EEC as amended by 92/31EEC and 93/68/EEC |
| Standards | Emissions: EN 61000-6-4: 2001 Immunity: EN 61000-6-2: 2005 |
| Accessory | Soft carrying bag with RF-adaptor set, car charging cable and two 7/16 connectors |
| Order Number for Accessory: | BN: 86817.101 |

Please contact for technical information and orders:

SCHOMANDL-Vertriebs-GmbH
Bahnhofstraße 108 · D-83224 Grassau/Germany
Telephone: 08641-403-140 · Telefax: 08641-403-264
e-mail: info@schomandl.de · Internet: <http://www.schomandl.de>

Display forward, reflected power and VSWR

2 GHz to 6 GHz

Diagnose 802.11a,b and g WLAN

Accessory:

Soft carrying bag with SMA 50 Ohm load 6 GHz, RPSMA male BN 86817.104 to SMA female Adaptor, SMA male to RPSMA, SMA male to SMA male Adaptor and special 2,4 GHz SMA Antenna



Specifications

| | |
|-------------------------------|--------------------------|
| Model No.: | 86817.004 |
| Frequency range: | 2 – 6 GHz |
| Insertion loss: | <0.4dB |
| Absolute accuracy : | ±1dB |
| Power range indicated: | 1µW – 999mW |
| VSWR indicated: | 1.01 – 9.99 : 1 |
| Directivity: | >30dB |
| Peak Detect of: | <1mS pulse |
| Auto Power off | 1 minute |
| Power Supply: | 3Volt (2 X AAA Alkaline) |
| Max power consumption: | 50 mA |
| Operating time (no backlight) | 20 Hours |
| Optional Accessories: | SMA to RPSMA adaptors |
| Belt clip | Option |
| EMI/RFI | EN55022 /B |
| Dimensions: | |
| – Width: | 58 mm |
| – Depth: | 23 mm |
| – Height: | 105 mm |
| Weight incl. Batteries: | approx. 130g |
| Temperature: | |
| – Operating | 0 to 40°C |
| – Storage | -20 to 80°C |
| Colour: | |
| – Standard | White/Grey |

Broadcast RF Power Monitor Digital RF Power Meter




KATHREIN
Antennen · Electronic

Also available as 19" Rack mount Version:

1U Rack mount Power Monitor

including all options BN 86818.000

additional power, reflected power, VSWR calculation

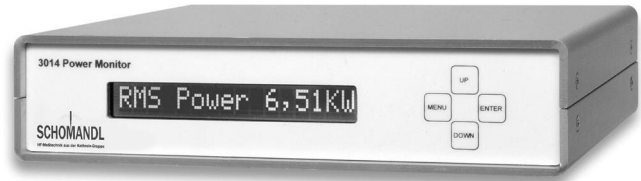

Accessory:

UHF Probe 1 or 2 required BN 86818.101

VHF Probe 1 or 2 required BN 86818.102

Specifications for Broadcast Power Monitor with external coupler

| | |
|---|---|
| Model No.: | 86818.002 |
| Frequency range: (Coupler dependent) | 50 – 860 MHz |
| Coupling Flatness , from 6dB/octave Probes 3015,3016 | ±0,2dB |
| Absolute accuracy after offset adjustment: | ±0,2dB (±4%) |
| True RMS Power range: | -34 dBm to +10 dBm |
| Peak Power range: | +24 dBm |
| Dynamic range: | > 50 dB |
| Power readout: Auto range 1KW – 999KW | 1024 steps |
| Coupler attenuation VHF @ 100MHz: | 43 dB to 73 dB |
| Coupler attenuation UHF @ 500MHz: | 50 dB to 80 dB |
| VSWR readout: | 1,00:1-9,99:1 |
| Remote Temperature Sensing | 0 – 99°C |
| Remote Voltage Sensing | 0-100VDC |
| Remote Current Sensing | 0-3V DC (1024 bits) |
| Relay Out/Digital Out: | Open Collector 50V/0,5A |
| Controller out for SNMP or dialup | RS232 1200- 9600 Bps |
| Power Supply: – AC power: | 90-264V @ 50-60Hz |
| Max power consumption: – AC | 10V/A |
| EMI/RFI | EN55022 /B |
| Connectors: – RF sensors – Power AC in rear Options: – Analogue/digital – RS232 | DB9 Female IEC DB9 Female DB9 Male |
| Dimensions: – Width: 19" unit – Depth: 1HU | 482.5 mm 180 mm 44 mm |
| Dimensions: – Width: Stand alone unit – Depth: – Height: | 216 mm 180 mm 53 mm |
| Weight: | approx. 1.8 kg |
| Temperature: – Operating -Storage | 5 to 50°C 20 to 80°C |
| Colour: – standard | Silver Anodised |
| Order Number for Accessory: | BN: 86817.101 |

Please contact for technical information and orders:

SCHOMANDL-Vertriebs-GmbH
Bahnhofstraße 108 · D-83224 Grassau/Germany
Telephone: 08641-403-140 · Telefax: 08641-403-264
e-mail: info@schomandl.de · Internet: http://www.schomandl.de

- Monitors RF fields
- Indicates RF pollution
- Alarm and Silent modes
- Broadband coverage
- General Safety According to WHO ICNIRP
- Alarm 2W/m² or 10W/m²









Specifications for Broadcast Power Monitor with external coupler

| | |
|--|--|
| Model No.: | 86817.003 |
| Frequency range: | 10 – 10000 MHz |
| Frequency response | ICNIRP |
| Absolute accuracy 400–2500MHz: | ±6dB |
| Power range indicated: | 0.1 – 100 W/m ² |
| Field strength indicated: | 19 – 137 V/m |
| Dynamic range: | >30dB |
| Audio Alarm | 80dBa |
| LED Alarm always enabled | 15mcd |
| Normal Mode Audio and LED Alarm: (–) | 2W/m ² – 28V/m or 10W/m ² – 137V/m |
| Timed Mode Silent in: (– –) | 5 minutes |
| Audible Alarm Off Mode: (– – –) | Never |
| Power Supply: | 3Volt (2 X AAA Alkaline) |
| Max power consumption no alarm: | 110µA |
| Operating time (no Audio Alarm) | +500 Days |
| Belt clip included | |
| EMI/RFI | EN55022 /B |
| Dimensions: | |
| – Width: | 58 mm |
| – Depth: | 23 mm |
| – Height: | 105 mm |
| Weight incl. Batteries: | approx. 88g |
| Temperature: | |
| – Operating | –10 to 40°C |
| – Storage | –20 to 80°C |
| Colour: | |
| – Standard | Black/Grey |

| | Page |
|--|------|
| Mounting Configurations | 202 |
| Dimensions of Panels | 203 |
| Colour Coding for Connectors on outdoor Base Station Antennas | 204 |
| Modified Product Line of Mounting Parts | 205 |
| Amount of needed Clamps per Panel Type | 206 |
| Clamps | 207 |
| Downtilt kit “L” | 208 |
| Downtilt kit “L” and “M” | 209 |
| Downtilt kit “H” | 210 |
| Azimuth Adjustment Kits | 211 |
| 3 Sector Clamps | 212 |
| Offset | 213 |
| 2x Panel Mounting Kit | 214 |
| Tension Band | 216 |
| Side-mounting Clamp Omnis | 217 |
| Azimuth Adjustment Tool | 220 |
| Installation Tool Triple-band Antennas | 221 |


The hereinafter referred to “wind load category L - M - H” correspond to the defined “category of mounting hardware” given in the respective data sheets.

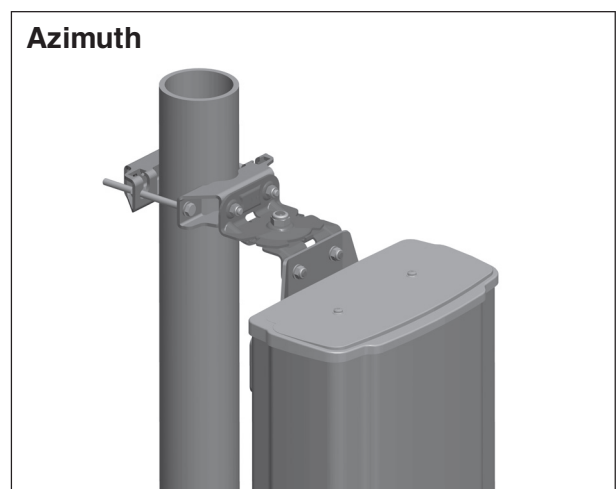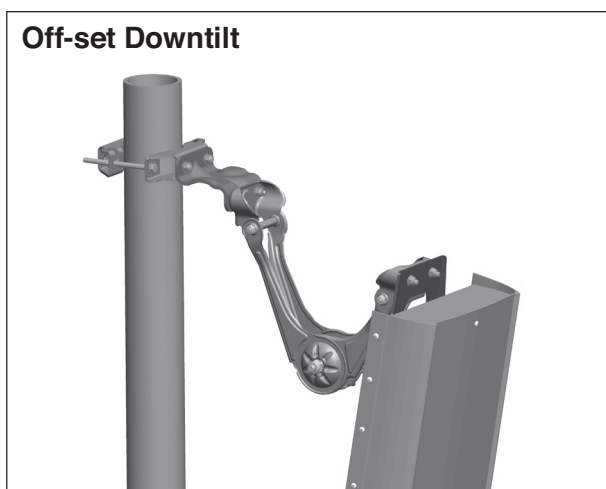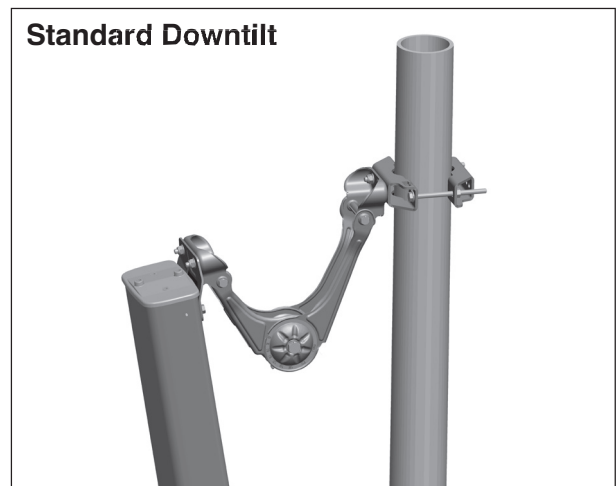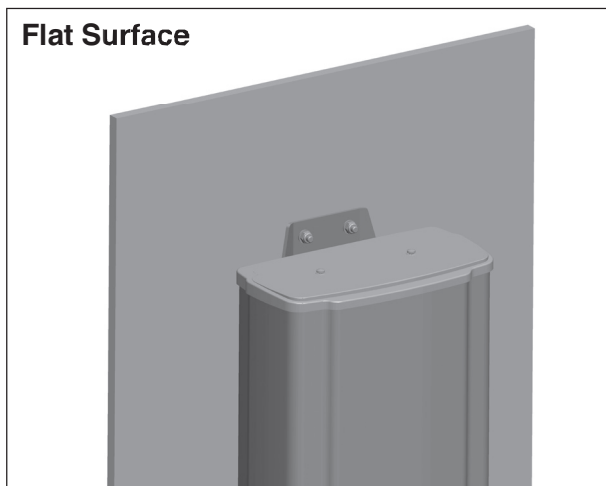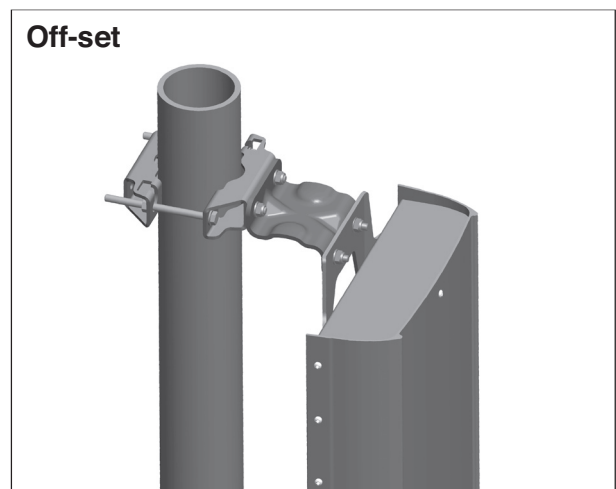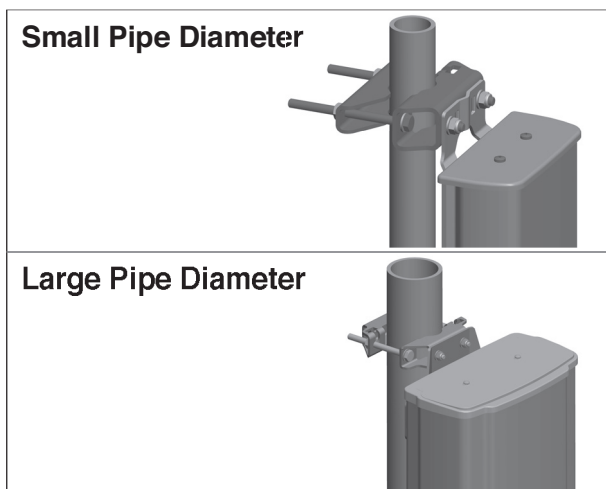


















Antenna dimensions and detailed connector position can be found on our current data sheets. Please refer to the information on page 2 of our latest data sheets which are available on our homepage:

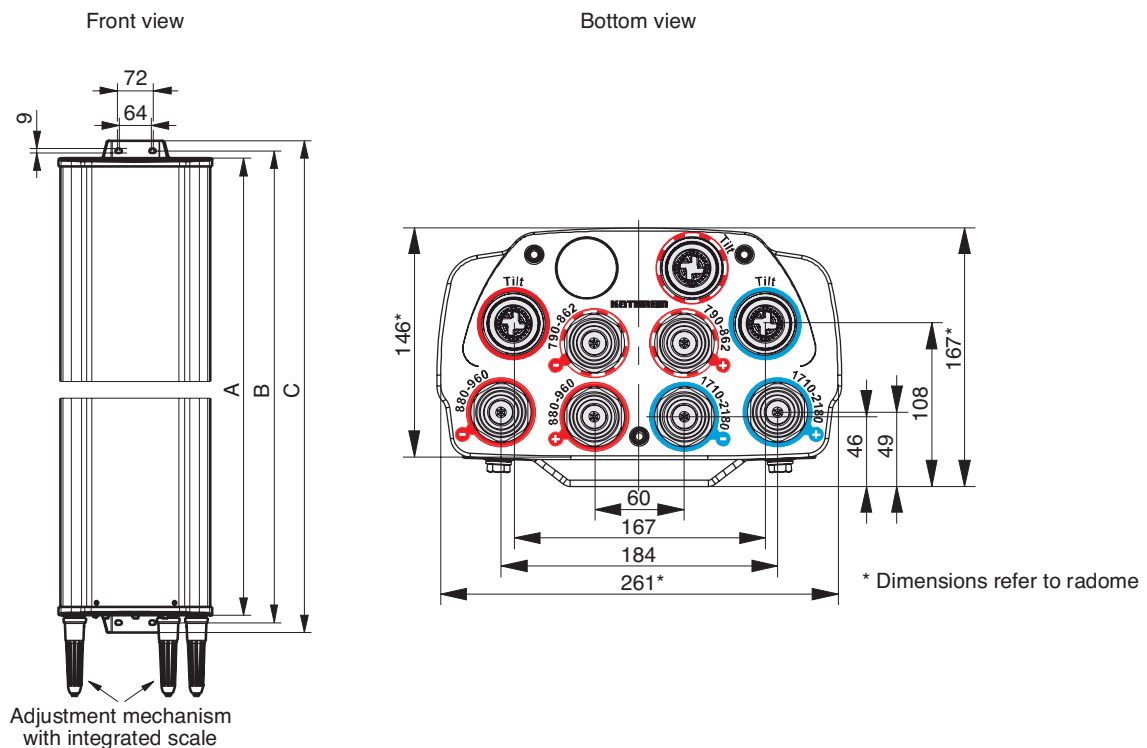www.kathrein.de
– Base station system products
– Product search











An example is shown below of how the antenna dimensions are displayed on our data sheets:



Colour Coding for Connectors on outdoor Base Station Antennas

| | First coding | Second coding | Third coding |
|-----------------------------|--|--|--|
| Frequency range (MHz) | Frequency range us not devided | Frequency range is split into 2 bandwidths or 2 separate systems within same frequency range | Frequency range is split into 3 bandwidths or 3 separate systems within same frequency range |
| Low band 694 ... 960 | Base colour Red Continuous line |  Broken line |  Dotted line |
| High-band 1710 ... 2200 | Base colour Blue Continuous line |  Broken line |  Dotted line |
| incl. LTE 2.6 1710 ... 2690 | Base colour Yellow Continuous line |  Broken line |  Dotted line |
| Dual-band antenna | <p>Dual-band filterantenna // 2.6 GHz</p>  <p>Standard Dual-band 800 MHz // 2.6 GHz</p>  <p>Standard Dual-band 800 MHz // 2.6 GHz Combiner Version</p>  <p>Dual-band 800 MHz // 2.6 GHz</p>  | <p>Side-by-side 900 // 900 MHz</p>  <p>Side-by-side 800 // 900 MHz</p>  | not available |
| Triple-band antenna | <p>Filterantenna Triple-band 900 MHz // 2 // 2.6 GHz</p>  | <p>Filterantenna Triple-band 800 // 900 MHz // 2 GHz</p>  <p>Stacked Triple-band 900 MHz // 2.6 // 2.6 GHz</p>  | <p>Triple-band 2.6 // 2.6 // 2.6 GHz</p>  |
| Quad-band antenna | not available | <p>Filterantenna Quad-band 800 // 1800 MHz // 2 // 2.6 GHz</p>  <p>Quad-band 800 // 1800 MHz // 2 // 2.6 GHz</p> | no example available yet |

Modified Product Line of Mounting Parts


| Type | Windload Classification | Pole Diameter in mm | Type No. | Remark | |
|---|-------------------------|---------------------|----------|---|--------------------|
| Clamp  | light / medium | ∅ 28 – 64 | 731651 | Modified product | |
| | light / medium / heavy | ∅ 42 – 115 | 738546 | | |
| | light / medium / heavy | ∅ 110 – 220 | 85010002 | | |
| | | ∅ 210 – 380 | 85010003 | | |
| Downtilt kit  | light | | 732317 | Modified product | |
| | | | 732318 | | |
| | | | 732321 | | |
| | | | 732322 | | |
| | | | 732327 | | |
| Downtilt kit  | light / medium | | 737971 | Modified product | |
| | | | 737972 | | |
| | | | 737973 | | |
| | | | 737974 | | |
| | | | 737975 | | |
| | | | 737976 | | |
| | | | 737977 | | |
| | | | 737978 | | |
| Downtilt kit  | heavy | New product | 85010008 | Replacement for 85010007 | |
| Azimuth Adjustment Kit  | light / medium | | 85010014 | Pole mounting adjustment angle ±30° (additional clamp needed) | |
| | heavy | | 85010015 | | |
| Azimuth Adjustment Kit  | light / medium | | 85010016 | Wall mounting adjustment angle ±30° | |
| | heavy | | 85010017 | | |
| 3 Sector Clamp  | light / medium | ∅ 88.9 | 742263 | | |
| | | ∅ 88.9 | 742317 | | New product |
| | | ∅ 114.3 | 742033 | | |
| | heavy | ∅ 139.7 | 742034 | | |
| | | ∅ 114.3 | 85010058 | | New product |
| | | ∅ 139.7 | 85010059 | | New product |
| Offset  | light / medium | New product | 85010060 | Clearance between pole and antenna (additional clamp needed) | |
| | heavy | New product | 85010061 | | |
| 2x Panel Mounting Kit  | light / medium | | 742113 | Additional clamp needed | |
| | heavy | | 85010006 | | |
| Tension Band  | light | ∅ 34 – 60 | 734360 | Please note: Only usable without downtilt kit | |
| | | ∅ 60 – 80 | 734361 | | |
| | | ∅ 80 – 100 | 734362 | | |
| | | ∅ 100 – 120 | 734363 | | |
| | | ∅ 120 – 140 | 734364 | | |
| | | ∅ 45 – 125 | 734365 | | |

Mounting Hardware

Amount of needed clamps


VPol 800/900
All other Panels

2 pcs

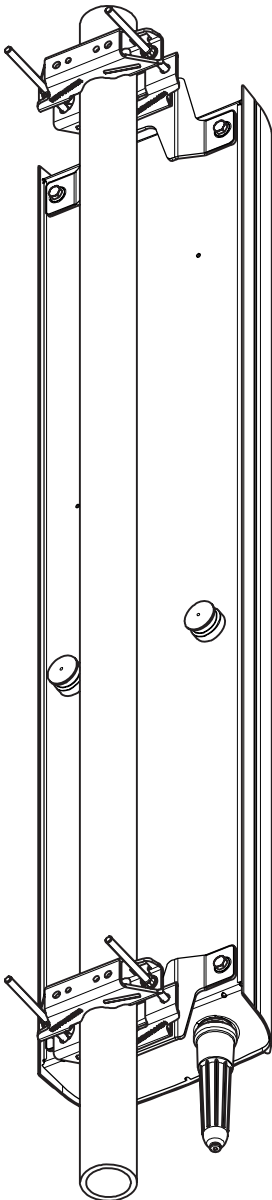

VPol 800/900
Antenna height: 264 mm

1 pc

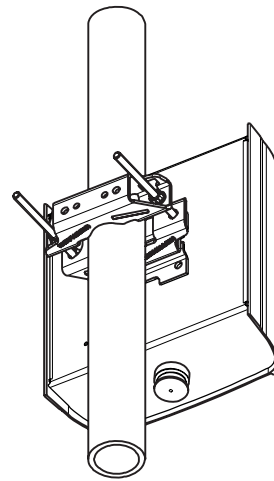




Panel Accessories

Mounting Hardware

Clamps

Clamps

| Type No. | 731651 | 738546 | 85010002 | 85010003 |
|----------------------------|--|--|--|-------------------------------------|
| Suitable for mast diameter | 28 – 60 mm | 42 – 115 mm | 110 – 220 mm | 210 – 380 mm |
| Antenna – mast distance F | 25 – 28 mm | 20 – 26 mm | 47 – 55 mm | 48 – 68 mm |
| Number of pieces | 1 clamp | 1 clamp | 1 clamp | 1 clamp |
| Material – Clamp | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel |
| – Screws | Hot-dip galvanized steel/ Stainless steel | Hot-dip galvanized steel/ Stainless steel | Hot-dip galvanized steel/ Stainless steel | Stainless steel/ Stainless steel |
| – Nuts | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| Weight | 0.8 kg | 1.1 kg | 2.7 kg | 4.8 kg |

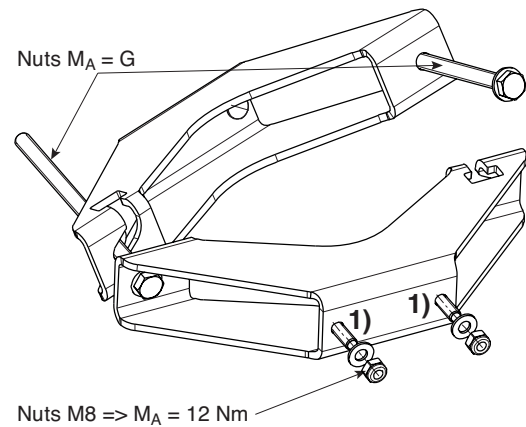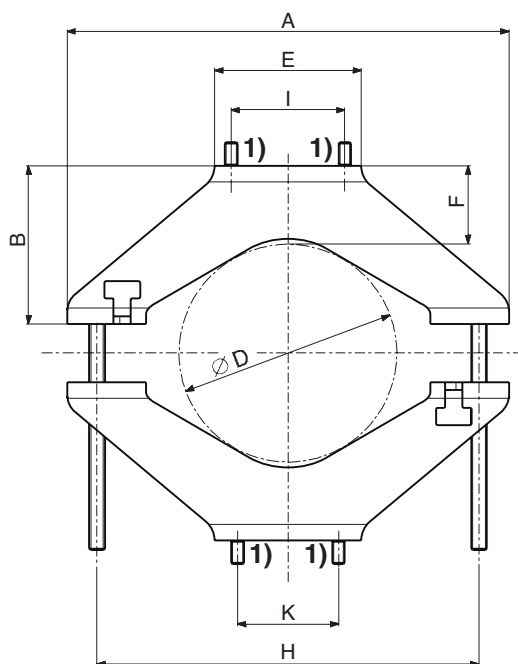


1) Modified version with studs will be supplied from middle of 2012 onwards. Until then the clamps will be delivered as previously specified (with mounting holes).

| Type No. | A | B | C | D | E | F | G | H | I | K |
|----------|--------|--------|-------|--------------|--------|------------|-------|--------|-------|-------|
| 731651 | 116 mm | 40 mm | 40 mm | 28 – 60 mm | 93 mm | 25 – 28 mm | 20 Nm | 84 mm | – | 64 mm |
| 738546 | 152 mm | 40 mm | 40 mm | 42 – 115 mm | 93 mm | 20 – 26 mm | 25 Nm | 125 mm | 72 mm | 64 mm |
| 85010002 | 280 mm | 100 mm | 50 mm | 110 – 220 mm | 93 mm | 47 – 55 mm | 35 Nm | 240 mm | 72 mm | 64 mm |
| 85010003 | 442 mm | 150 mm | 50 mm | 210 – 380 mm | 150 mm | 48 – 68 mm | 35 Nm | 392 mm | 72 mm | 64 mm |

Please note: Kathrein does not recommend to use counter nuts.
The additional nuts supplied are only meant as spares.


Standard Downtilt kit for Panel Antennas (Wind load Category “L”)

Antenna height: 502 mm
662 mm
982 mm
1302 mm

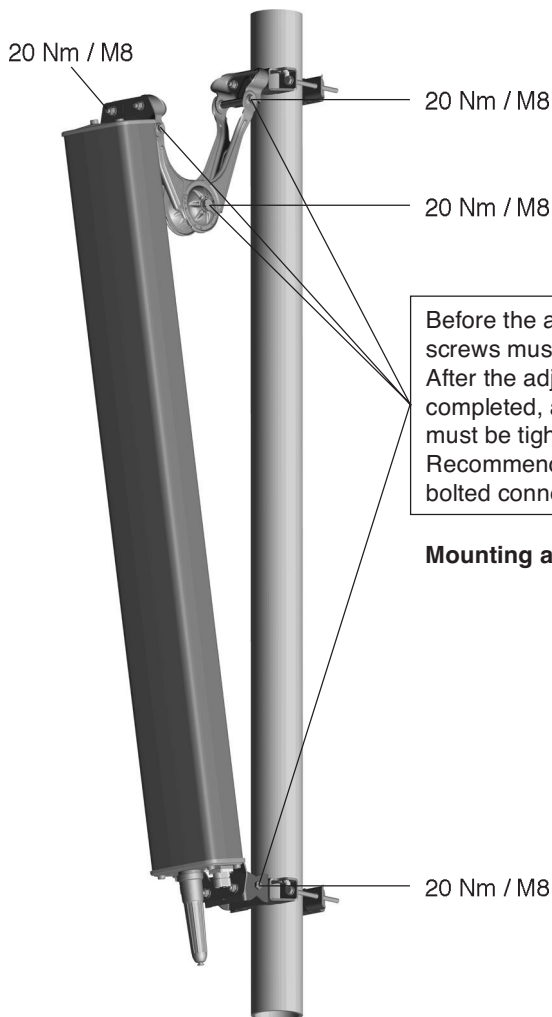

Before the adjustment, all joint screws must be loosened. After the adjustment has been completed, all loosened screws must be tightened. Recommended torque for M8 bolted connections: 20 Nm.

Mounting accessories included.

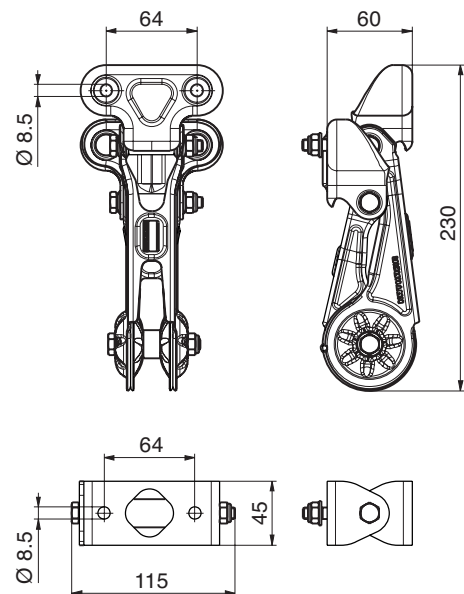

For heights not mentioned in this table please use downtilt kit 732327.


| Downtilt angle | | Downtilt kit with scale | Downtilt kit without scale* | Weight | Material |
|----------------|----------------|-------------------------|-----------------------------|-------------------|--|
| Antenna height | Downtilt angle | Type No. | Type No. | | |
| 502 mm | 0° – 25° | 732322 | 732327 | Approx. 1.3 kg | All parts: Hot-dip galvanized steel Nuts / washers: Stainless steel |
| 662 mm | 0° – 19° | 732321 | | | |
| 982 mm | 0° – 13° | 732318 | | | |
| 1302 mm | 0° – 10° | 732317 | | | |

* Instructions to adjust the required downtilt angle are given in the datasheet or on the rearside of the antenna.

Mounting a downtilt kit enlarges the spacing between mast and antenna by 42 mm.


Standard Downtilt kit for Panel Antennas (Wind load Category “L” and “M”)

Antenna height: 654 – 735 mm
974 – 1032 mm
1294 – 1306 mm
1934 – 1946 mm
2254 / 2256 mm
2574 – 2582 mm

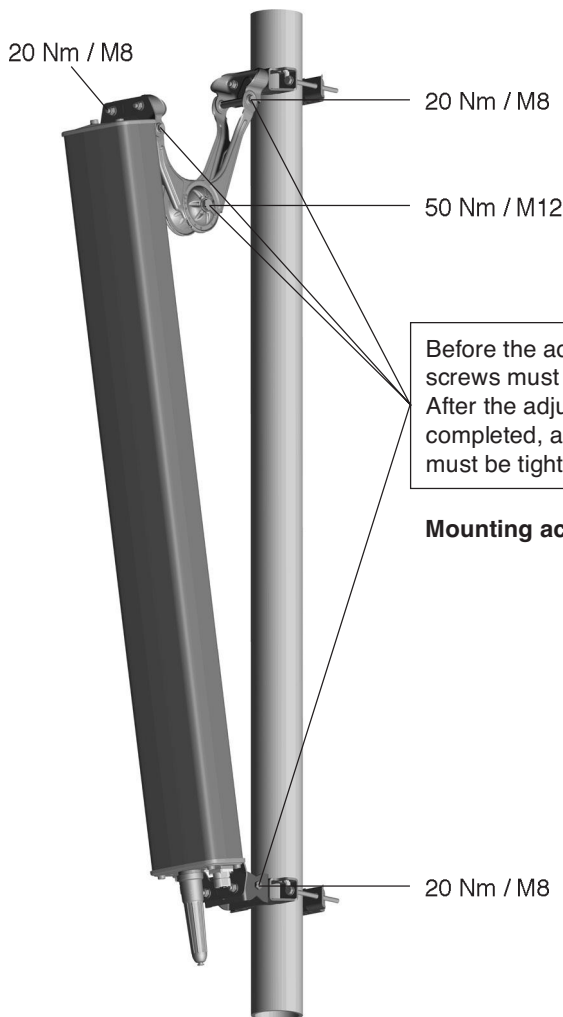

Before the adjustment, all joint screws must be loosened.
After the adjustment has been completed, all loosened screws must be tightened.

Mounting accessories included.

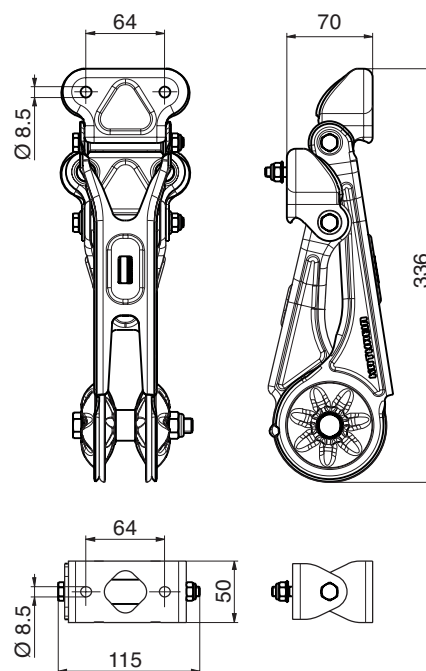

For heights not mentioned in this table please use downtilt kit 737978.

| Downtilt angle | | Downtilt kit with scale | Downtilt kit without scale* | Weight | Material |
|----------------|----------------|-------------------------|-----------------------------|-------------------|--|
| Antenna height | Downtilt angle | Type No. | Type No. | | |
| 654 – 735 mm | 0° – 30° | 737972 | 737978 | Approx. 2.3 kg | All parts: Hot-dip galvanized steel Nuts / washers: Stainless steel |
| 974 – 1032 mm | 0° – 21° | 737973 | | | |
| 1294 – 1306 mm | 0° – 16° | 737974 | | | |
| 1934 – 1946 mm | 0° – 11° | 737975 | | | |
| 2254 / 2256 mm | 0° – 9° | 737977 | | | |
| 2574 – 2582 mm | 0° – 8° | 737971 | | | |

* Instructions to adjust the required downtilt angle are given in the datasheet or on the rearside of the antenna.

Mounting a downtilt kit enlarges the spacing between mast and antenna by 84 mm.


Use the downtilt kit together with the clamps Type No. 731651, 738546, 85010002, 85010003, 85010014 for pole mounting and 85010016 for wall mounting.

Standard Downtilt kit for Panel Antennas (Wind load Category “H”)

Special downtilt kit for Panel antennas with a higher wind load.


Downtilt kit

| | |
|------------------------|---|
| Type No. | 85010008 |
| Preferred range of use | – Panel antennas with a higher wind load – Panel antennas with attached mounting plates – Downtilt kit without scale for universal use |
| Weight | 6.5 kg |
| Material | Hot-dip galvanized steel |
| Screws | Hot-dip galvanized steel / stainless steel |
| Nuts | Stainless steel |

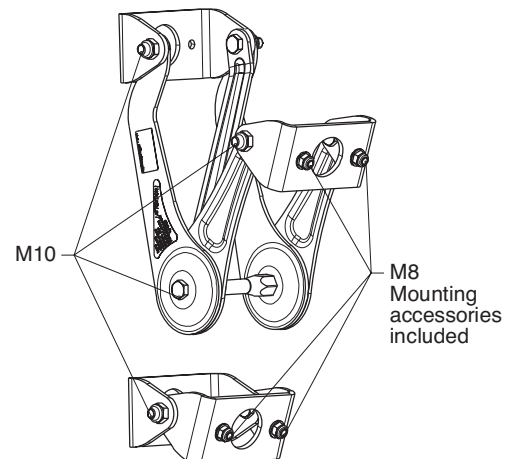

Recommended mast clamps:

| Type No. | Description | Mast diameter | Weight approx. | Units per antenna |
|----------|-------------|---------------|----------------|-------------------|
| 738546 | 1 clamp | 42 – 115 mm | 1.1 kg | 2 |
| 85010002 | 1 clamp | 110 – 220 mm | 2.9 kg | 2 |
| 85010003 | 1 clamp | 210 – 380 mm | 4.8 kg | 2 |

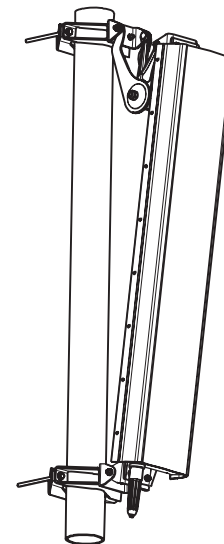

Recommended torque for all bolted connections:


| Screw size | Torque |
|------------|--------|
| M8 | 20 Nm |
| M10 | 50 Nm |

Maximum acceptable load:





| | |
|-------------------|----------|
| Frontal wind load | < 5000 N |
| Lateral wind load | < 1300 N |

Downtilt angle

| Antenna height | Downtilt angle |
|----------------|----------------|
| 1498 mm | 0° – 13° |
| 2058 mm | 0° – 10° |
| 2516 mm | 0° – 8° |
| 2628 mm | 0° – 8° |

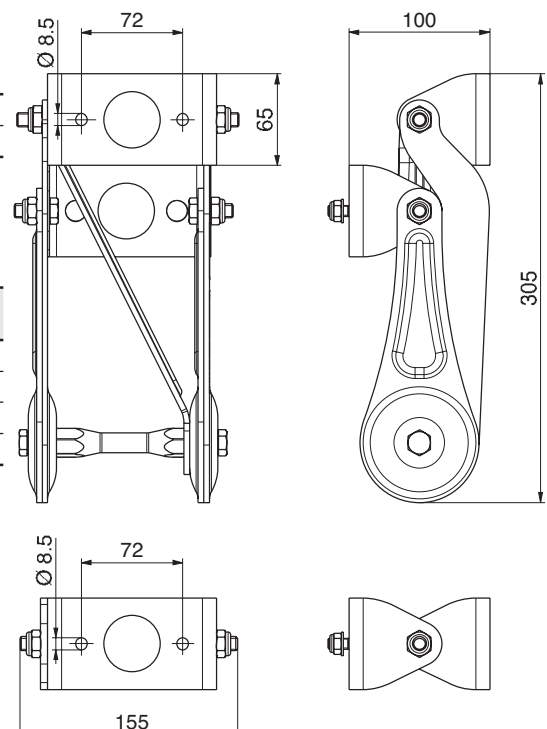

All Panels Mounting Hardware Azimuth Adjustment Kits

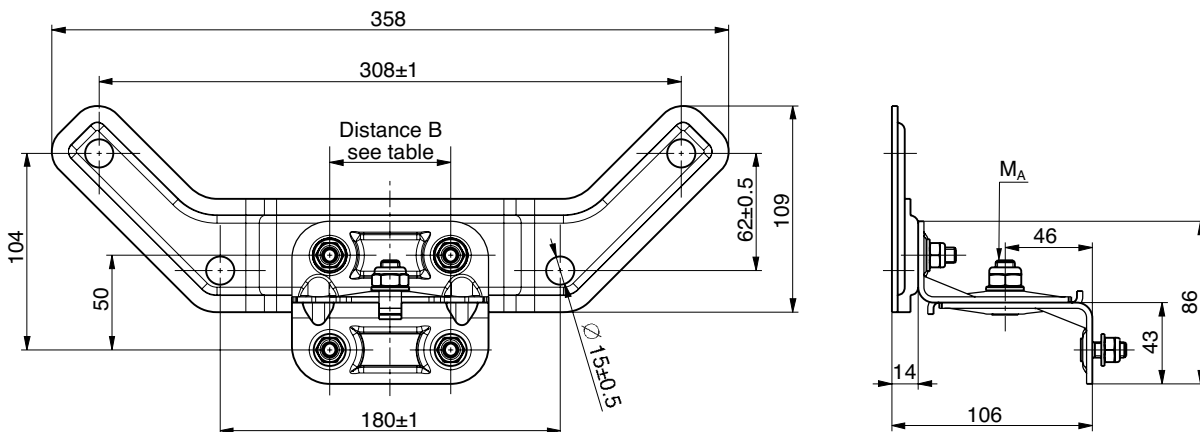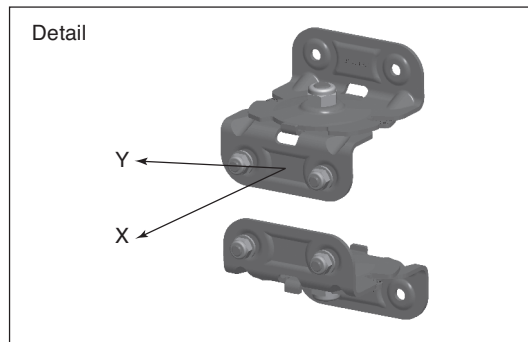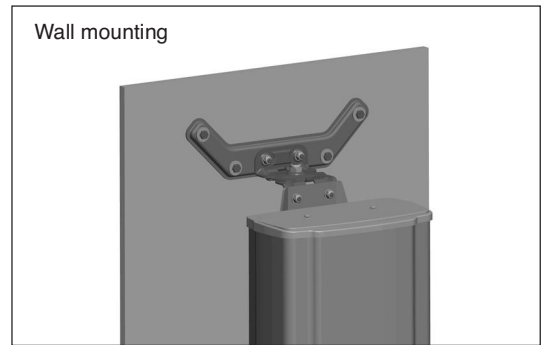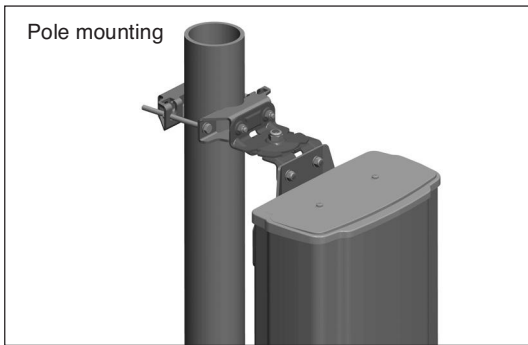

The azimuth adjustment kit for pole mounting can be mounted with all suitable clamps, 3-Sector clamps and 2x A-/C-/F-Panel mounting kits (with the latter only as an interface between mounting kit and antenna).

| Type No. | 85010014 | 85010015 | 85010016 | 85010017 |
|------------------------------------|--|----------------|--|----------------|
| Suitable for | pole mounting | | wall mounting | |
| Number of pieces | 2 brackets | 2 brackets | 2 brackets | 2 brackets |
| Distance between screws [B] | 64 mm | 72 mm | 64 mm | 72 mm |
| Angular range | ± 30° | | ± 30° | |
| Weight / kit | approx. 1260 g | approx. 1260 g | approx. 2500 g | approx. 2500 g |
| Supplied mounting accessories | all screws | | Screws and dowels for wall fastening are not supplied, they must be chosen by installer according to on-site requirements. | |
| | Adapter for downtilt kit 7323xx series | | Adapter for downtilt kit 7323xx series | |
| Materials | Parts are hot-dip galvanized steel; Captive nuts are stainless steel | | | |
| Max. permissible static load / kit | | | | |
| – X direction | 2150 N | 5100 N | 2150 N | 5100 N |
| – Y direction | 760 N | 1350 N | 760 N | 1350 N |

**Recommended torque: Screws M6: 8 Nm; Screws M8: 20 Nm; MoS₂ greased.
Minimum torque MA: 30 Nm; MoS₂ greased**

3 Sector Panel Arrangement





3 Sector Clamp Kit

Mounting Hardware

- Slim and unobtrusive design.
- Nearly cylindrical optical appearance with small outer diameter.
- Suitable for all Panels with an antenna housing width less than 400 mm (H_{max}).

Please note:

Panels with connector position “Rearside” fit only with downtilt kit azimuth adjustment kit or offset mounted in-between.

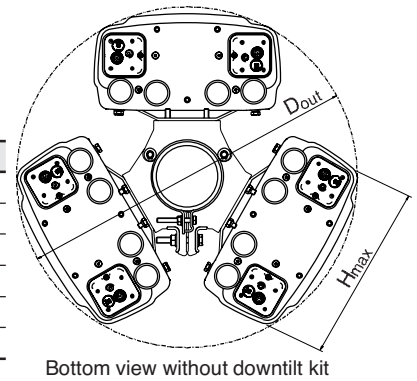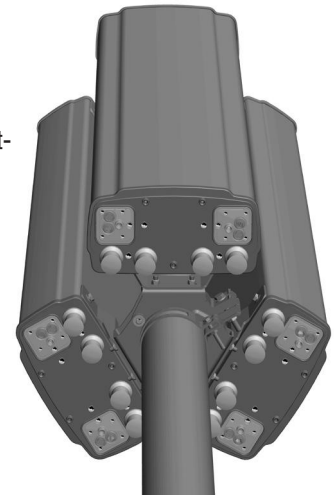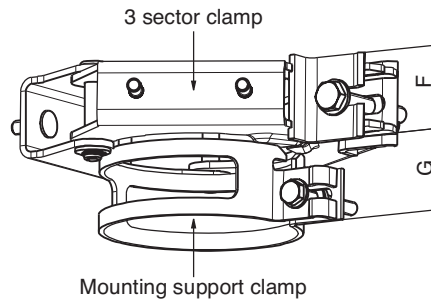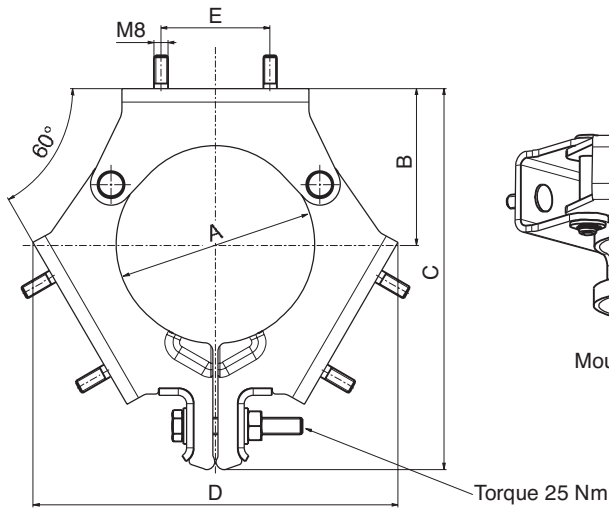

| Type No. | A | B | C | D | E | F | G | H_{max} | Weight |
|----------|-------|-----|-----|-----|----|----|----|-----------|--------|
| 742263 | 88.9 | 65 | 180 | 168 | 64 | 50 | 45 | 280 | 4 kg |
| 742317 | 88.9 | 88 | 213 | 199 | 64 | 50 | 45 | 361 | 4 kg |
| 742033 | 114.3 | 92 | 217 | 207 | 64 | 50 | 45 | 375 | 4 kg |
| 742034 | 139.7 | 100 | 236 | 228 | 64 | 50 | 45 | 400 | 4 kg |
| 85010058 | 114.3 | 92 | 217 | 207 | 72 | 50 | 45 | 375 | 4 kg |
| 85010059 | 139.7 | 100 | 236 | 228 | 72 | 50 | 45 | 400 | 4 kg |

All dimensions in mm.
 D_{out} is determined by mounted components.

3 Sector Clamp Kit (Antenna Wind load Category “L” and “M”)

| Type No. | 742263 | 742317 | 742033 | 742034 |
|----------------------------|--|--|--|--|
| Angle between antennas | 120° | 120° | 120° | 120° |
| Suitable for mast diameter | 88.9 mm | 88.9 mm | 114.3 mm | 139.7 mm |
| Number of pieces | 2 x 3 sector clamp 2 x mounting support clamp | 2 x 3 sector clamp 2 x mounting support clamp | 2 x 3 sector clamp 2 x mounting support clamp | 2 x 3 sector clamp 2 x mounting support clamp |
| Material | | | | |
| – 3 sector clamp | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel |
| – Mounting support clamp | Aluminum | Aluminum | Aluminum | Aluminum |
| – Screws | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel | Hot-dip galvanized steel |
| – Nuts | Stainless steel | Stainless steel | Stainless steel | Stainless steel |

3 Sector Clamp Kit (Antenna Wind load Category “H”)



| Type No. | 85010058 | 85010059 |
|----------------------------|--|--|
| Angle between antennas | 120° | 120° |
| Suitable for mast diameter | 114.3 mm | 139.7 mm |
| Number of pieces | 2 x 3 sector clamp 2 x mounting support clamp | 2 x 3 sector clamp 2 x mounting support clamp |
| Material | | |
| – 3 sector clamp | Hot-dip galvanized steel | Hot-dip galvanized steel |
| – Mounting support clamp | Aluminum | Aluminum |
| – Screws | Hot-dip galvanized steel | Hot-dip galvanized steel |
| – Nuts | Stainless steel | Stainless steel |

Mounting Hardware Offset for Panel Antennas

| Type No. | 85010060 | 85010061 |
|------------------------------|---|----------|
| Wind load category | "L" and "M" | "H" |
| Quantity needed per antenna | 2 x spacer | |
| Material: – spacer – nuts | Hot-dip galvanized steel Stainless steel | |
| Dimension "A" | 64 mm | 72 mm |
| Weight | 0.65 kg | |
| Scope of supply | 1 x spacer, Fitting accessories | |

Recommended torque for M8 bolted connections: 20 Nm

Please use the offset in combination with clamps corresponding to the pole diameter.

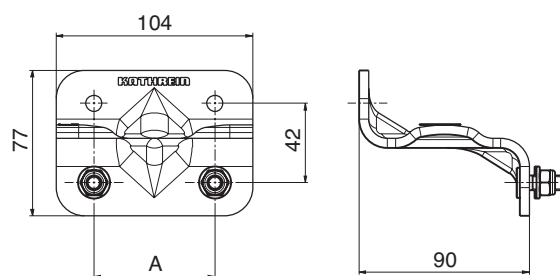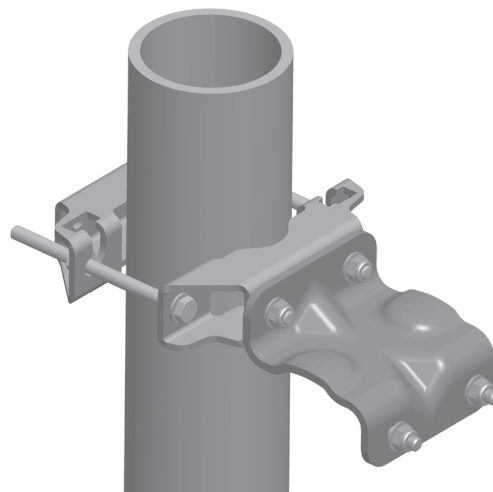

Mounting accessories (order separately)
Possible clamps in combination with:

85010060

| Type No. | Description | Mast diameter | Weight approx. | Units per antenna |
|----------|--------------------|---------------|----------------|-------------------|
| 731651 | 1 clamp | 28 – 64 mm | 0.8 kg | 2 |
| 738546 | 1 clamp | 42 – 115 mm | 1.1 kg | 2 |
| 85010002 | 1 clamp | 110 – 220 mm | 2.9 kg | 2 |
| 85010003 | 1 clamp | 210 – 380 mm | 4.8 kg | 2 |
| 742263 | 2 x 3 sector clamp | 88.9 mm | 4.0 kg | 1 |
| 742317 | 2 x 3 sector clamp | 88.9 mm | 4.0 kg | 1 |
| 742033 | 2 x 3 sector clamp | 114.3 mm | 4.0 kg | 1 |
| 742034 | 2 x 3 sector clamp | 139.7 mm | 4.0 kg | 1 |

85010061

| Type No. | Description | Mast diameter | Weight approx. | Units per antenna |
|----------|--------------------|---------------|----------------|-------------------|
| 738546 | 1 clamp | 42 – 115 mm | 1.1 kg | 2 |
| 85010002 | 1 clamp | 110 – 220 mm | 2.9 kg | 2 |
| 85010003 | 1 clamp | 210 – 380 mm | 4.8 kg | 2 |
| 85010058 | 2 x 3 sector clamp | 114.3 mm | 4.0 kg | 1 |
| 85010059 | 2 x 3 sector clamp | 139.7 mm | 4.0 kg | 1 |

If a downtilt kit is used, please choose the fitting one from the antenna data sheet.

Panel Accessories



2 x Panel Mounting Kit for Panels width 112 mm and 155 mm

Use this mounting kit only for Panels with a maximum width of 160 mm.
Wind load category: L (Light) or M (Medium)


2 x Panel Mounting Kit

| | |
|--|---|
| Type No. | 742113 |
| Contents | 2 x brackets and mounting accessories |
| Material: – Clamp and screws – Nuts and washers | Hot-dip galvanized steel Stainless steel |
| Weight | Approx. 1.6 kg |


Recommended torque for M8 bolted connections: 20 Nm

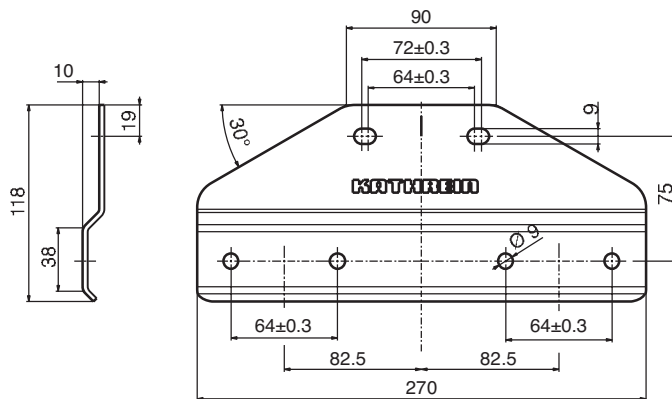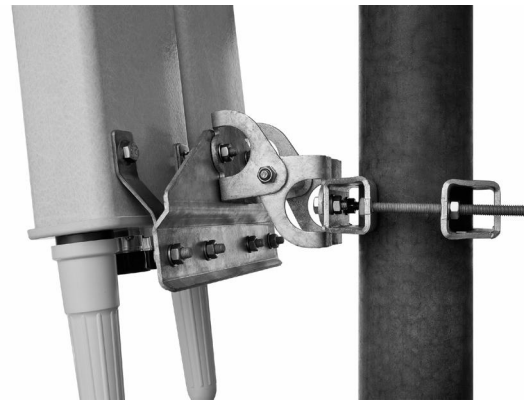

Configuration without mechanical downtilt

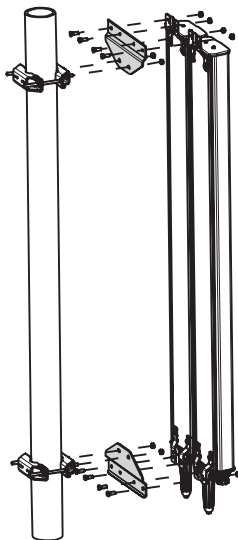

Configuration with mechanical downtilt

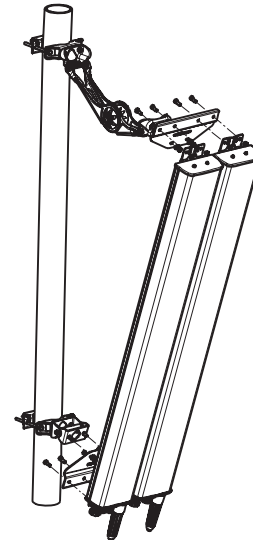

Use the 2 x Panel Mounting Kit together with the following mounting accessories


| Type No. | Description | Remarks | Weight approx. | Units per antenna |
|----------|----------------|--|----------------|-------------------|
| 731651 | 1 clamp | Mast: 28 – 60 mm diameter | 0.8 kg | 2 |
| 738546 | 1 clamp | Mast: 42 – 115 mm diameter | 1.1 kg | 2 |
| 85010002 | 1 clamp | Mast: 110 – 220 mm diameter | 2.7 kg | 2 |
| 85010003 | 1 clamp | Mast: 210 – 380 mm diameter | 4.8 kg | 2 |
| 85010060 | 1 offset | in combination with the clamps | 1.3 kg | 2 |
| 737978 | 1 downtilt kit | Downtilt angle: depending on antenna height | 2.3 kg | 1 |

For a three sector panel arrangement, use the mounting kit type no. 742113 together with the three sector clamp 742213, 742033 or 742034. Three sector clamp 742263 does not match.

If a downtilt kit is used, please choose the fitting one from the antenna datasheet.




Panels VPol / XPol 800/900 Panels XXPoI 800/900 / 1800/2000 2 x Panel Mounting Kit

Use this mounting kit only for Panels with a maximum width of 262 mm.
Wind load category: H (Heavy)

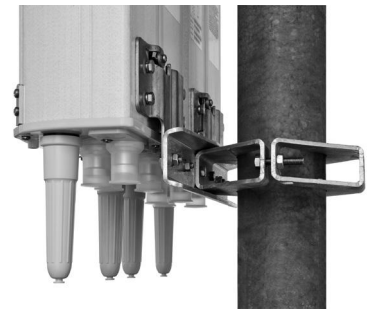

| | |
|--|---|
| Type No. | 85010006 |
| Contents | 2 x brackets and mounting accessories |
| Material: – Clamp and screws – Nuts and washers | Hot-dip galvanized steel Stainless steel |
| Weight | Approx. 3.3 kg |

Recommended torque for M8 bolted connections: 20 Nm

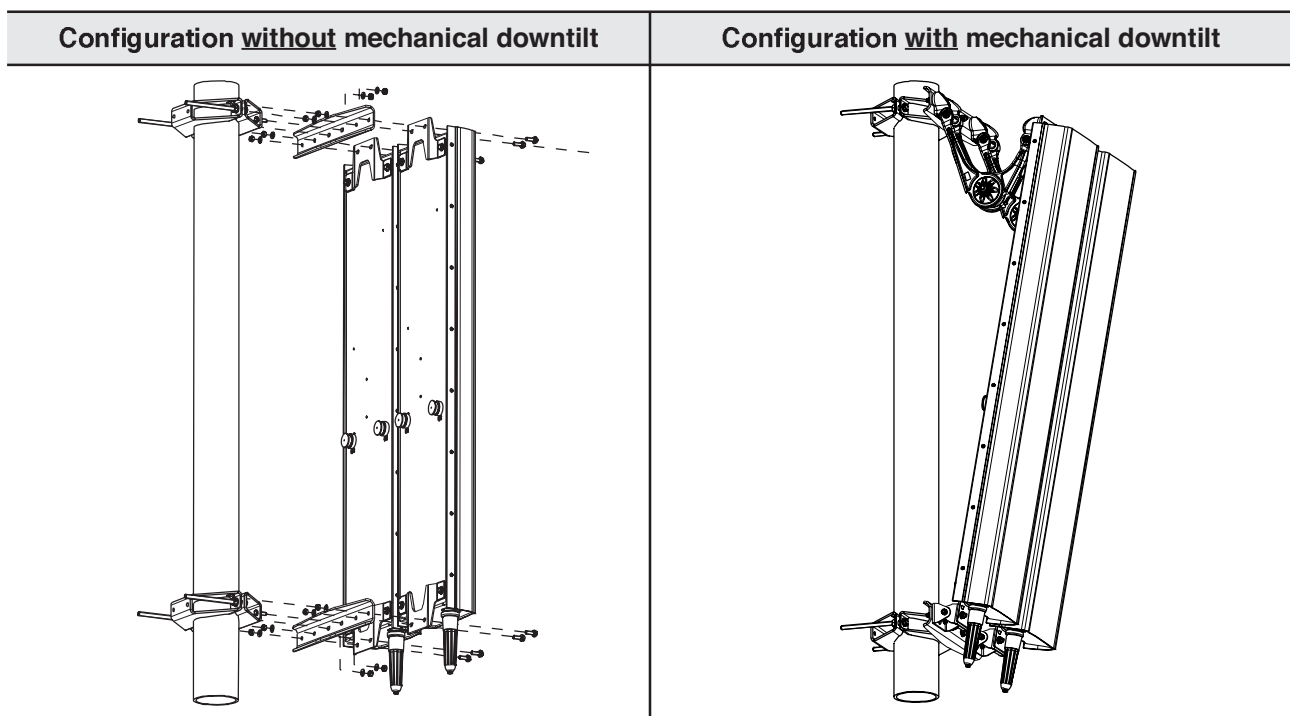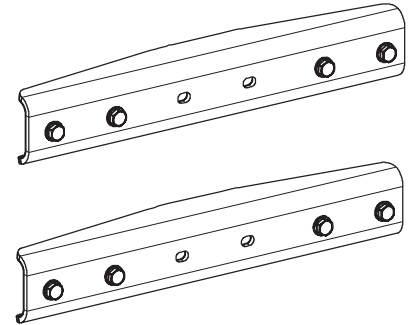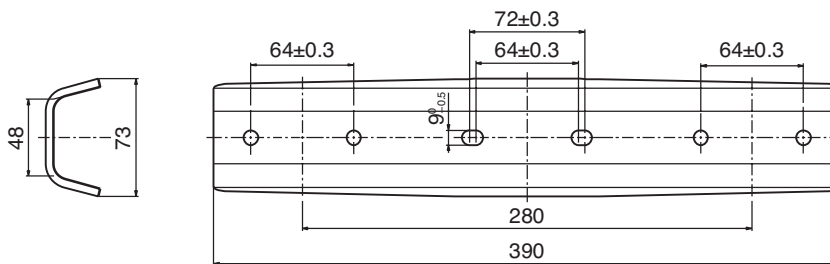

Mounting Accessories (order separately)


Clamps (only the listed clamps are allowed!)

| Type No. | Description | Remarks | Weight approx. | Units per antenna |
|----------|-------------|--------------------------------|----------------|-------------------|
| 85010002 | 1 clamp | Mast: 110 – 220 mm diameter | 2.7 kg | 2 |
| 85010003 | 1 clamp | Mast: 210 – 380 mm diameter | 4.8 kg | 2 |
| 85010061 | 1 offset | in combination with the clamps | 1.3 kg | 2 |

If a downtilt kit is used, please choose the fitting one from the antenna datasheet.

Mounting Hardware Tension Band for Panel Antennas (Wind load Category “L”)

| Type No. | 734360 | 734361 | 734362 | 734363 | 734364 | 734365 |
|----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Suitable for mast diameter | 34 – 60 mm | 60 – 80 mm | 80 – 100 mm | 100 – 120 mm | 120 – 140 mm | 45 – 125 mm |
| Material | Stainless steel | Stainless steel | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| Weight (approx.) | 0.06 kg | 0.07 kg | 0.08 kg | 0.09 kg | 0.11 kg | 0.08 kg |

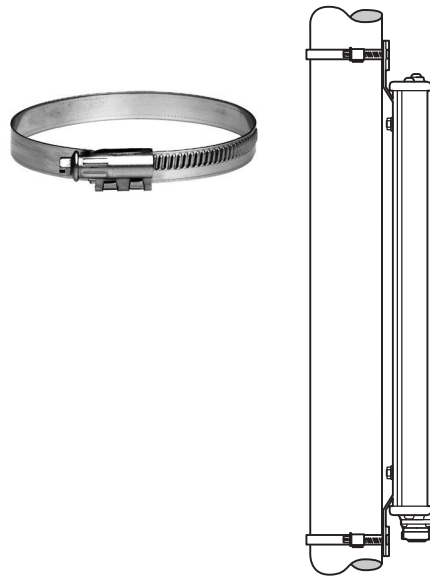


**Please note:
Only usable without downtilt kit!**

Side-mounting Clamp Omnidirectional Antennas Large Pipe

Type No. 738908

For masts of 94 – 125 mm diameter

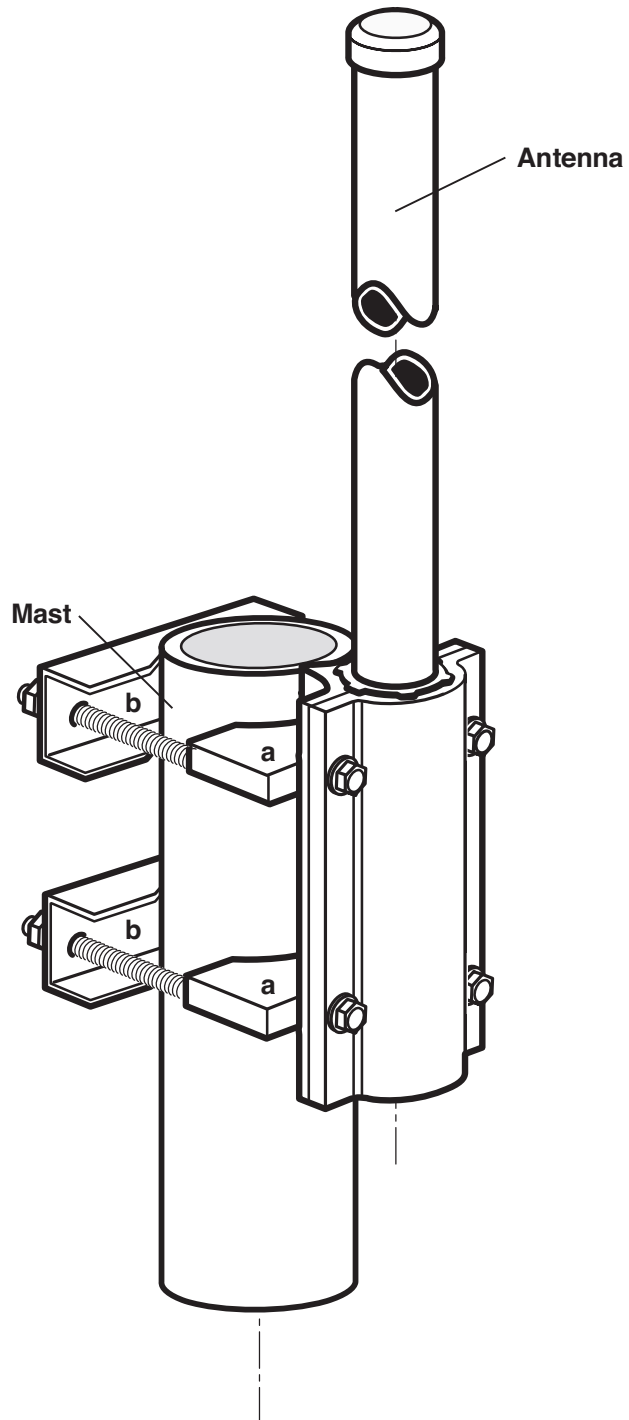


Side-mounting Bracket Omnidirectional Antennas

Type No. 737398

Side-mounted bracket

(for mast diameters of 40 – 105 mm)

| Type No. | 737398 | | | |
|---------------------------|--------------------|-----------------|-------------|------------------|
| Bracket | At the bottom only | | | |
| Fits for antenna type no. | 800/900 MHz | 1800 MHz | UMTS | Dual-band |
| | 736347 | 739785 | 741790 | 80010274 |
| | 736348 | 738187 | | |
| | 736349 | 739404 | | |
| | 736350 | 737190 | | |
| | 736351 | | | |
| | 738664 | | | |
| | 738192 | | | |

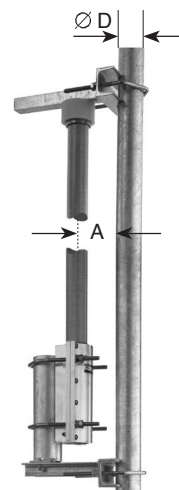

Side-mounting is possible for four fixed distances between the tubular mast and the antenna:

| 800/900 MHz (holes 1 and 3) | | | 1800/2000 MHz (hole 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|------------------------------|------------------------------|--------------------------|-------|--|--------|--------|--------|----------------------------------|--|--|--|--------|------------------------------|-----------------|-------|--|--------|--------|--------|----------------------------------|--|--|--|--------------|------------------------------|-----------|-------|--|-------|--------|----------------------------------|--|--|
| <p>A = 100 mm = 0.3 λ A = 160 mm = 0.5 λ A = 240 mm = 0.75 λ</p> | | | <p>A = 80 mm = 0.5 λ</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>Pipe D</th> <th>Horizontal Radiation Pattern</th> <th>Spacing A Curve</th> </tr> </thead> <tbody> <tr> <td rowspan="3">40 mm</td> <td rowspan="3"></td> <td>100 mm</td> </tr> <tr> <td>160 mm</td> </tr> <tr> <td>240 mm</td> </tr> <tr> <td colspan="2">direction from mast to antenna →</td> <td></td> </tr> </tbody> </table> | Pipe D | Horizontal Radiation Pattern | Spacing A Curve | 40 mm | | 100 mm | 160 mm | 240 mm | direction from mast to antenna → | | | <table border="1"> <thead> <tr> <th>Pipe D</th> <th>Horizontal Radiation Pattern</th> <th>Spacing A Curve</th> </tr> </thead> <tbody> <tr> <td rowspan="3">40 mm</td> <td rowspan="3"></td> <td>100 mm</td> </tr> <tr> <td>160 mm</td> </tr> <tr> <td>240 mm</td> </tr> <tr> <td colspan="2">direction from mast to antenna →</td> <td></td> </tr> </tbody> </table> | Pipe D | Horizontal Radiation Pattern | Spacing A Curve | 40 mm | | 100 mm | 160 mm | 240 mm | direction from mast to antenna → | | | <table border="1"> <thead> <tr> <th>Pipe D Curve</th> <th>Horizontal Radiation Pattern</th> <th>Spacing A</th> </tr> </thead> <tbody> <tr> <td>40 mm</td> <td rowspan="2"></td> <td rowspan="2">80 mm</td> </tr> <tr> <td>100 mm</td> </tr> <tr> <td colspan="2">direction from mast to antenna →</td> <td></td> </tr> </tbody> </table> | Pipe D Curve | Horizontal Radiation Pattern | Spacing A | 40 mm | | 80 mm | 100 mm | direction from mast to antenna → | | |
| Pipe D | Horizontal Radiation Pattern | Spacing A Curve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 mm | | 100 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 160 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 240 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| direction from mast to antenna → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pipe D | Horizontal Radiation Pattern | Spacing A Curve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 mm | | 100 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 160 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 240 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| direction from mast to antenna → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pipe D Curve | Horizontal Radiation Pattern | Spacing A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 mm | | 80 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| direction from mast to antenna → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Side-mounting Brackets Omnidirectional Antennas 900


For mast diameters of 40 – 105 mm

| | |
|---------------------------|----------------------|
| Type No. | K61335 |
| Bracket | At the bottom only |
| Fits for antenna type no. | K75116.. K75156.. |

Side mounting is possible for three fixed distances between the tubular mast and the antenna:

- 100 mm = 0.3λ
- 160 mm = 0.5λ
- 240 mm = 0.75λ

| Pipe D | Horizontal Radiation Pattern | Spacing A Curve | Additional gain to the nominal value of the antenna gain |
|--------|------------------------------|--------------------|--|
| 40 mm | | 100 mm | 2 dB |
| | | 160 mm | 3 dB |
| | | 240 mm | 2 dB |
| 100 mm | | 100 mm | 2.5 dB |
| | | 160 mm | 3.5 dB |
| | | 240 mm | 2.5 dB |

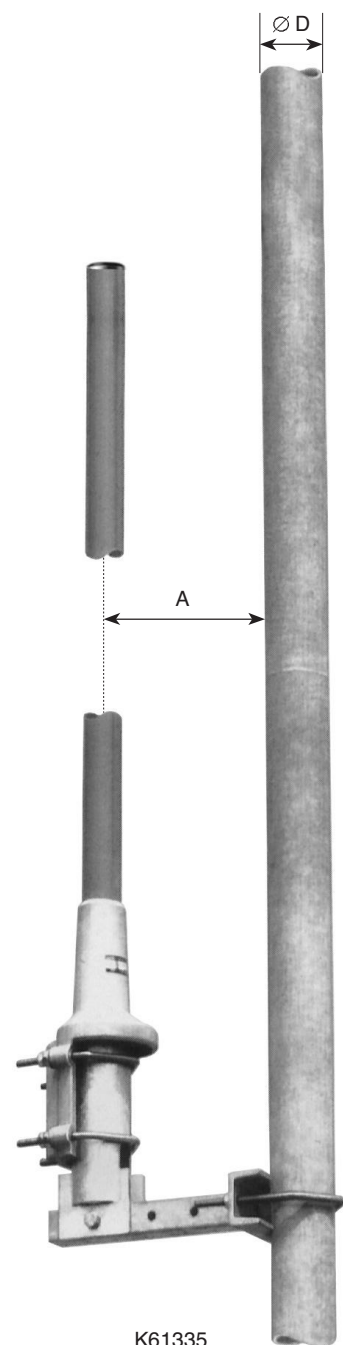


K61335

All Panels Accessories Azimuth Adjustment Tool

Type No. 738440

Precise azimuth adjustment for mast mounted antennas can easily be achieved by using the azimuth adjustment tool.

This tool is suitable to all types of Panels and Tri-Sector Pipe Antennas with a maximum width of 315 mm.

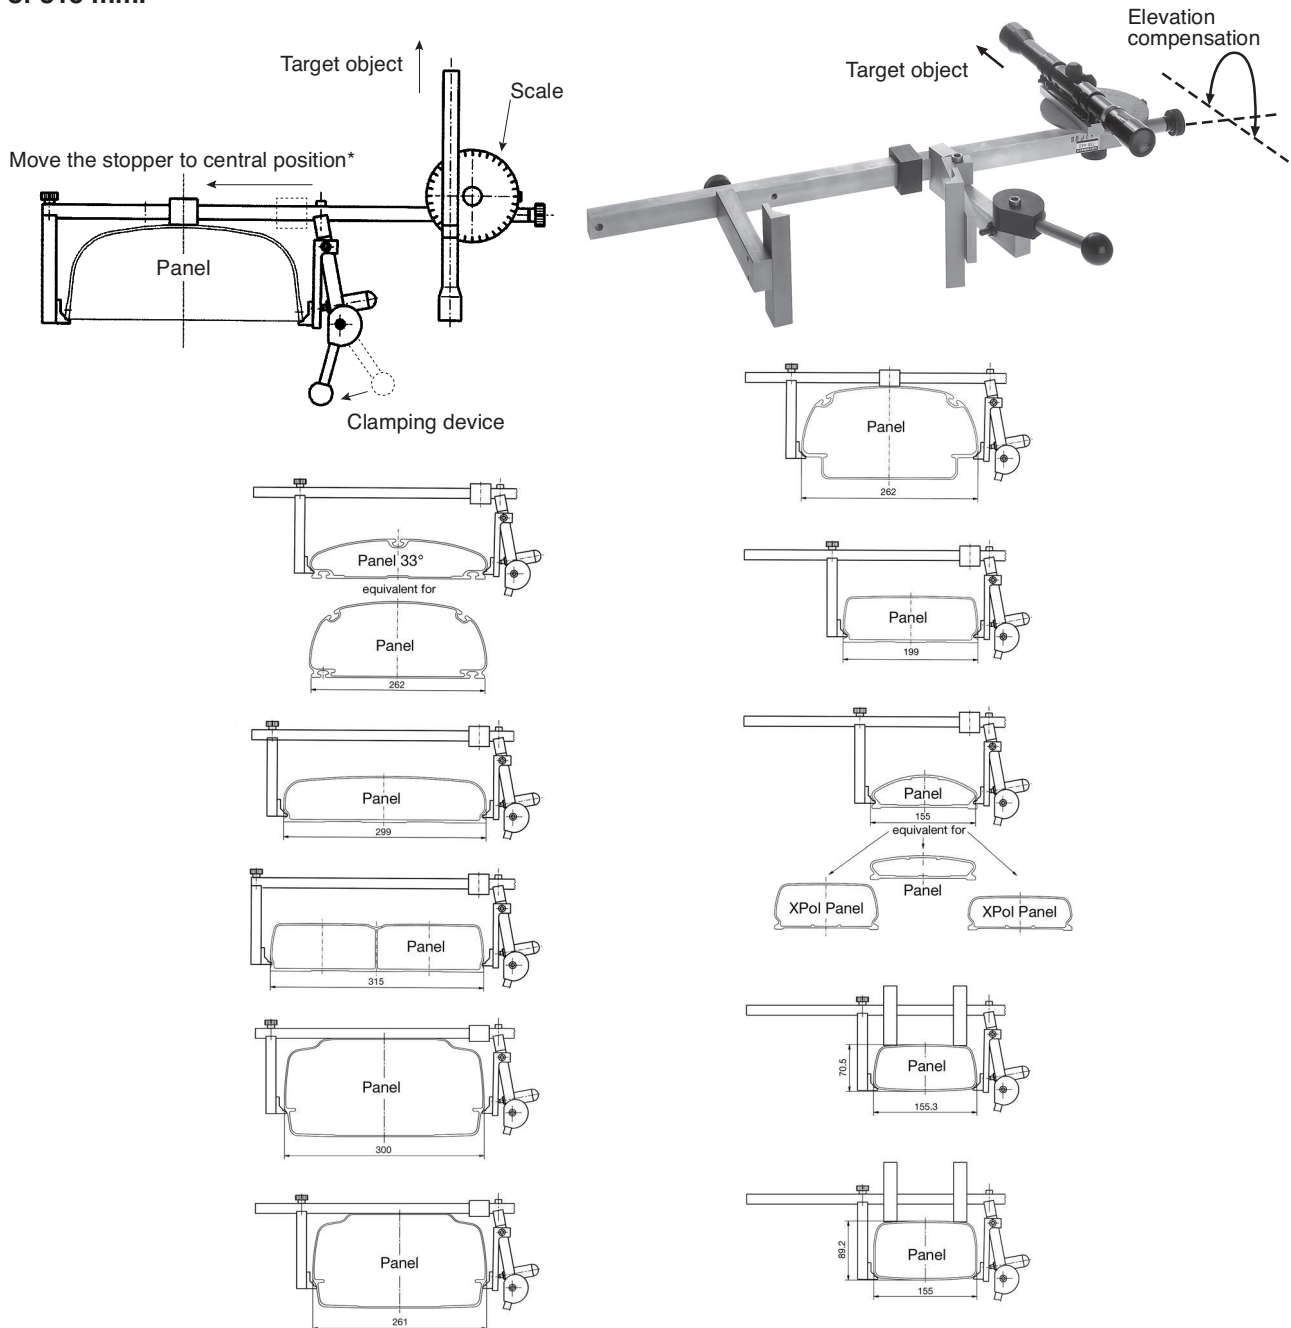

Instruction:

- Use a map to work out the angle between the designed antenna azimuth and target (church, building, mountain peak).
- Set this angle on the scale of the adjustment tool.
- Place the adjustment tool onto the antenna and tighten the clamping device.
- Use the telescope to aim at the target object, if necessary, use elevation compensation.
- Then rotate the antenna until the target object appears in the telescope.

* Observe the position of the stopper when fitting the azimuth adjustment tool.


Kathrein Installation Tool for Triple-band Antennas Type No. 85010005

Please note: To avoid any damage to the interfaces, please ensure that only suitable tools are used. To tighten the feederline connector interfaces, we strongly recommend using a special Kathrein installation tool (as shown below) in combination with a standard torque-wrench.

Kathrein installation set: Type No. 85010005

Set has to be ordered separately!


Set consists of two spanners of 27 and 32 mm width.

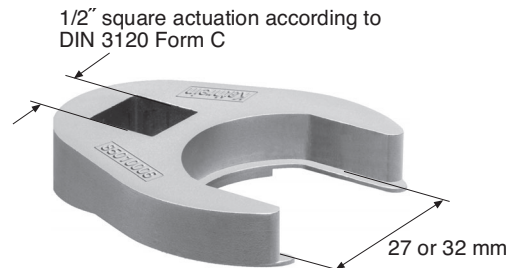

These tools are suitable for 7-16 connectors with a wrench size of 27 or 32 mm.

Tighten nut within a torque range of 25 – 33 Nm depending on connector manufacturers' specifications.

Description of connector arrangement:

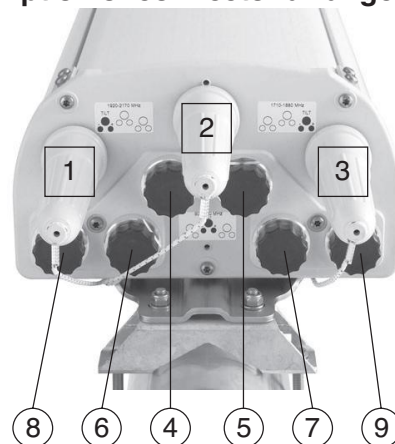

Adjustment mechanisms (1 – 3)

Feederline connectors (4 – 9)

There are six feederline connectors and three adjustment mechanisms located at the bottom of the antenna.

For detailed information about feederline installation for Triple-band Antennas please see Kathrein RET system brochure.

Part 2:

Filters, Combiners and Amplifiers for Mobile Communications