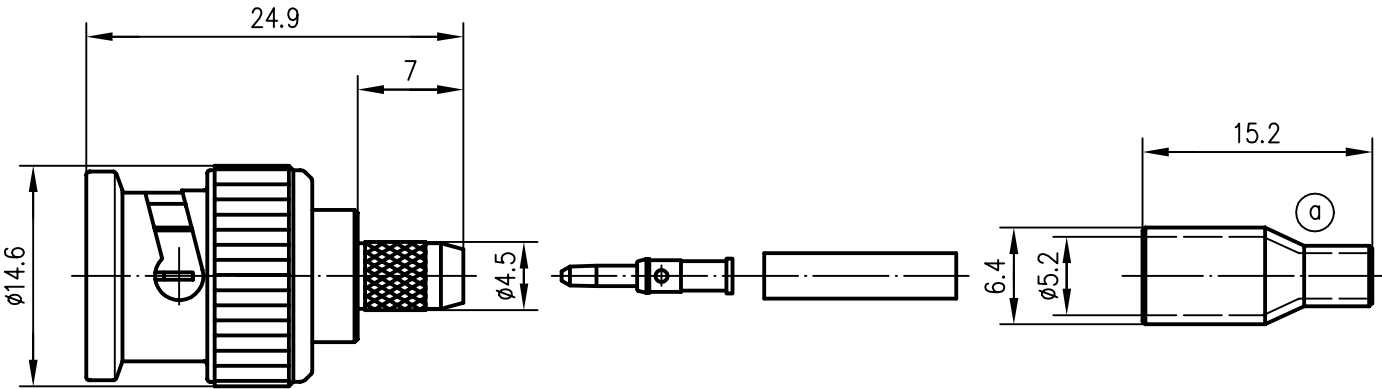




Anschlußmaße nach IEC 169-8 / dimensions according IEC 169-8



Außenleiter / outer conductor	CuZn39Pb3	Cu2Ni5
Innenleiter / inner conductor	CuZn39Pb3	Cu1Ni2Au0.8
Isolierung / insulator	PE-LD, POM	
sonstige Metallteile / other metal parts	GD-ZnAl4Cu1	Zn/Cu6 Ni6
Crimprohr / crimp ferrule	CuZn38Pb1.5	Cu2Ni5
Kabel / cable	RG-179B/U, RG-187A/U, 0.3LS/1.7S	
Montage / assembly	A2505	

a	5077	25.10.94	BJ	93	Datum/date	Name/name	Werkstoff/ material
				gez./drawn	25.03.	JB	
				gepr./appr.	25.03.93	Poe	Oberfläche/ finish
				Norm/stand.			
				Maßstab/scale	Benennung/title		
				2:1	BNC-Kabelstecker BNC-Straight-Plug		
				untol. Maße/ dim. without tolerances according to	Untert./doc.type	Zeichnungsnr./drawing no.	 Maße/dimensions: mm Original: DIN A4
					K	J01002A0036	
					Ersatz für/ replaces		